
HA16666P/FP

600kHz PWM Controlled Switching Regulator

HITACHI

Description

The HA16666P/FP is a voltage mode PWM (pulse width modulation) control IC for switching regulator control. It can drive a power MOS FET efficiently on 600 kHz. Its standby current is 0.3 mA (max), and it is used as the primary control power supply.

Functions

- +5 V reference voltage circuit
- Triangular waveform oscillator
- PWM comparator
- Output circuit (Totem pole output)
- Overcurrent protection circuit (with one-pulse latch mode)
- Undervoltage lockout protection circuit
- Soft start and quick shutdown function
- Remote control function
- Comparator with internal 1.3 V reference voltage

Features

- High-speed switching;
tr = 80 ns (15 V amplitude)
tf = 40 ns (15 V amplitude)
- Low power dissipation;
0.3 mA max in standby state
12 mA max in operation state ($V_{IN} = 15$ V)
- Dual-slope highly accurate dead-band duty setup circuit; Setup accuracy $D_u = \pm 3\%$ (max)
- Wide output pulse width control range; 0 to 75%


HA16666P/FP

- Undervoltage lockout protection;
 V_{IN} high threshold voltage 10 V typ
 V_{IN} low threshold voltage 8 V typ
- Two input threshold voltage for overcurrent protection comparator;
 fixed voltage (1.3 V)
 variable voltage
- Double pulse output protection by overcurrent protection circuit with one-pulse latch mode
- Wide input supply voltage range; $V_{CC} = 11$ to 40 V

Ordering Information

| Type | Package |
|-----------|---------|
| HA16666P | DP-16 |
| HA16666FP | FP-16DA |


Pin Arrangement

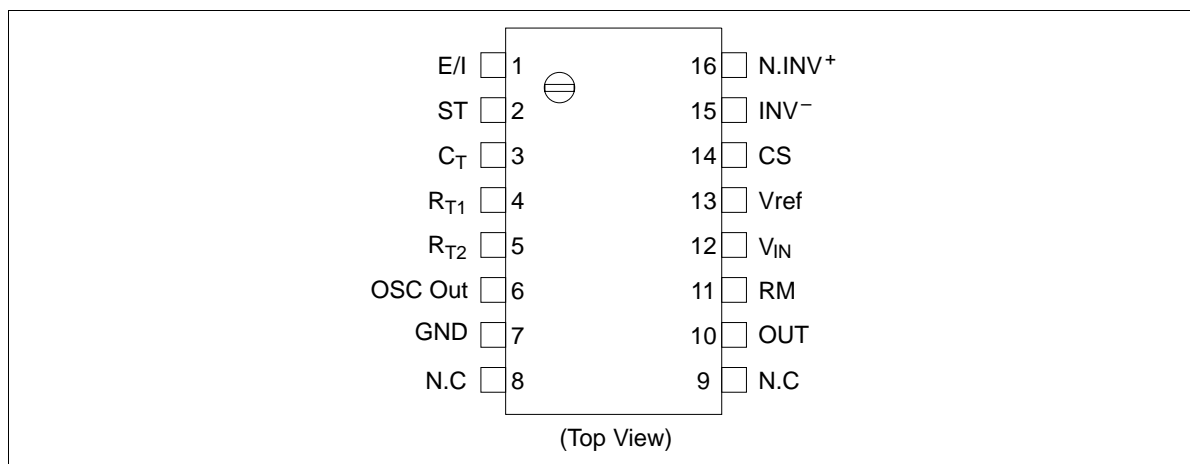

Pin Functions

| Pin No. | Symbol | Description |
|---------|--------------------|---|
| 1 | E/I | Error input |
| 2 | ST | Soft start |
| 3 | C _T | Timing capacitance |
| 4 | R _{T1} | Timing resistor (rise section) |
| 5 | R _{T2} | Timing resistor (fall section) |
| 6 | OSC Out | Triangular waveform oscillator |
| 7 | GND | Ground |
| 8 | N.C | No connect |
| 9 | N.C | No connect |
| 10 | OUT | Pulse output |
| 11 | RM | Remote control |
| 12 | V _{IN} | Power supply voltage |
| 13 | Vref | Reference voltage (5 V) output |
| 14 | CS | Comparator input (-) with reference voltage (1.3 V) |
| 15 | INV ⁻ | Comparator input (-) for overcurrent protection |
| 16 | N.INV ⁺ | Comparator input (+) for overcurrent protection |

Block Diagram

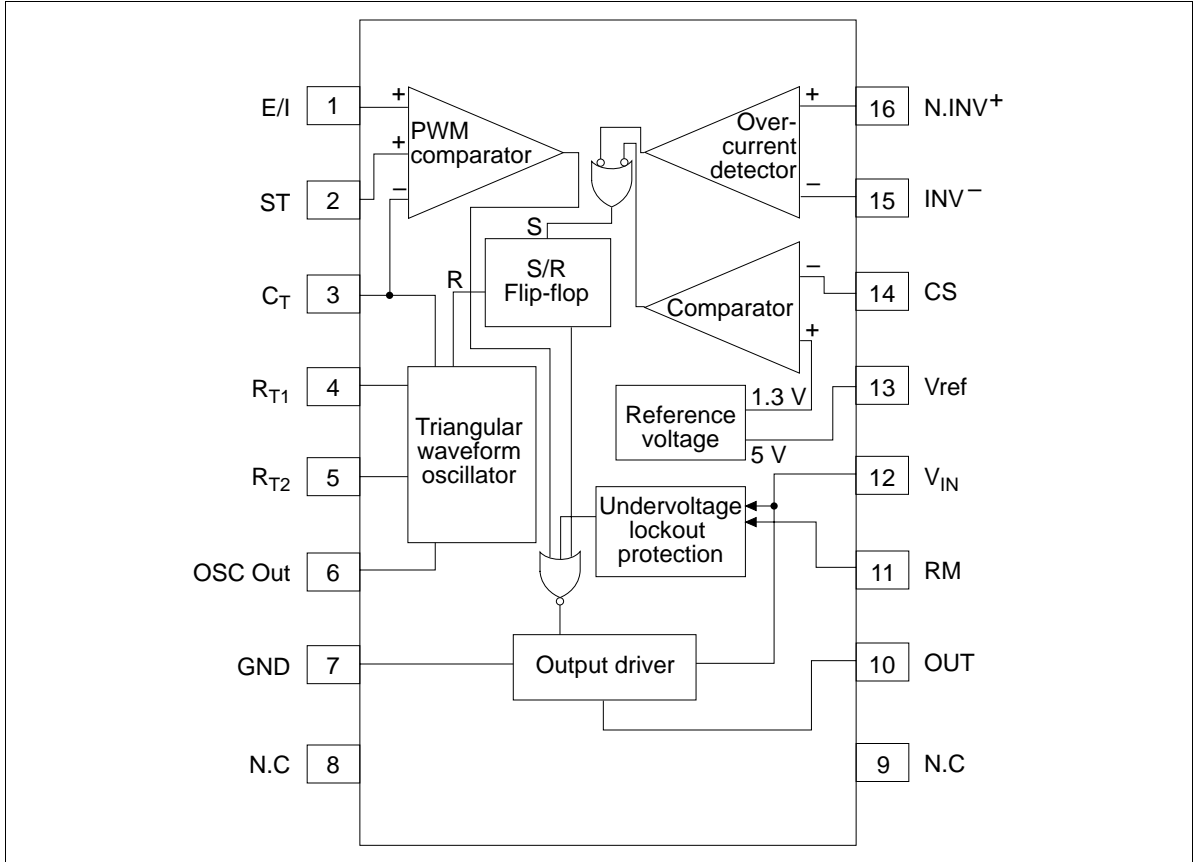

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| Item | Symbol | Rating | | Unit | |
|-------------------------------|-----------|--------------------|--------------------|-------|----|
| | | HA16666P | HA16666FP | | |
| Power supply voltage | V_{IN} | +40 | +40 | V | |
| Output current (Push-pull) | DC | $I_{O(DC)}$ | 100 | 100 | mA |
| | Peak | $I_{O(peak)}$ | 500*1 | 500*1 | mA |
| Error input | V_{EI} | Vref | Vref | V | |
| OSC input voltage | V_{OSC} | $V_{IN} - 3V_{BE}$ | $V_{IN} - 3V_{BE}$ | V | |
| CS input voltage | V_{CS} | Vref | Vref | V | |
| RM input voltage | V_{RM} | V_{IN} | V_{IN} | V | |
| RT2 input current | I_{R2} | 1 | 1 | mA | |
| RT1 input current | I_{R1} | 1 | 1 | mA | |
| Power dissipation | P_T | 680*2 | 680*3 | mW | |
| Operation temperature | Topr | -20 to +85 | -20 to +85 | °C | |
| Storage temperature | Tstg | -55 to +125 | -55 to +125 | °C | |

Notes: 1. Value at 300 ns of switching time

2. Value at $T_a \leq 45^\circ\text{C}$. If $T_a > 45^\circ\text{C}$, derated by 8.3 mW/°C

3. Value under the condition of 40 mm × 40 mm × 0.8 t ceramics board epoxy board


Electrical Characteristics ($V_{IN} = 15\text{ V}$, $T_a = 25^\circ\text{C}$, $f_{osc} = 300\text{ kHz}$)

| Item | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------|--------------------------------------|-----------|------|------|------|---|
| Voltage reference | Output voltage | Vref | 4.75 | 5.00 | 5.25 | V no load |
| | Line regulation | Line | — | 50 | 100 | mV $V_{IN} = 11\text{ to }40\text{ V}$ |
| | Load regulation | Load | — | 9 | 20 | mV $I_O = 0\text{ to }10\text{ mA}$ |
| | Temperature stability | V_{RTC} | — | +60 | — | ppm/°C no load |
| | Short circuit current | I_{OS} | 10 | 35 | — | mA $V_{ref} = 0\text{ V}$ |
| Triangular waveform oscillator | Maximum frequency | f_{max} | 600 | — | — | kHz $C_T = 150\text{ pF}$ |
| | Minimum frequency | f_{min} | — | — | 1 | kHz $C_T = 0.15\text{ }\mu\text{F}$ |
| | Frequency accuracy | f_{der} | -10 | 0 | +10 | % |
| | Voltage stability | f_T | — | 1 | — | % $11\text{ V} \leq V_{IN} \leq 40\text{ V}$ |
| | Temperature coefficient of frequency | f_i | — | 2 | — | % $-20^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ |

Electrical Characteristics ($V_{IN} = 15\text{ V}$, $T_a = 25^\circ\text{C}$, $f_{osc} = 300\text{ kHz}$) (cont)


| Item | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------|---|-------------------|-------------------|---------|-----------|---------------|---|
| PWM comparator | Maximum duty cycle | Du | 75 | — | — | % | |
| | Input bias current | I_b | -2 | — | — | μA | Pin 1 |
| | Low-level threshold voltage | V_{OSCL} | — | 1.5 | — | V | Pin 1 |
| | High-level threshold voltage | V_{OSCH} | — | 2.5 | — | V | Pin 1 |
| | Dead-band duty accuracy | ΔDu | — | ± 1 | ± 3 | % | |
| | Dead-band duty input voltage stability | D_T | — | 1 | — | % | $11\text{ V} \leq V_{IN} \leq 40\text{ V}$ |
| | Temperature coefficient of dead-band duty | D_{UT} | — | 1 | — | % | $-20^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ |
| Overcurrent detector | Input bias current | I_{B1} | -2 | — | — | μA | Pin 15, 16 |
| | Common-mode input voltage range | V_{CM1} | 0 to $V_{IN} - 3$ | — | — | V | Pin 15, 16 |
| Comparator | Input bias current | I_{B2} | — | 5 | 13 | μA | $V_{CS} = 5\text{ V}$ |
| | Input threshold voltage | V_{th} | 1.2 | 1.3 | 1.4 | V | |
| | Input voltage range | V_{CS} | 0 | — | V_{ref} | V | |
| Remote controller | Input current to remote control pin | I_{RM} | — | — | 1.5 | mA | $V_{RM} = 5\text{ V}$ |
| | Input high-voltage | V_{INH} | 1 | — | — | V | |
| | Input low-voltage | V_{INL} | — | — | 0.4 | V | |
| Undervoltage lockout protector | High-level threshold voltage | V_{THH} | 9 | 10 | 11 | V | |
| | Low-level threshold voltage | V_{THL} | 7 | 8 | 9 | V | |
| | Hysteresis width | Hys | 1.5 | 2.0 | 2.8 | V | |
| Output driver | Output low-level | V_L | — | 0.7 | 1.4 | V | $I_{O(SINK)} = 10\text{ mA}$ |
| | Output high-level | V_H | $V_{IN} - 2.2$ | — | — | V | $I_{O(SOURCE)} = 10\text{ mA}$ |
| | Output rise time | t_r | — | 80 | 150 | ns | Note 1 |
| | Output fall time | t_f | — | 40 | 100 | ns | Note 1 |
| Total current | Standby current | I_{CS} | — | 0.15 | 0.3 | mA | Note 1 |
| | Operation current | I_{CL} | — | 8 | 12 | mA | Note 1 |

Note: 1. Measurement conditions of I_{CS} , I_{CL} , t_r , t_f are defined as following diagram.






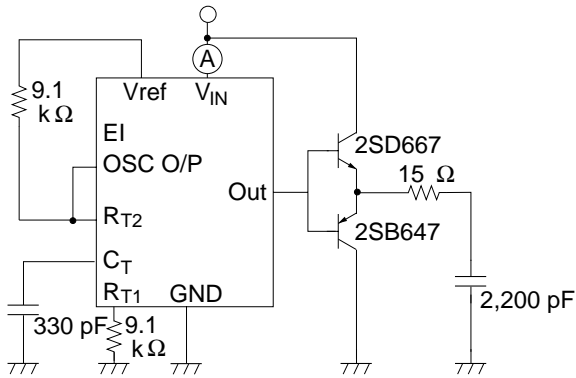


h_{FE} of 2SD667 is defined as 60 min and 200 max.


Waveform Timing

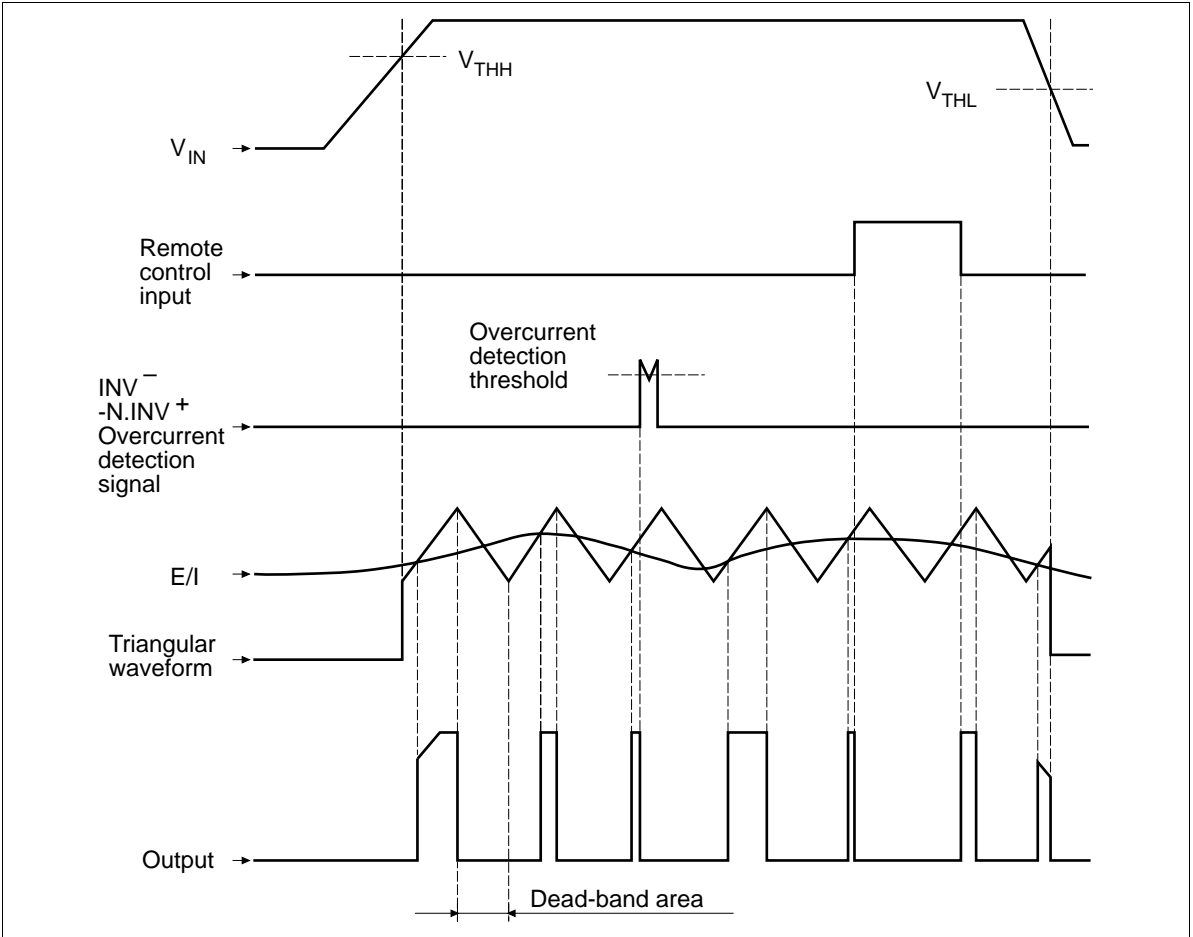


Characteristic Curves

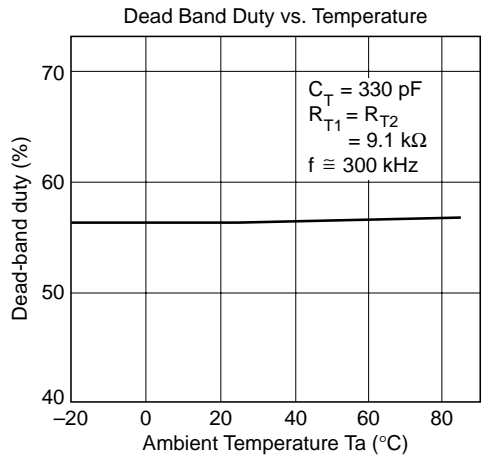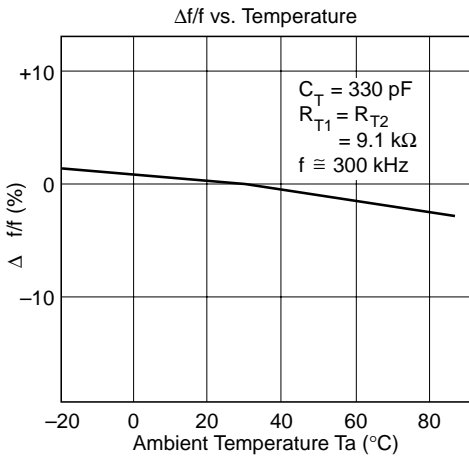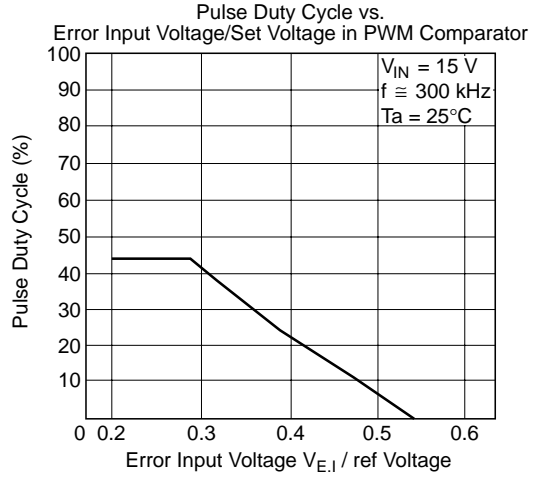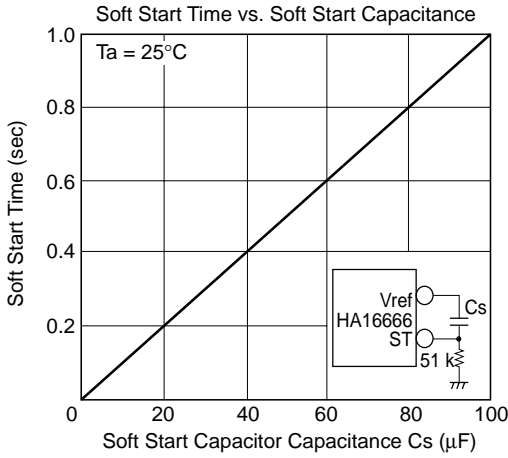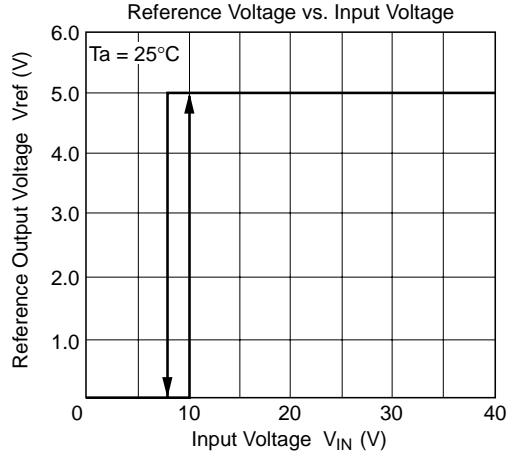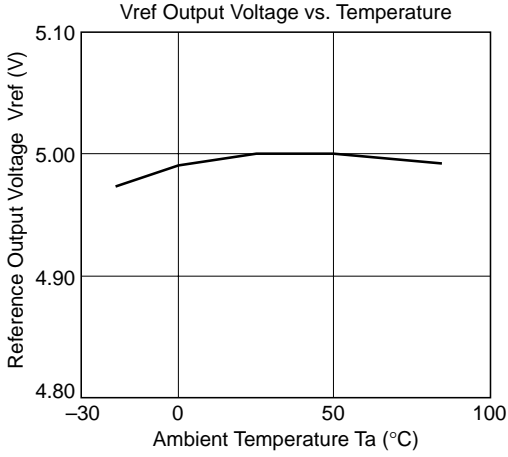

V_{IN} Bias Point

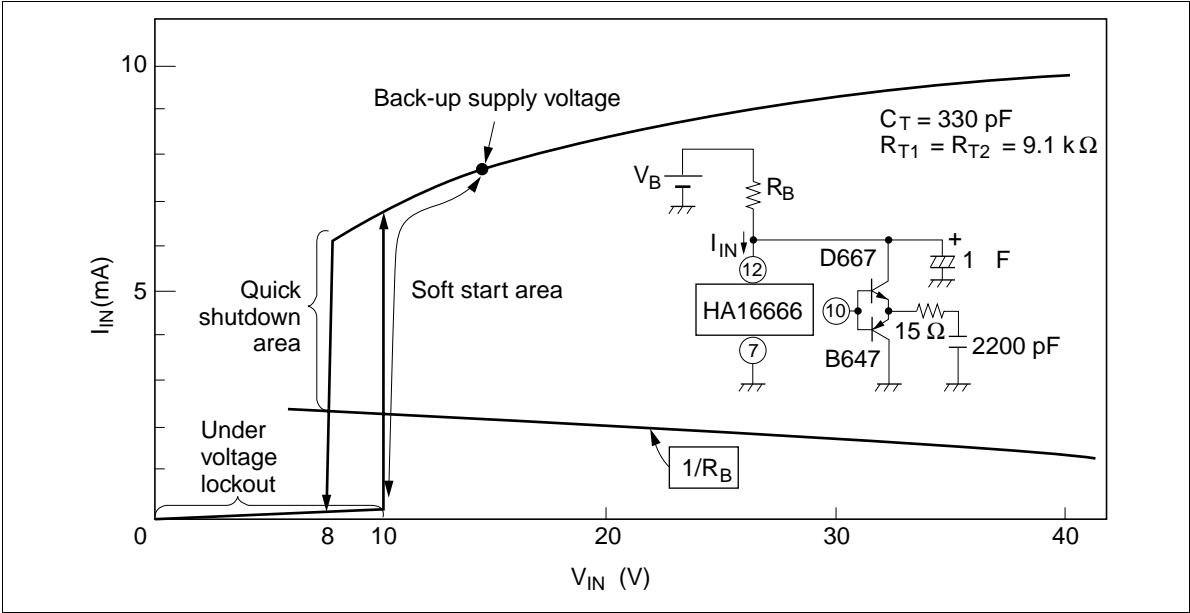

Formula for the oscillation frequency

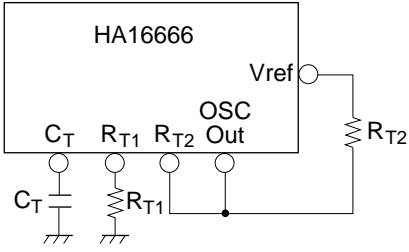


HA16666 summary formula of the oscillation frequency
 $\log(f) \approx a \times \log\left(\frac{R_{T1}}{R_{T2}}\right) + b$

↑
(= R_{T2})

The following table show empirical values of a and b for different values of C_T .


| C_T | a | b |
|--------------|-------|------|
| 180pF | -0.50 | 7.58 |
| 330pF | -0.61 | 7.86 |
| 1000pF | -0.75 | 8.09 |
| 0.01 μ F | -0.86 | 7.57 |
| 0.15 μ F | -0.86 | 6.45 |

Frequency vs. R_{T1} , R_{T2} Dependence

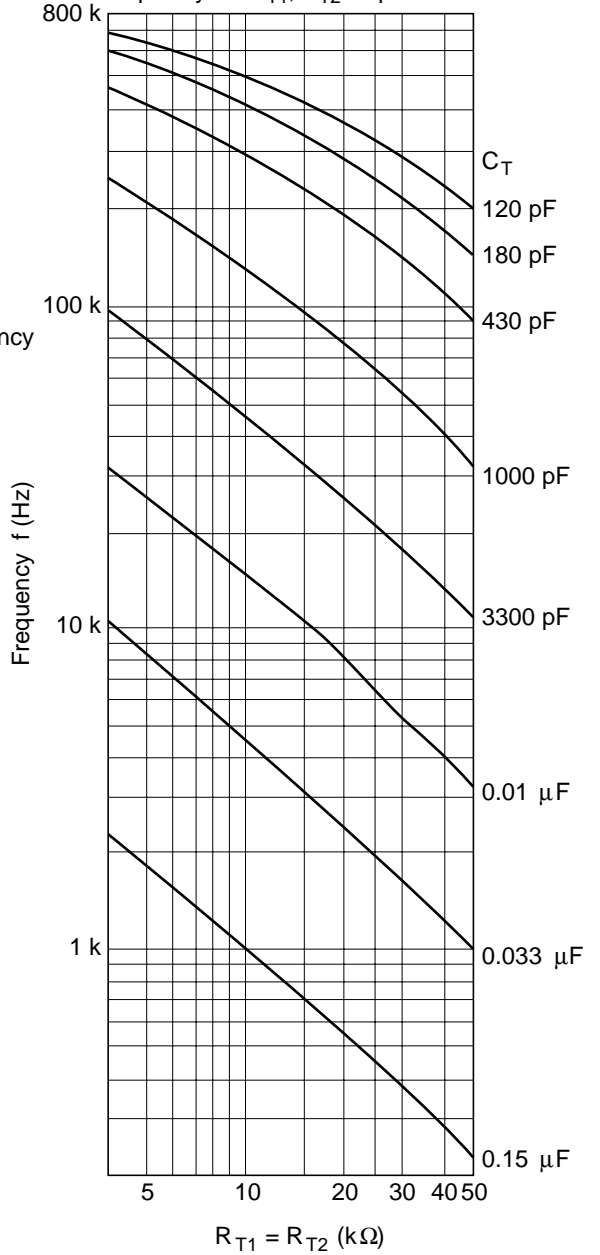


System Connection Example

Over current protection; Resistance sensing method

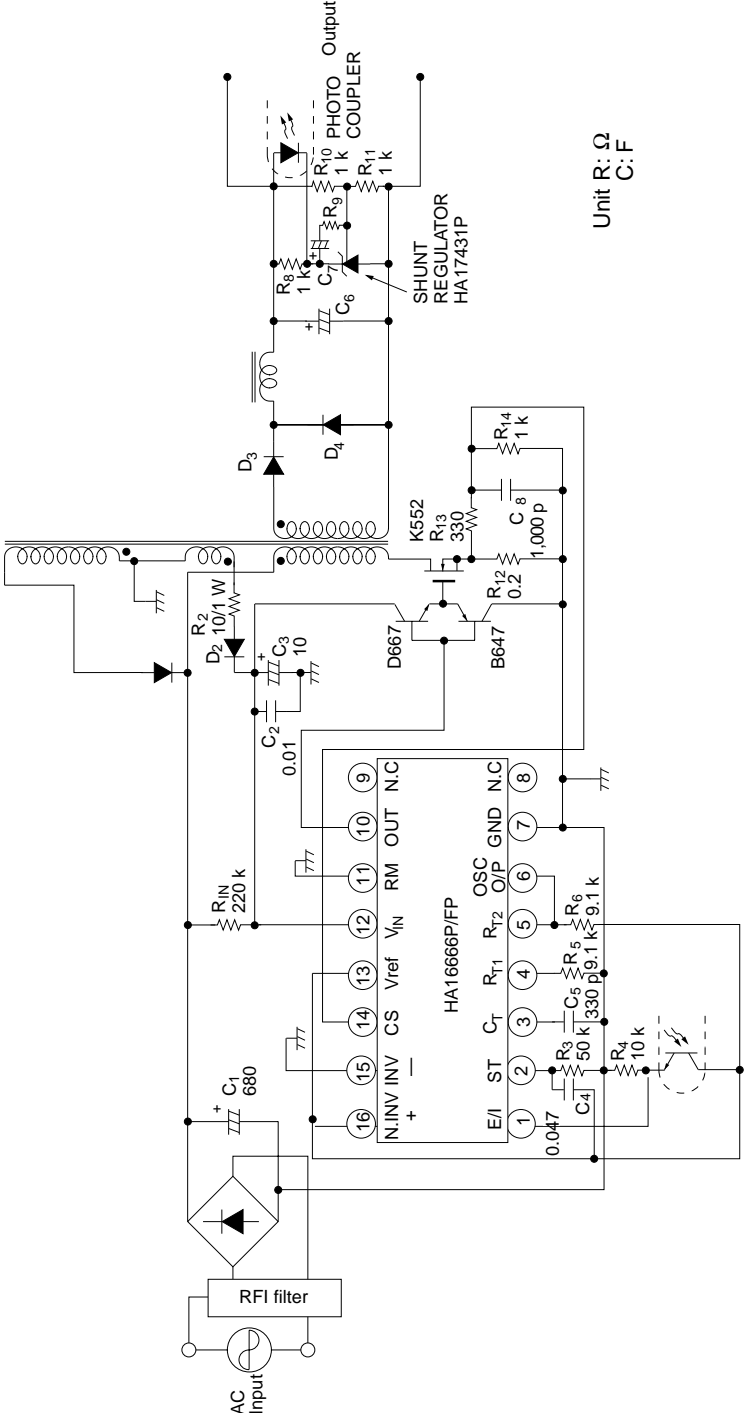


Unit R: Ω
C: F

Over current protection; Current transformer method

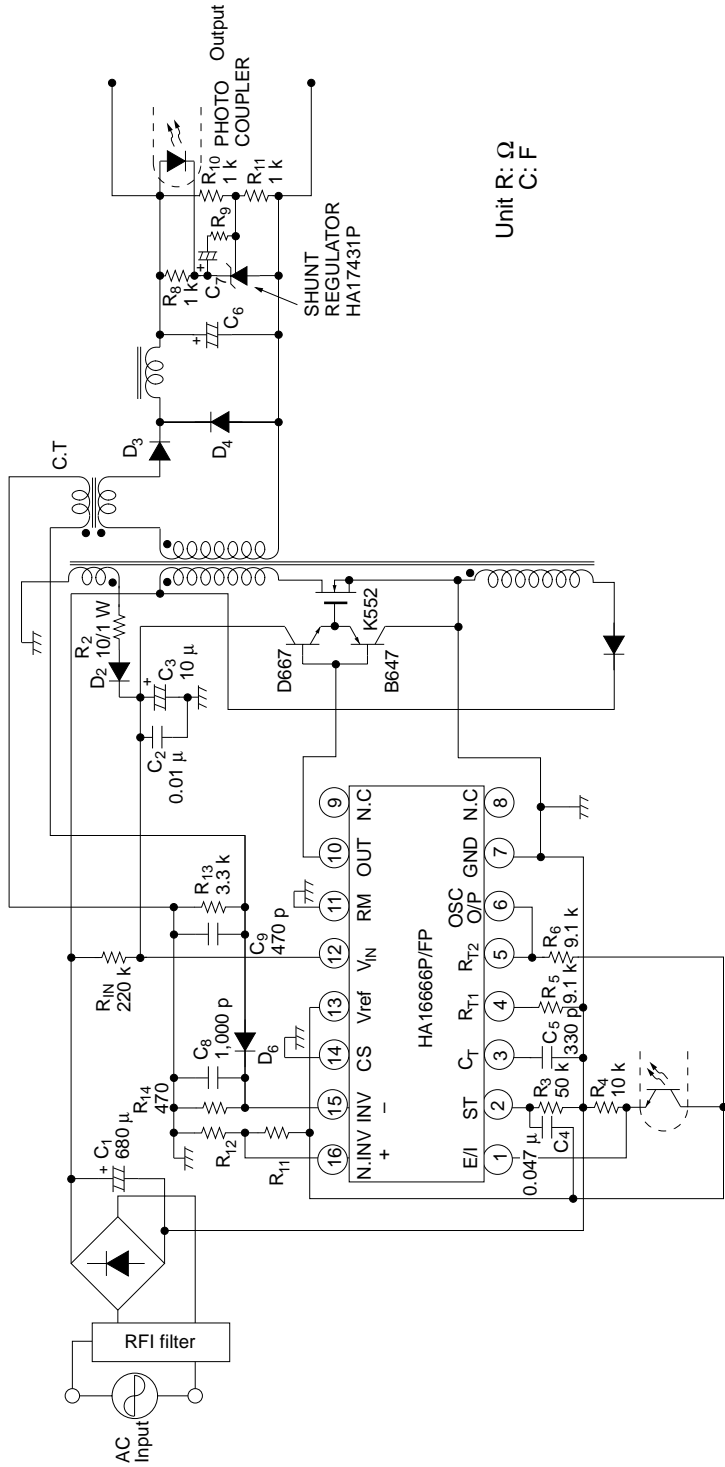


Over current protection; Current transformer method

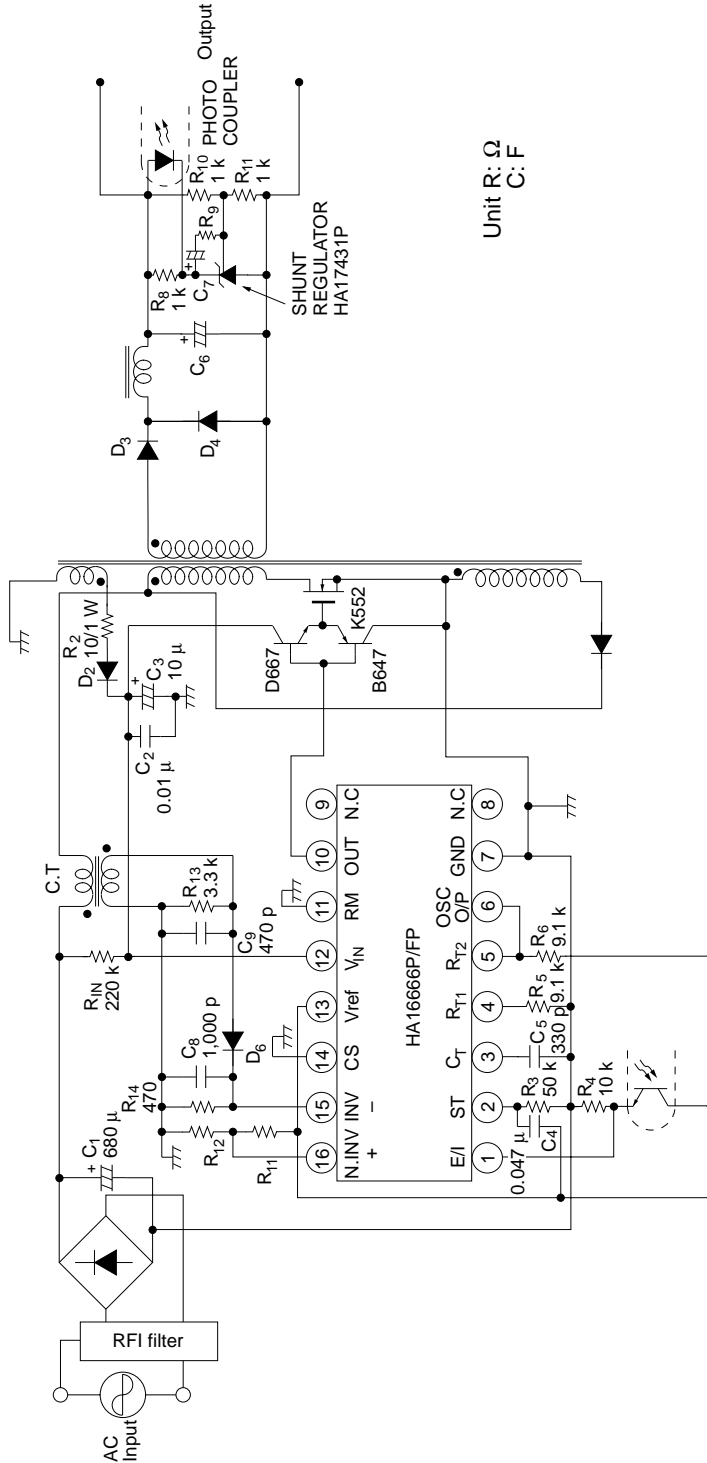

Unit R: Ω
C: F


Package Dimensions

Unit: mm

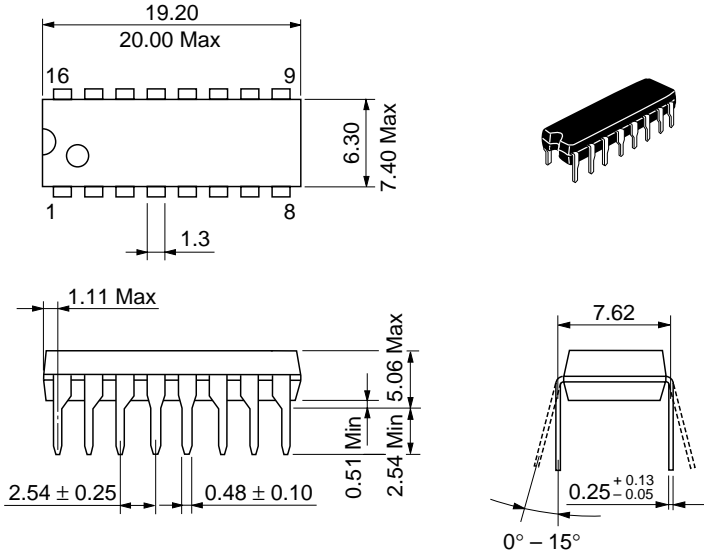

| | |
|------------------------|----------|
| Hitachi Code | DP-16 |
| JEDEC | Conforms |
| EIAJ | Conforms |
| Mass (reference value) | 1.07 g |

Unit: mm

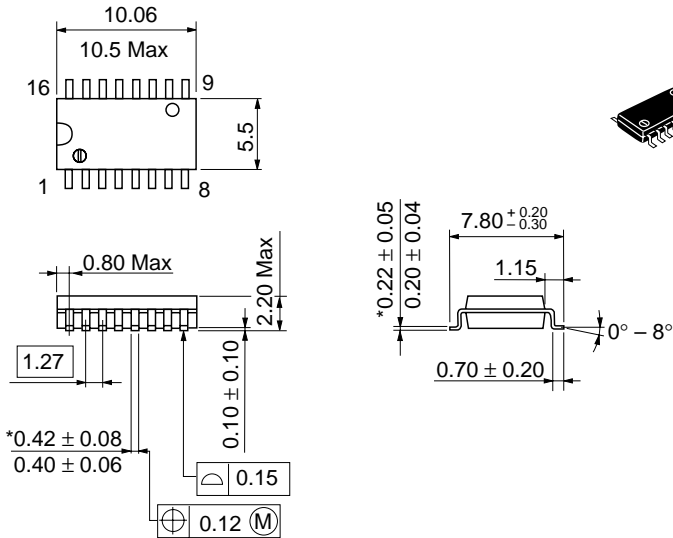

| | |
|------------------------|----------|
| Hitachi Code | FP-16DA |
| JEDEC | — |
| EIAJ | Conforms |
| Mass (reference value) | 0.24 g |

*Dimension including the plating thickness
Base material dimension

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohite-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica : <http://semiconductor.hitachi.com/>
 Europe : <http://www.hitachi-eu.com/hel/ecg>
 Asia (Singapore) : <http://www.has.hitachi.com.sg/grp3/sicd/index.htm>
 Asia (Taiwan) : http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
 Asia (HongKong) : <http://www.hitachi.com.hk/eng/bo/grp3/index.htm>
 Japan : <http://www.hitachi.co.jp/Sicd/indx.htm>

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe GmbH
Electronic components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.

HITACHI