



SAW Components

Data Sheet B4234





SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz


Data Sheet



Ceramic package **QCC10G**

Features

- Low-loss RF filter for mobile telephone GSM 850/1900 system , receive path
- Usable passband:
Filter 1 (GSM850): 25 MHz
Filter 2 (GSM1900): 60 MHz
- Unbalanced to balanced operation of both filters
- Impedance transformation from 50 Ω to 150 Ω for both filters
- Suitable for GPRS class 1 to 12
- Ceramic package for **Surface Mounted Technology (SMT)**
- RoHS compliant

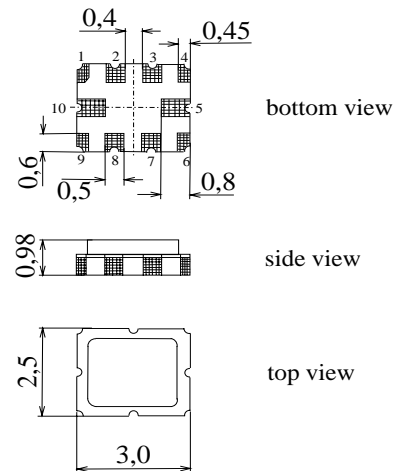


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight **27 mg**

Pin configuration

- 1, 2 Output, balanced [Filter 1]
- 3, 4 Output, balanced [Filter 2]
- 6 Input [Filter 2]
- 7,8 Case ground
- 9 Input [Filter 1]
- 5, 10 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4234	B39202-B4234-H910	C61157-A7-A142	F61074-V8174-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^*	50*	V	Machine Model, 10 pulses
Input power at Tx bands:				
GSM850, GSM900	P_{IN}	15	dBm	peak power of GSM signal, duty cycle 4:8
GSM1800, GSM1900				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses




Characteristics Filter 1 (GSM850)

Operating temperature range: $T = -20$ to $+75^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 150\ \Omega$ (balanced) || $56\ \text{nH}$


			min.	typ.	max.	
Center frequency	f_c		—	881,5	—	MHz
Maximum insertion attenuation	α_{max}	869,0 ... 894,0 MHz	—	1,8	2,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$	869,0 ... 894,0 MHz	—	0,6	1,0	dB
Input VSWR		869,0 ... 894,0 MHz	—	1,8	2,1	
Output VSWR		869,0 ... 894,0 MHz	—	1,8	2,1	
Output amplitude balance (S_{31}/S_{21})		869,0 ... 894,0 MHz	-1,5		1,0	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)		869,0 ... 894,0 MHz	-10,0		12,0	degree
Absolute attenuation	α_{abs}	10,0 ... 480,0 MHz	45,0	50,0	—	dB
		480,0 ... 849,0 MHz	30,0	34,0	—	dB
		915,0 ... 1000,0 MHz	23,0	27,0	—	dB
		1000,0 ... 3500,0 MHz	30,0	34,0	—	dB
		3500,0 ... 4500,0 MHz	22,0	26,0	—	dB
		4500,0 ... 6000,0 MHz	14,0	17,0	—	dB



Transfer function of filter 1 (narrow band)

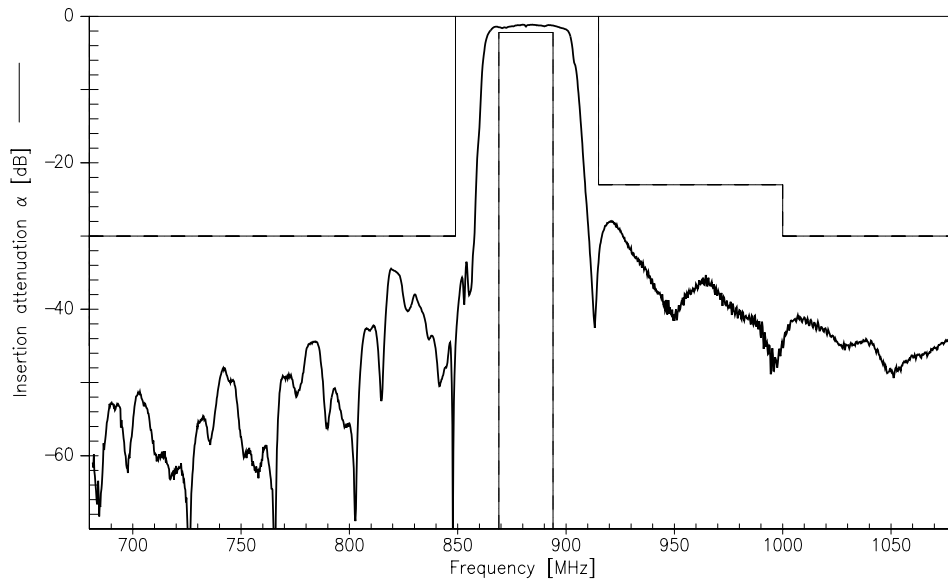

Transfer function of filter 1 (wide band)

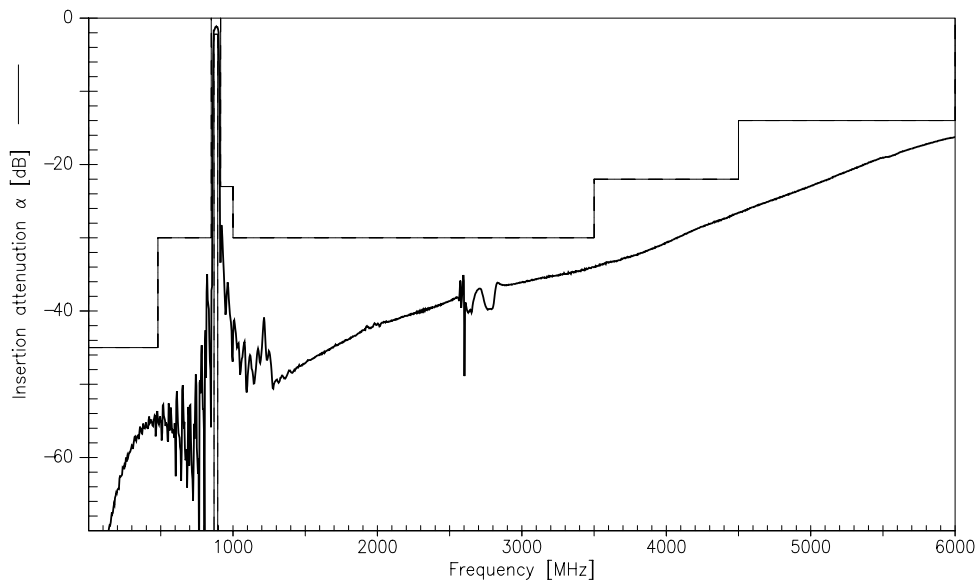



Characteristics Filter 2 (GSM1900)

Operating temperature range: $T = +25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 150 \text{ } \Omega$ (balanced) || 12 nH

				min.	typ.	max.		
Center frequency		f_c		—	1960,0	—		MHz
Maximum insertion attenuation	1930,0 ... 1990,0	MHz	α_{\max}	—	2,2	2,5		dB
Amplitude ripple (p-p)	1930,0 ... 1990,0	MHz	$\Delta\alpha$	—	0,6	1,0		dB
Input VSWR	1930,0 ... 1990,0	MHz		—	1,7	2,0		
Output VSWR	1930,0 ... 1990,0	MHz		—	1,7	2,0		
Output amplitude balance (S_{31} / S_{21})	1930,0 ... 1990,0	MHz		-1,3		1,3		dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^\circ$)	1930,0 ... 1990,0	MHz		-12,0		8,0		degree
Absolute attenuation			α_{abs}					
	10,0 ... 1510,0	MHz		40,0	43,0	—		dB
	1510,0 ... 1820,0	MHz		30,0	34,0	—		dB
	1820,0 ... 1880,0	MHz		26,0	30,0	—		dB
	1880,0 ... 1910,0	MHz		12,0	16,0	—		dB
	2020,0 ... 2080,0	MHz		12,0	17,0	—		dB
	2080,0 ... 2400,0	MHz		24,0	29,0	—		dB
	2400,0 ... 4500,0	MHz		30,0	32,0	—		dB
	4500,0 ... 6000,0	MHz		22,0	25,0	—		dB




Characteristics Filter 2 (GSM1900)

Operating temperature range: $T = -20$ to $+75^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 150 \Omega$ (balanced) || 12 nH


			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}	1930,0 ... 1990,0 MHz	—	2,3	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$	1930,0 ... 1990,0 MHz	—	0,6	1,0	dB
Input VSWR		1930,0 ... 1990,0 MHz	—	1,9	2,2	
Output VSWR		1930,0 ... 1990,0 MHz	—	1,9	2,2	
Output amplitude balance (S_{31}/S_{21})		1930,0 ... 1990,0 MHz	-1,3		1,3	dB
Output phase balance ($\phi(S_{31})-\phi(S_{21})+180^{\circ}$)		1930,0 ... 1990,0 MHz	-12,0		8,0	degree
Absolute attenuation	α_{abs}	10,0 ... 1510,0 MHz	40,0	43,0	—	dB
		1510,0 ... 1820,0 MHz	30,0	34,0	—	dB
		1820,0 ... 1880,0 MHz	26,0	30,0	—	dB
		1880,0 ... 1910,0 MHz	10,0	13,0	—	dB
		2020,0 ... 2080,0 MHz	12,0	17,0	—	dB
		2080,0 ... 2400,0 MHz	24,0	29,0	—	dB
		2400,0 ... 4500,0 MHz	30,0	32,0	—	dB
		4500,0 ... 6000,0 MHz	22,0	25,0	—	dB



Transfer function of filter 2 (narrow band)

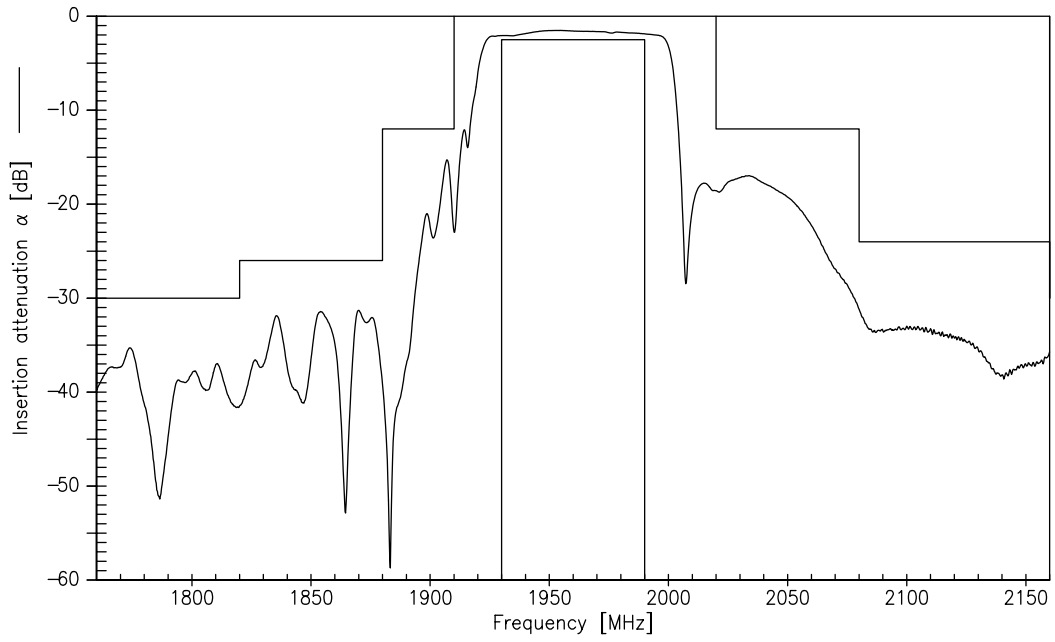

Transfer function of filter 2 (wide band)

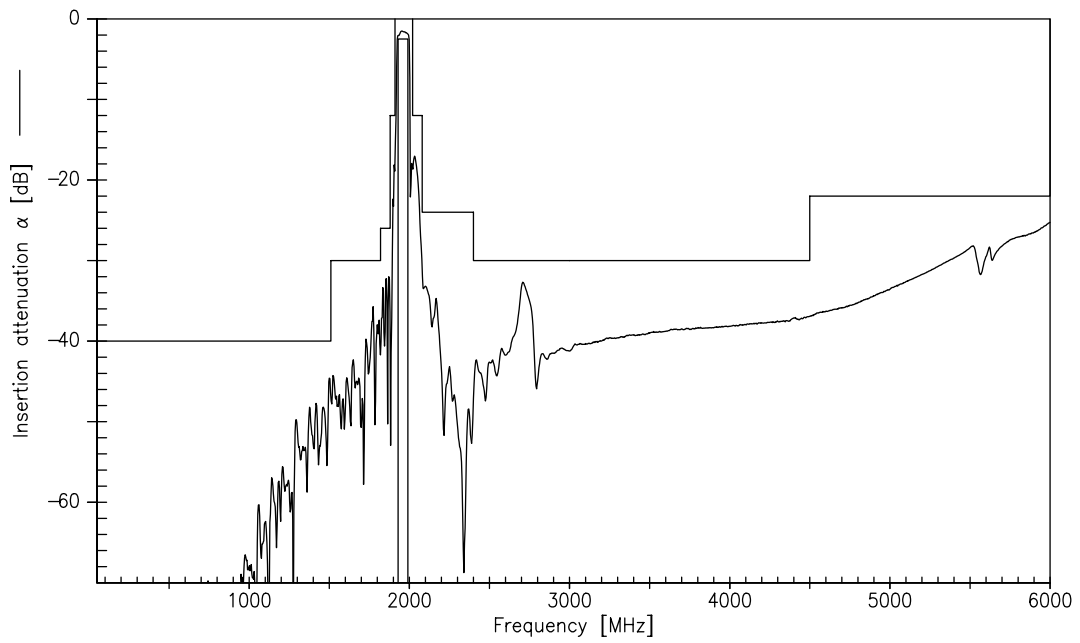



SAW Components

B4234

Low-Loss Dual Band Filter for Mobile Communication

881,5/1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW COM WT PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.