




HD44H11

NPN EPITAXIAL PLANAR TRANSISTOR

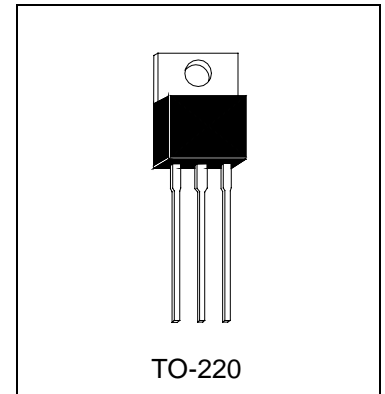

Description

The HD44H11 is designed for various specific and general purpose applications, such as: output and driver stages of amplifiers operating at frequencies from DC to greater than 1MHz; series, shunt and switching regulators; low and high frequency inverters/converters; and many others.

Absolute Maximum Ratings (Ta=25°C)

- Maximum Temperatures
 - Storage Temperature -55 ~ +150 °C
 - Junction Temperature +150 °C Maximum
- Maximum Power Dissipation
 - Total Power Dissipation (Tc=25°C) 50 W
 - Total Power Dissipation (Ta=25°C) 1.67 W
- Maximum Voltages and Currents
 - BVCBO Collector to Base Voltage 80 V
 - BVCEO Collector to Emitter Voltage 80 V
 - BVEBO Emitter to Base Voltage 5 V
 - IC Collector Current 10 A
 - IB Base Current 5 A






Characteristics (Ta=25°C)

| Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------|------|------|------|------|----------------------------|
| BVCBO | 80 | - | - | V | IC=100mA, IB=0 |
| BVCEO | 80 | - | - | V | IC=100mA, IB=0 |
| BVCES | 80 | - | - | V | IC=1mA, IC=0 |
| BVEBO | 5 | - | - | V | IE=1mA |
| ICES | - | - | 10 | uA | VCE=80V |
| IEBO | - | - | 100 | uA | VEB=5V |
| *VCE(sat) | - | - | 1 | V | IC=8A, IB=0.4A |
| *VBE(sat) | - | - | 1.5 | V | IC=8A, IB=0.8A |
| *hFE1 | 60 | - | - | | IC=2A, VCE=1V |
| *hFE2 | 40 | - | - | | IC=4A, VCE=1V |
| Cob | - | 130 | - | pF | VCB=10V |
| fT | - | 50 | - | MHz | VCE=1V, IC=500mA, f=100MHz |

*Pulse Test: Pulse Width ≤380us, Duty Cycle≤2%




Characteristics Curve

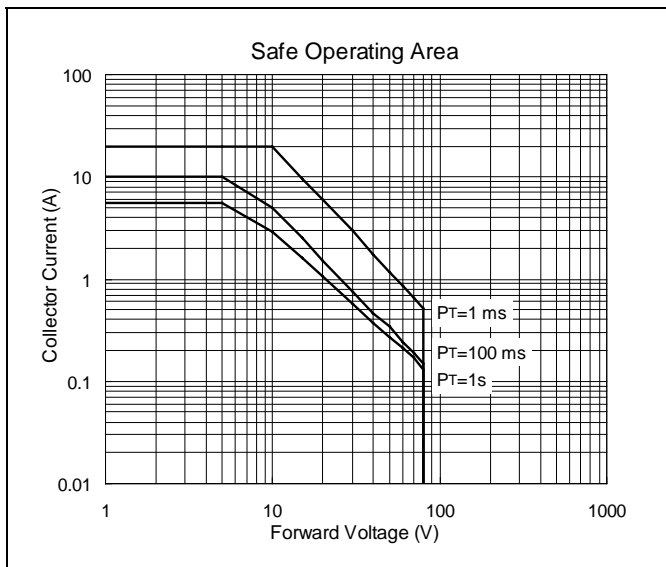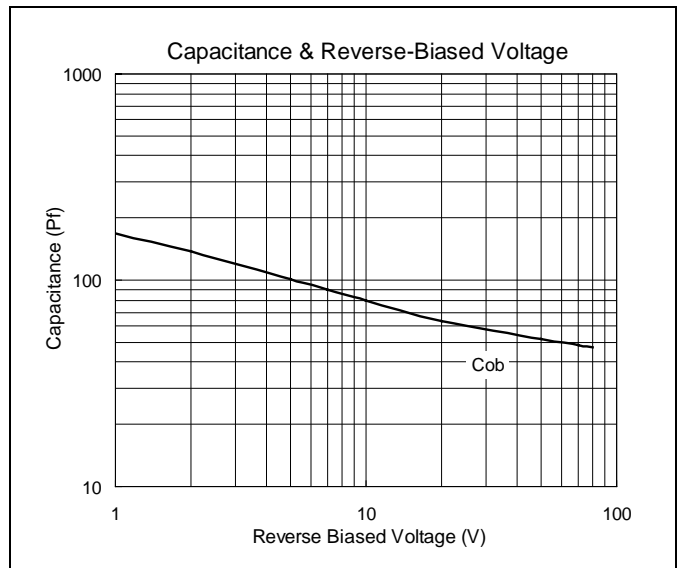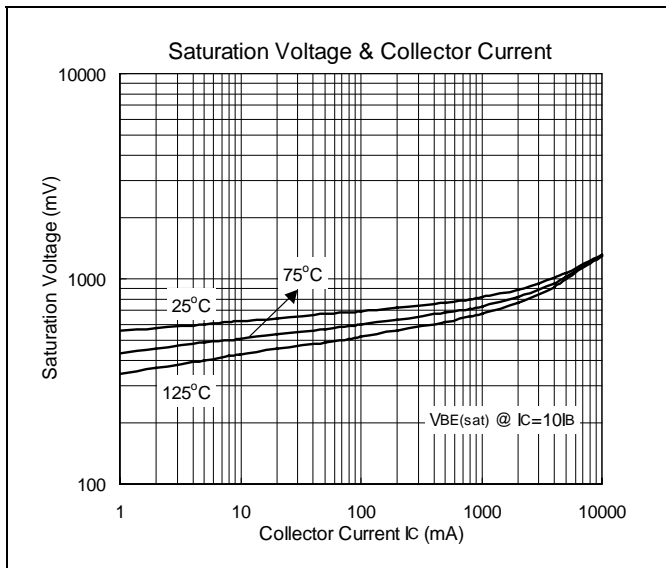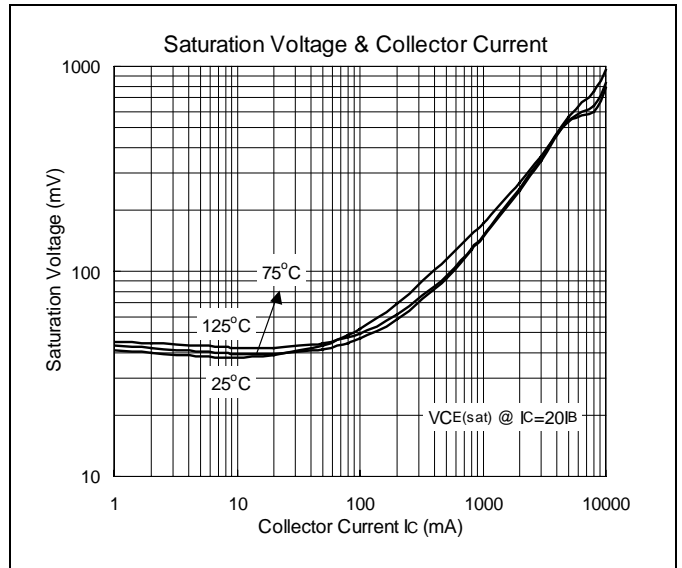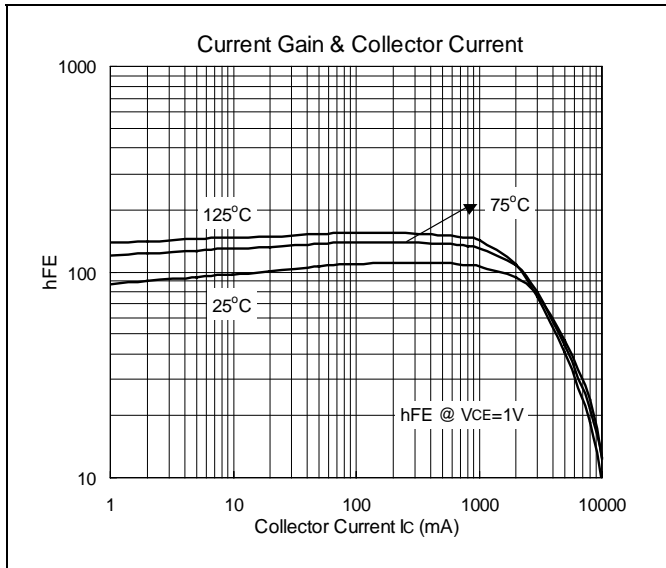



TO-220AB Dimension

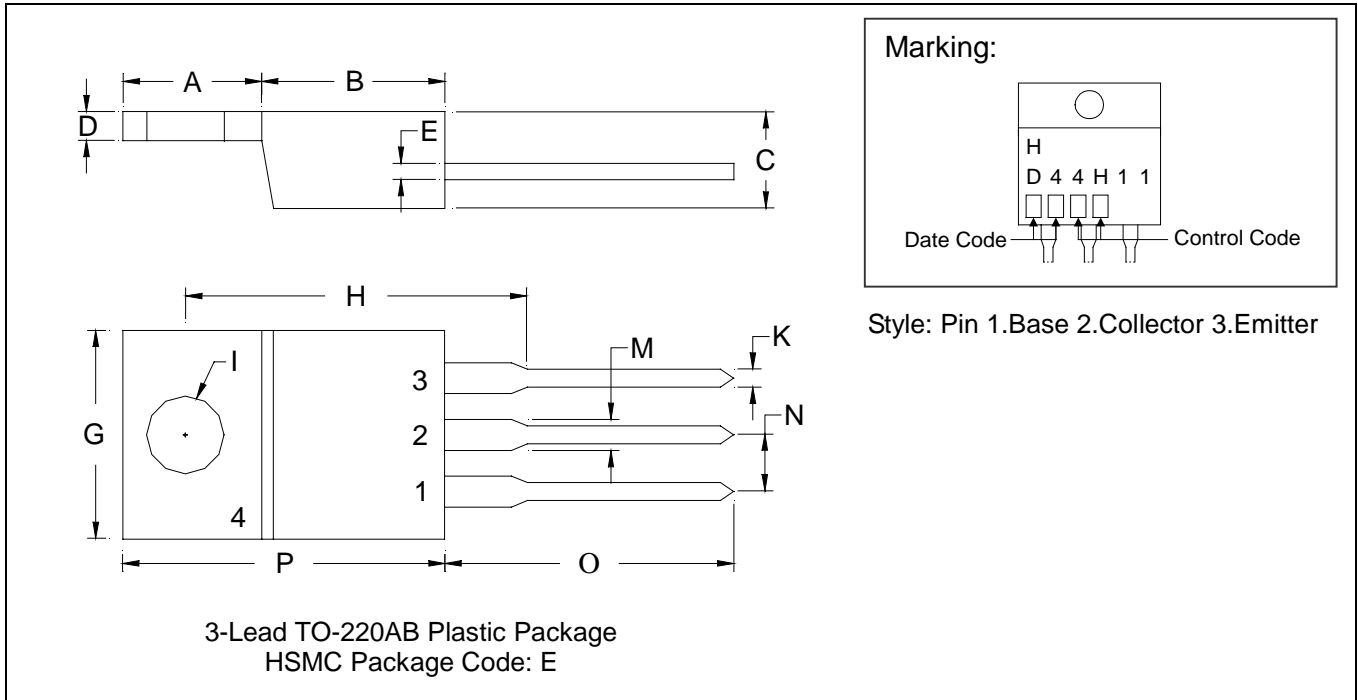

*: Typical

| DIM | Inches | | Millimeters | | DIM | Inches | | Millimeters | |
|-----|--------|---------|-------------|--------|-----|--------|---------|-------------|-------|
| | Min. | Max. | Min. | Max. | | Min. | Max. | Min. | Max. |
| A | 0.2197 | 0.2949 | 5.58 | 7.49 | I | - | *0.1508 | - | *3.83 |
| B | 0.3299 | 0.3504 | 8.38 | 8.90 | K | 0.0295 | 0.0374 | 0.75 | 0.95 |
| C | 0.1732 | 0.185 | 4.40 | 4.70 | M | 0.0449 | 0.0551 | 1.14 | 1.40 |
| D | 0.0453 | 0.0547 | 1.15 | 1.39 | N | - | *0.1000 | - | *2.54 |
| E | 0.0138 | 0.0236 | 0.35 | 0.60 | O | 0.5000 | 0.5618 | 12.70 | 14.27 |
| G | 0.3803 | 0.4047 | 9.66 | 10.28 | P | 0.5701 | 0.6248 | 14.48 | 15.87 |
| H | - | *0.6398 | - | *16.25 | | | | | |

- Notes:
- 1.Dimension and tolerance based on our Spec. dated Sep. 07,1997.
 - 2.Controlling dimension: millimeters.
 - 3.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 - 4.If there is any question with packing specification or packing method, please contact your local HSMC sales office.

Material:

- Lead: 42 Alloy; solder plating
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of HSMC.
- HSMC reserves the right to make changes to its products without notice.
- **HSMC semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- HSMC assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Head Office** (Hi-Sincerity Microelectronics Corp.): 10F.,No. 61, Sec. 2, Chung-Shan N. Rd. Taipei Taiwan R.O.C.
 Tel: 886-2-25212056 Fax: 886-2-25632712, 25368454
- **Factory 1:** No. 38, Kuang Fu S. Rd., Fu-Kou Hsin-Chu Industrial Park Hsin-Chu Taiwan. R.O.C
 Tel: 886-3-5983621~5 Fax: 886-3-5982931