



三合微科技股份有限公司
SAMHOP Microelectronics Corp.

SM7497

3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

SM7497

**3W STEREO AUDIO POWER AMPLIFIER
WITH ADVANCED DC VOLUME CONTROL**

**REV. 0.1
(Preliminary)**

September 11, 2007

**The information in this document is subject to change without notice.
©SAMHOP Microelectronics Corp. All Rights Reserved.**

台北縣新店市民權路100號7樓
7F, No. 100, Min-Chyuan Road, Hsintien, Taipei Hsien, Taiwan, R.O.C.
TEL: 886-2-2218-3978/2820 FAX: 886-2-2218-3320
Email : info@samhop.com.tw

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****GENERAL DESCRIPTION**


The SM7497 is a stereo Class AB audio power amplifier that drives 3 W/channel of continuous RMS power into a 16- Ω load. Advanced dc volume control minimizes external components. TV and monitor benefit from the integrated feature set that minimizes external components without sacrificing functionality.

FEATURES

- * 32-step DC volume control
- * Mute and shutdown mode
- * Short circuit and thermal protection
- * SE and BTL selector
- * 3 W Into 16 - Ω Speakers
- * Input MUX
- * Depop circuitry

APPLICATIONS

- * Small panel LCD TV
- * LCD Monitors
- * Portable DVD
- * Mini speaker
- * Digital broadcast system

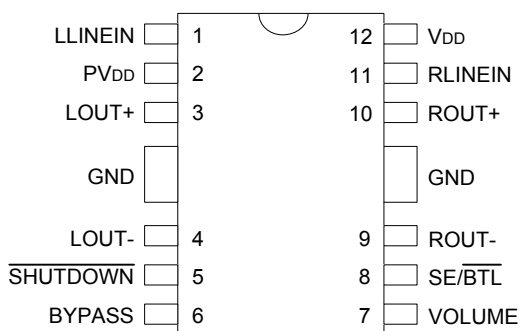PIN ASSIGNMENTS (TOP VIEW)**SM7497 HDIP 12PIN**

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****PIN DESCRIPTIONS**

No.	Pin name	I / O	Function
1	LLINEIN	I	Left channel input signal.
2	PV _{DD}	-	Supply voltage terminal for right power stage.
3	LOUT +	O	Left channel positive audio output.
4	LOUT -	O	Left channel negative audio output.
5	$\overline{\text{SHUTDOWN}}$	I	Places the amplifier in shutdown mode if a TTL logic low is placed on This terminal.
6	BYPASS	I	Tap to voltage divider for internal midsupply bias generator used for analog reference.
7	VOLUME	I	Terminal for DC volume control. DC voltage range is 0V to 5V.
8	SE/ $\overline{\text{BTL}}$	I	Output MUX control. When this terminal is high, SE outputs are selected. When this terminal is low, BTL outputs are selected.
9	ROUT -	O	Right channel negative audio output.
10	ROUT +	O	Right channel positive audio output.
11	RLINEIN	I	Right channel input signal.
12	V _{DD}	-	Supply voltage terminal.
	GND	-	Power ground.

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****MAXIMUM RATINGS** ($T_a = 40 \sim 85^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Supply Voltage	V_{DD}	-0.3 ~ 14.5	V
Input Voltage	V_I	- 0.3 ~ $V_{DD} + 0.3$	V
Operating free-air temperature range	T_A	- 40 ~ 85	$^\circ\text{C}$
Operating junction temperature range	T_J	- 40 ~ 150	$^\circ\text{C}$
Storage temperature range	T_{stg}	- 65 ~ 150	$^\circ\text{C}$
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	-	260	$^\circ\text{C}$

RECOMMENDED OPERATING CONDITION

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Voltage	V_{DD}	--	9.0		13.5	V
High-level input voltage	V_{IH}	$\overline{\text{SHUTDOWN}}$, SE/BTL	4.0		V_{DD}	V
Low-level input voltage	V_{IL}	$\overline{\text{SHUTDOWN}}$, SE/BTL	0		0.8	V
Operating free-air temperature	T_A	--	- 40		85	$^\circ\text{C}$

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****ELECTRICAL CHARACTERISTICS**(V_{DD} = PV_{DD} = 12V, Ta = 25°C unless otherwise noted)

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Supply current	I _{DD}	No load		25	40	mA
Shutdown current	I _{SD}	SHUTDOWN=0V, SE/BTL=0V		1	20	uA
Short to GND current limit	I _{Short}	V _{IN} = 0V, R _L = 900mΩ		1.1		A
Output offset voltage (measured differentially)	V _{OO}	Gain=20dB, SE/BTL=0V			50	mV
High-level input current (SE/BTL,SHUTDOWN,)	I _{IH}	V _I = V _{DD} = PV _{DD}			1	uA
Volume					150	
Low-level input current (SE/BTL,SHUTDOWN,VOLUME,)	I _{IL}	V _I = 0V			1	uA
Bypass voltage (Nominally V _{DD} /2)	V(BYPASS)	Measured at pin 6, No load ⁽¹⁾		6		V

OPERATING CHARACTERISTICS(V_{DD} = PV_{DD} = 12V, R_L = 16Ω, Gain = 6dB, Ta = 25°C unless otherwise noted)

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Power ⁽²⁾	P _O	THD+N=1%, f=1kHz, R _L =16Ω ,BTL mode , Gain=20dB		2.7		W
		THD+N=10%, f=1kHz, R _L =16Ω ,BTL mode , Gain=20dB		3.2		
		THD+N=1%, f=1kHz, R _L =8Ω ,SE mode , Gain=14dB		1.4		
		THD+N=10%, f=1kHz, R _L =8Ω ,SE mode , Gain=14dB		1.7		
High-level output voltage	V _{OH}	Measured between output and V _{DD}			600	mV
Low-level output voltage	V _{OL}	Measured between output and GND			400	mV
Supply current, max Power into a 16 Ω load	I _{DD}	Output current P _O =3W, Stereo repetitive peak			1.5	ARMS
Total harmonic distortion+noise	THD + N	P _O =1W, f=1KHz, f=20Hz to 30kHz BTL Mode		0.1		%
Maximum output power bandwidth	B _{OM}	THD=5%		> 20		kHz
Noise output voltage ⁽³⁾		Gain = 0dB, C(BYP)=1.0 uf		36		μVRMS

(1) At 9.0V < V_{DD} < 13.5V the DC bypass voltage is approximately V_{DD}/2

(2) Output power is measured at the output terminals of the IC.

(3) Noise voltage is measured in a bandwidth of 22Hz to 22KHz.

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****Table 1. DC Volume Control** ($V_{DD} = 12V$, No Load, Volme pin = 5V)

Voltage on volume pin (V _{bc})	Speaker volume (dB)	Headphone volume (dB)
0 ~ 0.65	-65	-70
0.65 ~ 0.79	-39.5	-45.4
0.79 ~ 0.91	-37.6	-43.6
0.91 ~ 1.05	-35.6	-41.6
1.05 ~ 1.18	-33.5	-39.5
1.18 ~ 1.30	-31.7	-37.7
1.30 ~ 1.44	-29.6	-35.7
1.44 ~ 1.56	-27.7	-33.7
1.56 ~ 1.70	-25.9	-32.0
1.70 ~ 1.82	-23.8	-29.8
1.82 ~ 1.96	-22.1	-28.1
1.96 ~ 2.08	-20.0	-26.0
2.08 ~ 2.21	-18.0	-24.1
2.21 ~ 2.35	-15.9	-21.9
2.35 ~ 2.47	-13.9	-20.0
2.47 ~ 2.59	-12.0	-18.1
2.59 ~ 2.73	-10.0	-16.0
2.73 ~ 2.85	-7.97	-14.0
2.85 ~ 2.99	-5.97	-12.0
2.99 ~ 3.12	-4.00	-10.0
3.12 ~ 3.24	-2.01	-8.04
3.24 ~ 3.38	0.01	-6.01
3.38 ~ 3.50	1.98	-4.05
3.50 ~ 3.64	3.96	-2.07
3.64 ~ 3.76	5.97	0.05
3.76 ~ 3.89	7.98	1.96
3.89 ~ 4.02	9.96	3.95
4.02 ~ 4.15	12.0	5.95
4.15 ~ 4.29	13.9	7.93
4.29 ~ 4.41	15.9	9.92
4.41 ~ 4.53	18.0	11.9
4.53 ~ 5.00	19.9	13.9



3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

APPLICATION INFORMATION

Application circuit using the SM7497 in an LCD monitor with 16Ω speaker outputs and volume control

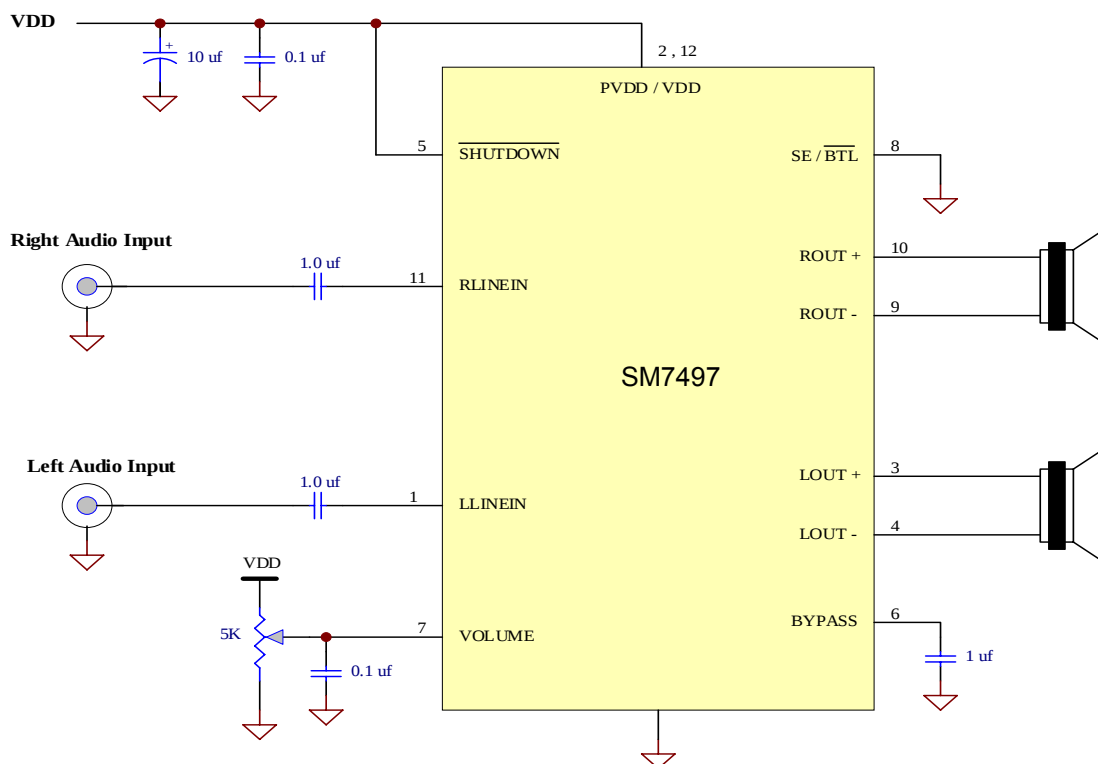


Figure 1. Typical Bridge-Tied-Load(BTL) audio amplifier application circuit for an LCD monitor



3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

APPLICATION INFORMATION

Application circuit using the SM7497 in an LCD monitor with 8Ω speaker outputs and volume control









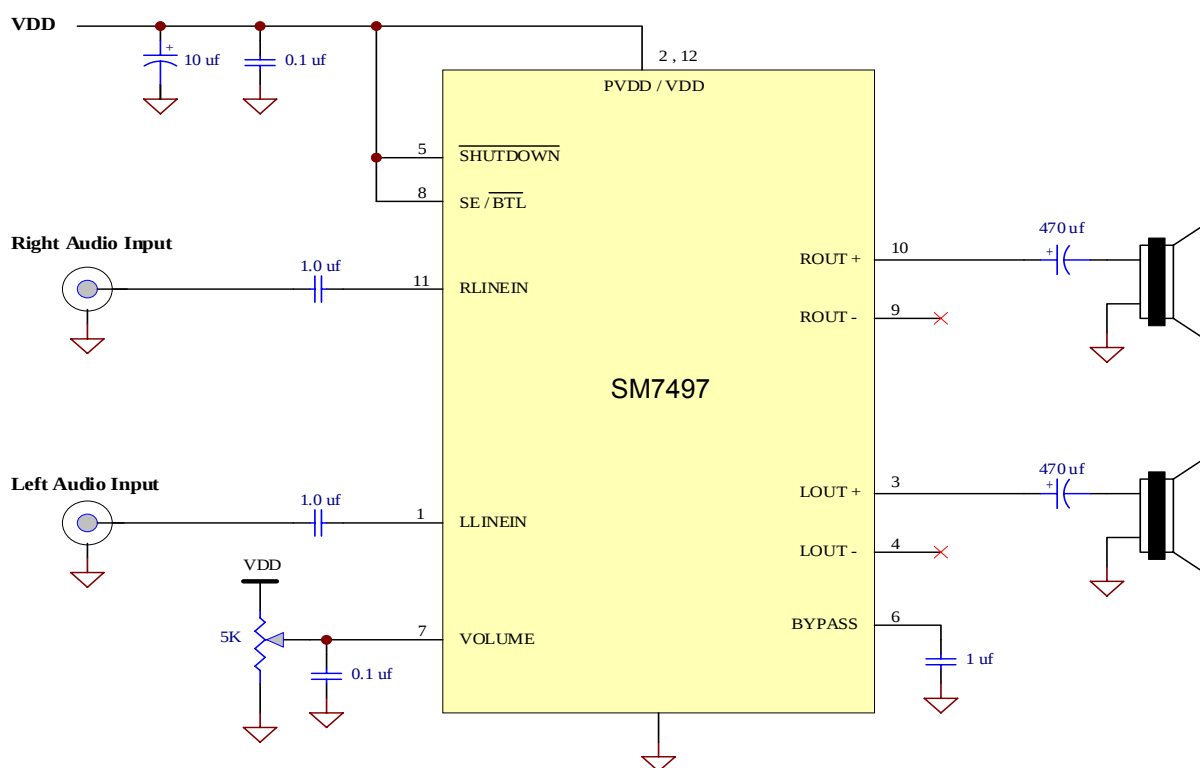


Figure2. Typical Single-Ended (SE) audio amplifier application circuit for an LCD monitor

**3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL****Figure 3****Figure 4****Figure 5****Figure 6**

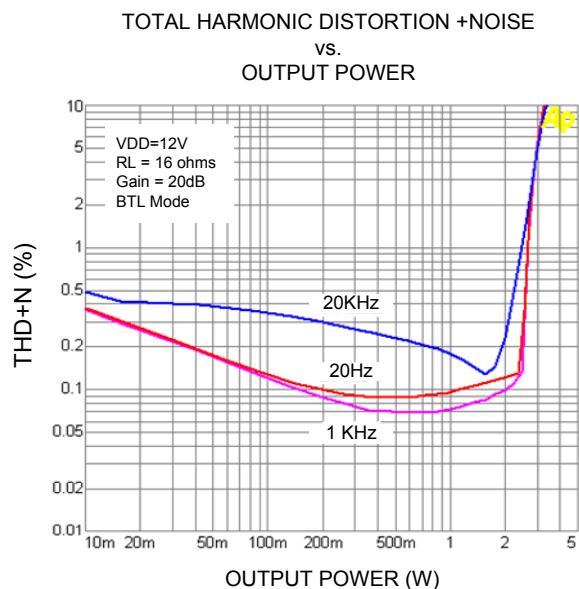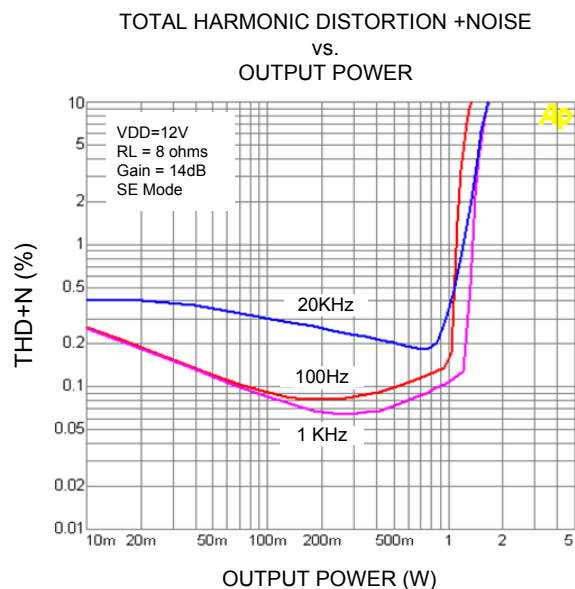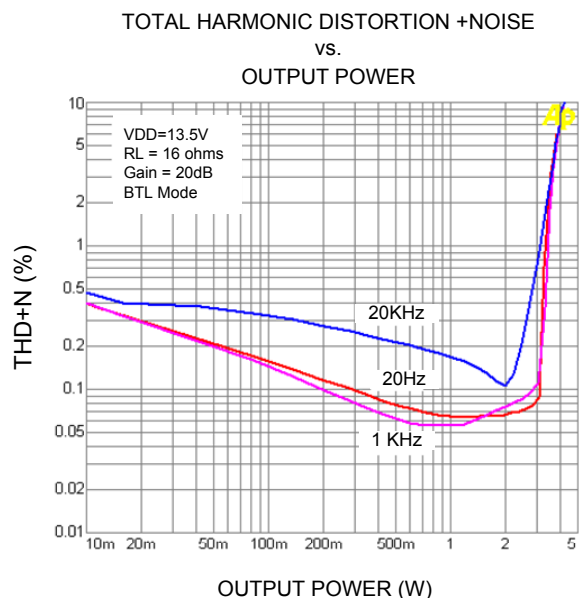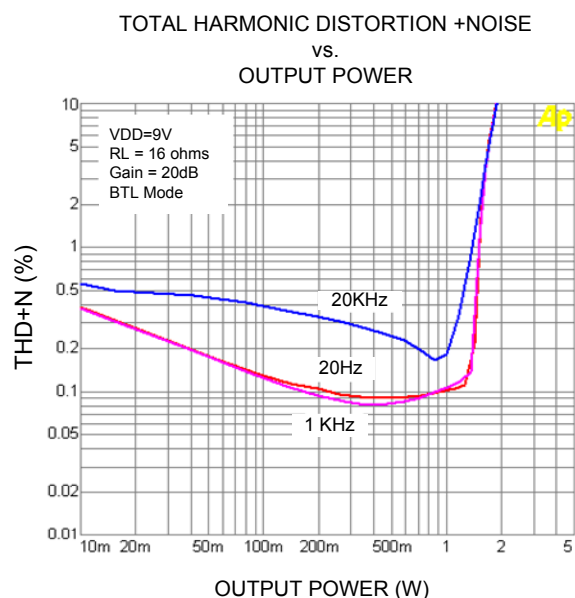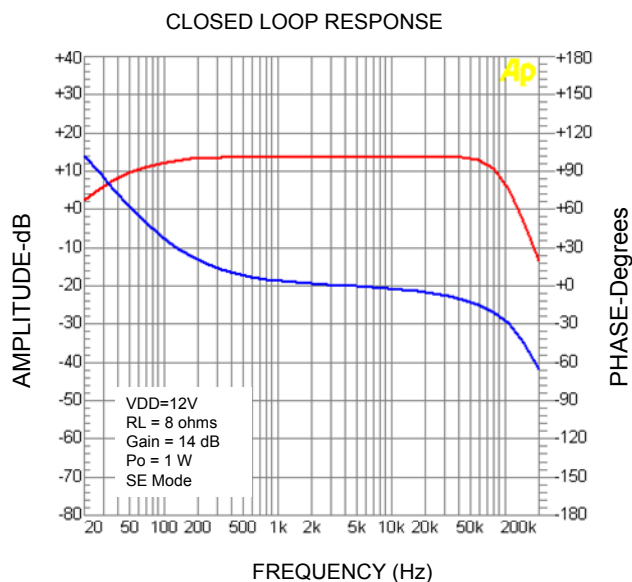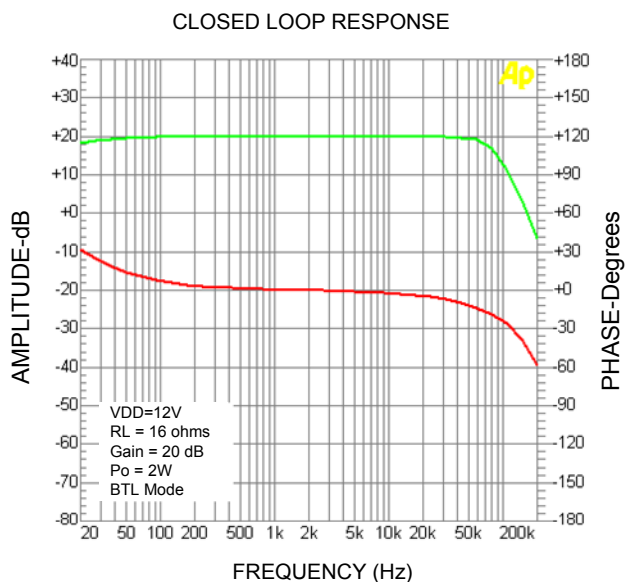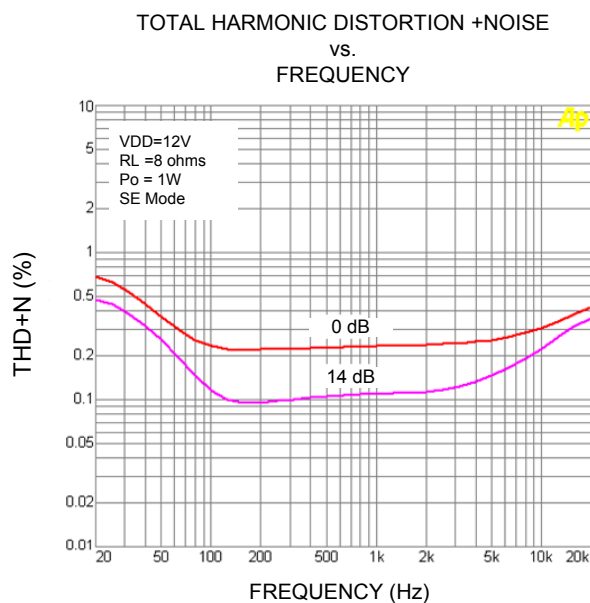

3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

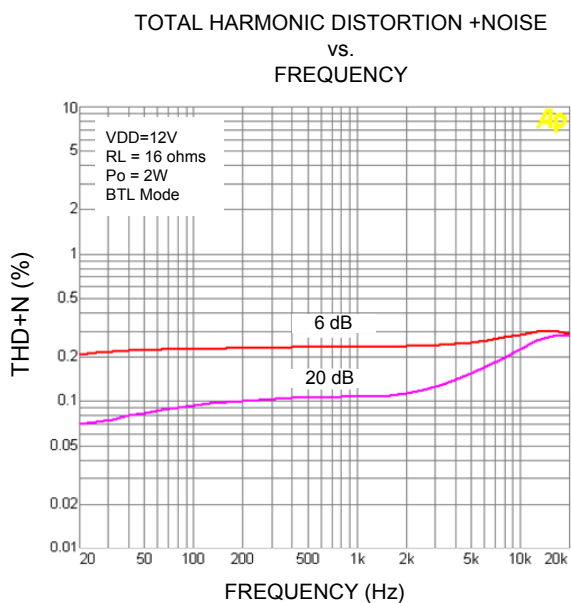



3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

CROSSTALK vs.FREQUENCY

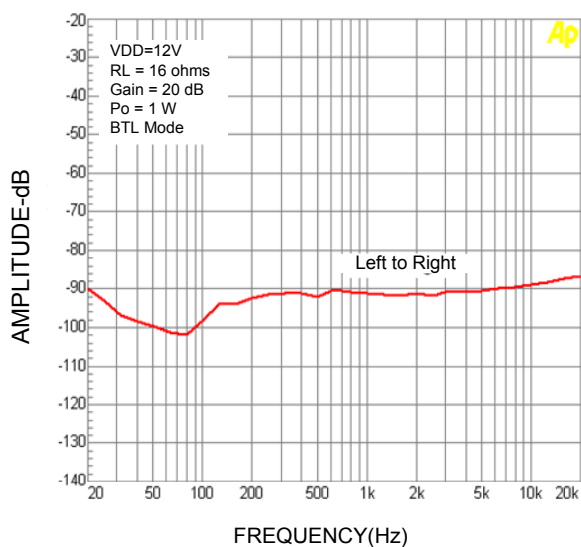


Figure 11

OUTPUT NOISE VOLTAGE vs.FREQUENCY

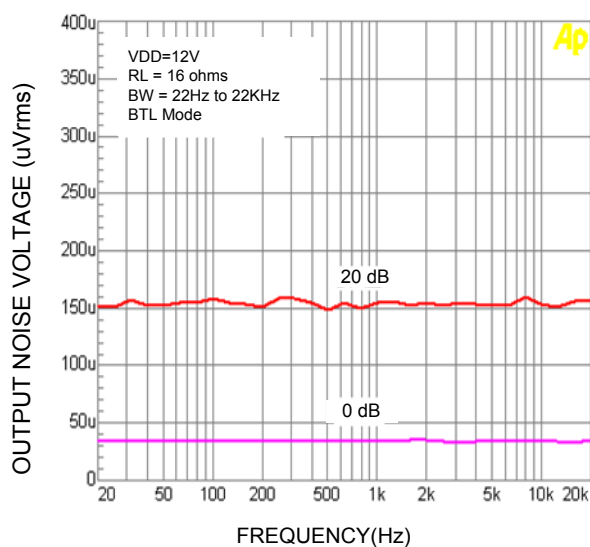


Figure 12







3W STEREO AUDIO POWER AMPLIFIER WITH ADVANCED DC VOLUME CONTROL

PACKAGE OUTLINE

SM7497 12 PIN HDIP

Unit : mm

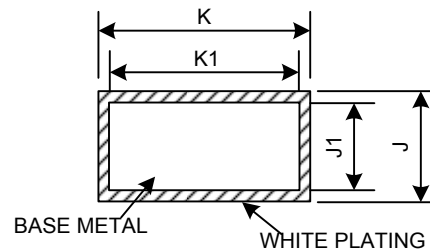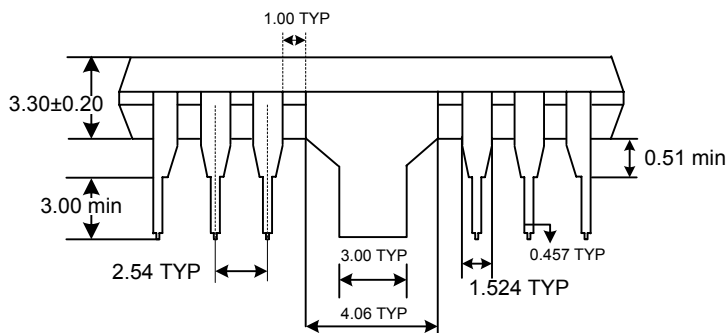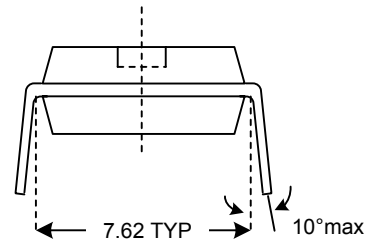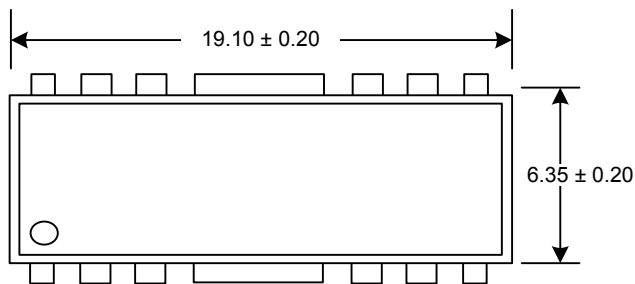

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
J	0.219	0.339	0.0086	0.0133
J1	0.219	0.289	0.0086	0.0114
K	0.460	0.560	0.0181	0.0220
K1	0.460	0.510	0.0181	0.0201