


NPN Transistor

KC846A,B/KC847A,B,C/KC848A,B,C (BC846A,B/BC847A,B,C/BC848A,B,C)

■ Features

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

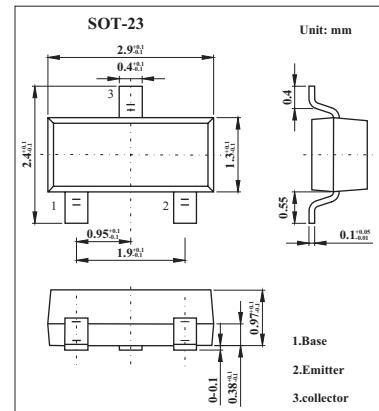

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	KC846	80	V
	KC847	50	
	KC848	30	
Collector-Emitter Voltage	KC846	65	V
	KC847	45	
	KC848	30	
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current -Continuous	I _C	0.1	A
Collector Power Dissipation	P _C	200	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{stg}	-65 to +150	°C

KC846A,B/KC847A,B,C/KC848A,B,C
(BC846A,B/BC847A,B,C/BC848A,B,C)

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{CBO}	$I_c = 10 \mu A, I_E = 0$	80			V
KC846			50			
KC847			30			
Collector-emitter breakdown voltage	V _{CBO}	$I_c = 10mA, I_B = 0$	65			V
KC846			45			
KC847			30			
Emitter-base Breakdown voltage	V _{EBO}	$I_E = 10 \mu A, I_c = 0$	6			V
Collector-base cutoff current	I _{CBO}	V _{CB} = 70 V, $I_E = 0$				μA
KC846		V _{CB} = 50 V, $I_E = 0$				
KC847		V _{CB} = 30 V, $I_E = 0$				
Collector-emitter cutoff current	I _{CEO}	V _{CE} = 70V, $I_B = 0$				μA
KC846		V _{CE} = 50V, $I_B = 0$				
KC847		V _{CE} = 30V, $I_B = 0$				
Emitter-base cutoff current	I _{EBO}	V _{EB} = 5 V, $I_c = 0$			0.1	μA
DC current gain	h _{FE}	V _{CE} = 5 V, $I_c = 2 mA$	110		220	
KC846A,847A,848A			200		450	
KC846B,847B,848B			420		800	
KC847C,848C						
Collector-emitter saturation voltage	V _{CE(sat)}	$I_c = 100 mA, I_B = 5mA$			0.5	V
Base-emitter saturation voltage	V _{BE(sat)}	$I_c = 100 mA, I_B = 5mA$			1.1	V
Collector output capacitance	C _{ob}	V _{CB} =10V,f=1MHz			4.5	pF
Transition frequency	f _T	V _{CE} = 5 V, $I_c = 10 mA, f = 100 MHz$	100			MHz

■ Marking

NO.	KC846A	KC846B
Marking	1A	1B

NO.	KC847A	KC847B	KC847C
Marking	1E	1F	1G

NO.	KC848A	KC848B	KC848C
Marking	1J	1K	1L

KC846A,B/KC847A,B,C/KC848A,B,C (BC846A,B/BC847A,B,C/BC848A,B,C)

■ Typical Characteristics

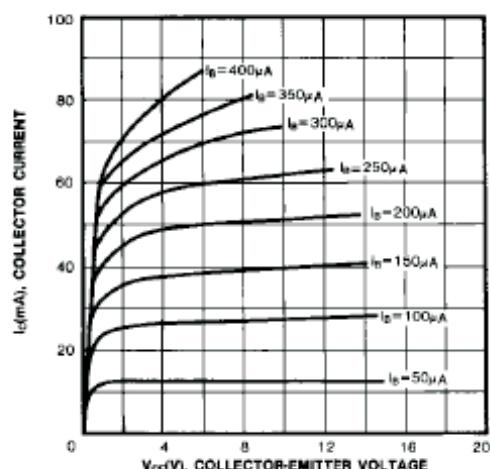


Fig.1 Static Characteristic

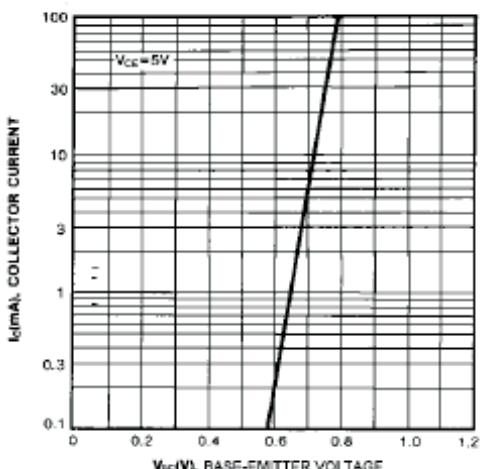


Fig.2 Transfer Characteristic

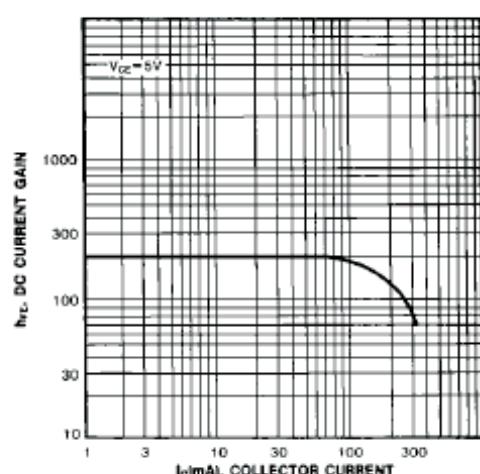


Fig.3 DC Current Gain

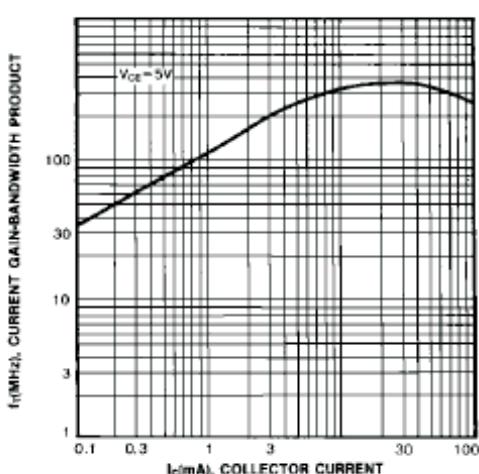


Fig.4 Current Gain Bandwidth Product

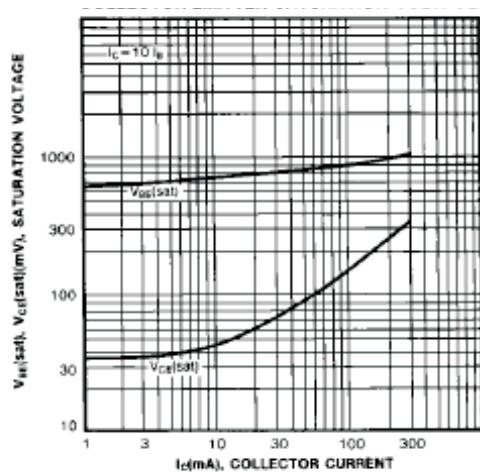


Fig.5 Base Emitter Saturation Voltage

Collector Emitter Saturation Voltage

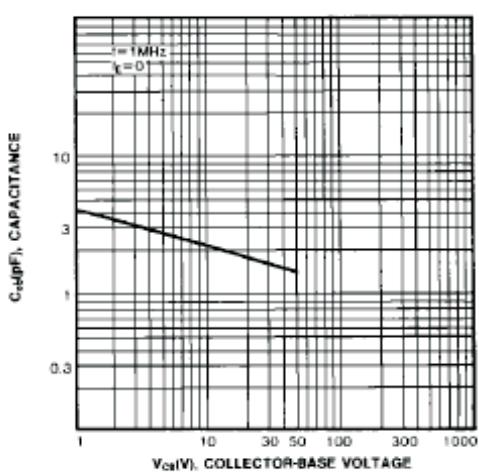


Fig.6 Output Capacitance