

M30100T-PTC

Converter for Connecting 32-pin 0.8mm-pitch QFP for M30100T-PRB
(for M16C/10 Group M30100)

Function

The M30100T-PTC is a converter board for M30100 Group for connecting the pod probe M30100T-PRB to the footpattern for 0.8-mm-pitch QFP (32P6U-A).

Attaching Procedure



When debugging

- (1) Mount NQPACK032SA on the foot pattern on the target system.
- (2) On the top of (1), mount YQPACK032SA.
- (3) Screw down the YQPACK032SA with YQ-GUIDE's.
- (4) Connect the YQPACK032SA and M30100T-PTC.
- (5) Connect the pod probe M30100T-PRB to the upper connector of M30100T-PTC for use.

During board-mounted evaluation

Mount the M30100 MCU and the HQPACK032SA (separately available) in that order on the NQPACK032SA on the target system.

External View and Dimensions

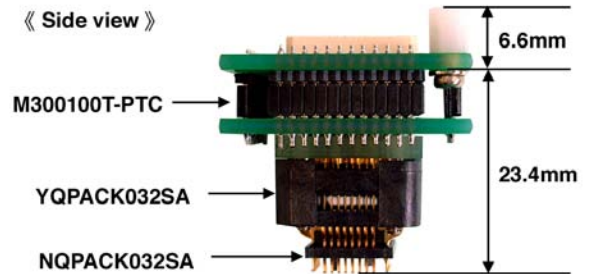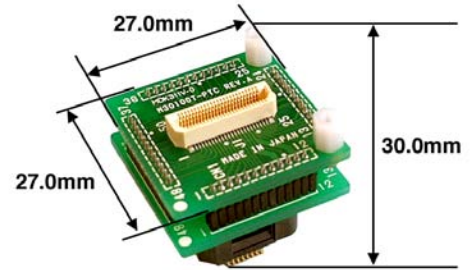


Package Components


- M30100T-PTC converter
- YQPACK032SA (made by Tokyo Eletech Co., Ltd.)
- NQPACK032SA (made by Tokyo Eletech Co., Ltd.)
- YQ-GUIDE (× 4)
- Phillips screw driver (made by Tokyo Eletech Co., Ltd.)
- User's manual

*Required components to connect to the target system are included with this product package. Each component made by Tokyo Eletech Co., Ltd. is optionally available alone from Tokyo Eletech Co., Ltd. See Appendix G "Contact Addresses for Partner Products".

Recommended Foot Pattern (Unit: mm)

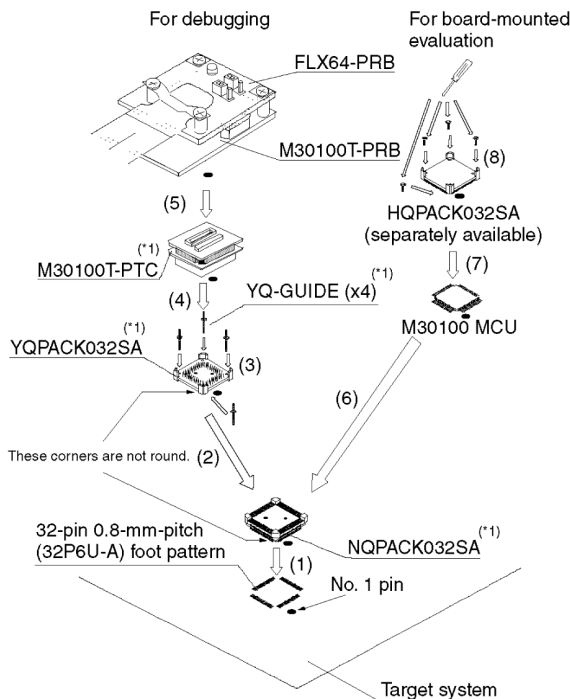

*: These 4 products are available in one package.

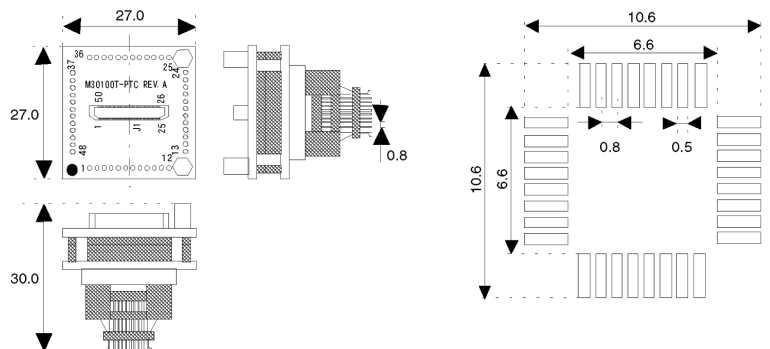

[Ordering Information] See Appendix H "Ordering Information".