


MTD2006

Dual full-bridge for a bipolar motor

Features


- Dual full-bridge for a bipolar stepper motor
- Constant current control (fixed frequency PWM control)
- Current decay selection (correspond to microstepping drive)
- Noise cancellation function (no need external RC)
- Integrated flywheel and flyback diodes
- Cross conduction protection
- Overheating alarm function
- Low thermal resistance ZIP package (ZIP27)

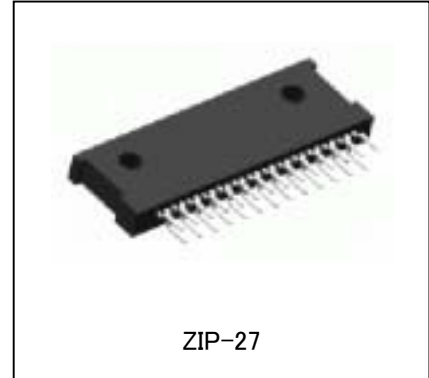

Absolute maximum ratings / Ta=25°C

| Parameter | Symbol | Rating | Unit |
|----------------------------|--------------------|----------------------|------|
| Outout voltage | V _{mm} | 35 | V |
| Outout current | I _{OUT} | 1.3 | A |
| Logic supply | V _{CC} | 6 | V |
| Logic input voltage | V _{LOGIC} | 0 to V _{CC} | V |
| Power dissipation | P _T | 5 | W |
| Strage temperature range | T _{stg} | -40 to 150 | °C |
| Junction temperature range | T _j | 150 | °C |

Pin assignment

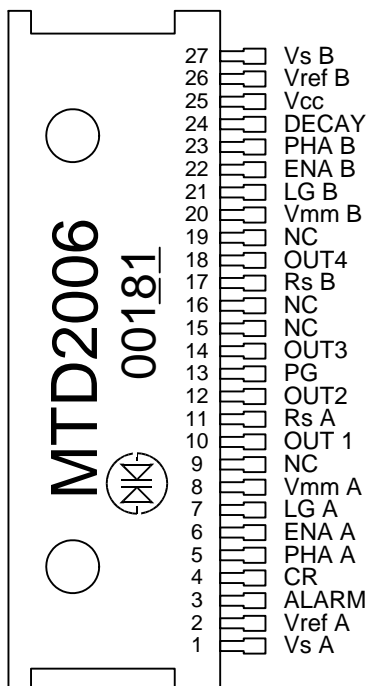

Truth table

| ENA A or B | PHA A or B | OUT 1 or 4 | OUT 2 or 3 |
|------------|------------|------------|------------|
| L | L | L | H |
| L | H | H | L |
| H | * | OFF | OFF |

*:don't care

| DECAY | Output chopping |
|-------|----------------------|
| L | Sink+Source chopping |
| H | Source chopping |

■ Electrical characteristics


Ta=25°C, Vcc=5V unless otherwise specified

| Parameter | Symbol | Condition | MIN | TYP | MAX | Unit |
|-----------------------------------|-----------------------|--|-------|------|-----------------|------|
| Output stage | | | | | | |
| Load supply | V _{mm} | | - | - | 31 | V |
| Load supply current | I _{MM(OFF)} | V _{mm} =35V, V _{ENA} =5V | - | - | 8 | mA |
| Upper transistor saturation drop | V _{CE(sat)H} | I _C =0.8A | - | 1.0 | 1.4 | V |
| Lower transistor saturation drop | V _{CE(sat)L} | I _C =0.8A | - | 1.0 | 1.4 | V |
| Transistor leak current | I _R | V _{mm} =V _{CEO(SUS)} | - | - | 10 | μA |
| Upper diode forward drop | V _{FH} | I _F =0.8A | - | 1.3 | 1.6 | V |
| Lower diode forward drop | V _{FL} | I _F =0.8A | - | 1.3 | 1.5 | V |
| Logic stage | | | | | | |
| Logic supply | V _{CC} | | 4.75 | - | 5.25 | V |
| Logic supply current (output ON) | I _{CC(ON)} | V _{ENA} =0V | - | 25 | 33 | mA |
| Logic supply current (output OFF) | I _{CC(OFF)} | V _{ENA} =5V | - | 19 | 26 | mA |
| PHA "H" input voltage | V _{PHA} H | | 2.3 | - | V _{CC} | V |
| PHA "L" input voltage | V _{PHA} L | | GND | - | 0.8 | V |
| PHA "H" input current | I _{PHA} H | V _{PHA} =5V | - | - | 10 | μA |
| PHA "L" input current | I _{PHA} L | V _{PHA} =0V | - | -100 | -150 | μA |
| ENA "H" input voltage | V _{ENA} H | | 2.3 | - | V _{CC} | V |
| ENA "L" input voltage | V _{ENA} L | | GND | - | 0.8 | V |
| ENA "H" input current | I _{ENA} H | V _{ENA} =5V | - | - | 10 | μA |
| ENA "L" input current | I _{ENA} L | V _{ENA} =0V | - | -100 | -150 | μA |
| DECAY "H" input voltage | V _{DEC} H | | 2.3 | - | V _{CC} | V |
| DECAY "L" input voltage | V _{DEC} L | | GND | - | 0.8 | V |
| DECAY "H" input current | I _{DEC} H | V _{DEC} =5V | - | - | 10 | μA |
| DECAY "L" input current | I _{DEC} L | V _{DEC} =0V | - | -100 | -150 | μA |
| Vref input current | I _{ref} | V _{ref} =0V | - | -1 | -10 | μA |
| Vs input current | I _{SENSE} | V _s =0V | - | -1 | -10 | μA |
| Comparator threshold | V _s | V _{ref} =0.5V | 0.475 | 0.5 | 0.525 | V |
| Chopping frequency | f _{CHOP} | C _t =3300pF, R _t =20kΩ | - | 20 | - | kHz |
| Blanking time | t _b | C _t =3300pF, R _t =20kΩ | - | 1.35 | - | μs |
| Vs maximum voltage | V _{s(max)} | | - | - | 1.0 | V |
| ALARM leak current | I _{R(ALM)} | V _{ALM} =5V | - | - | 10 | μA |
| ALARM input current | I _{ALM} | V _{ALM} =0.5V | - | - | 2 | mA |
| ALARM operation temperature | T _{ALM} | V _{CC} =5.1V ±5% | 110 | 135 | - | °C |

■ Thermal resistance

| Symbol | Rating | Unit |
|-----------------|--------|------|
| θ _{ja} | 25 | °C/W |

Internal equation circuits / Typical application

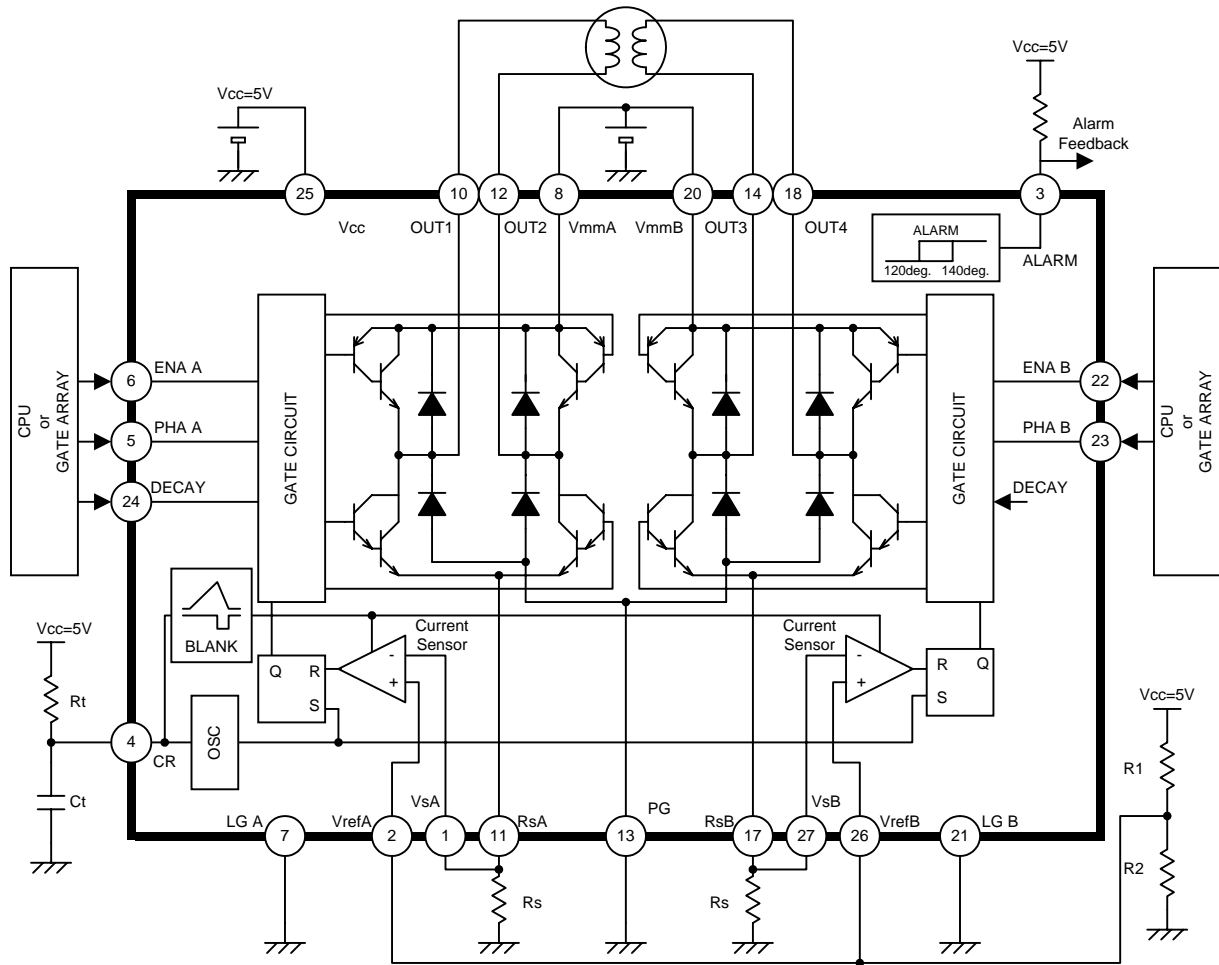

Constant chopping current level

$$I_o = \frac{V_{ref}}{R_s}$$


Chopping frequency

$$f = \frac{1}{0.75 \cdot C_t \cdot R_t}$$

Recommended component values

| Symbol | Value | Unit |
|--------------------------------|--------------|------|
| R _t | 7.5 to 30 | kΩ |
| C _t | 2200 to 4700 | pF |
| R ₁ +R ₂ | ≤ 10 | kΩ |

Outline dimensions

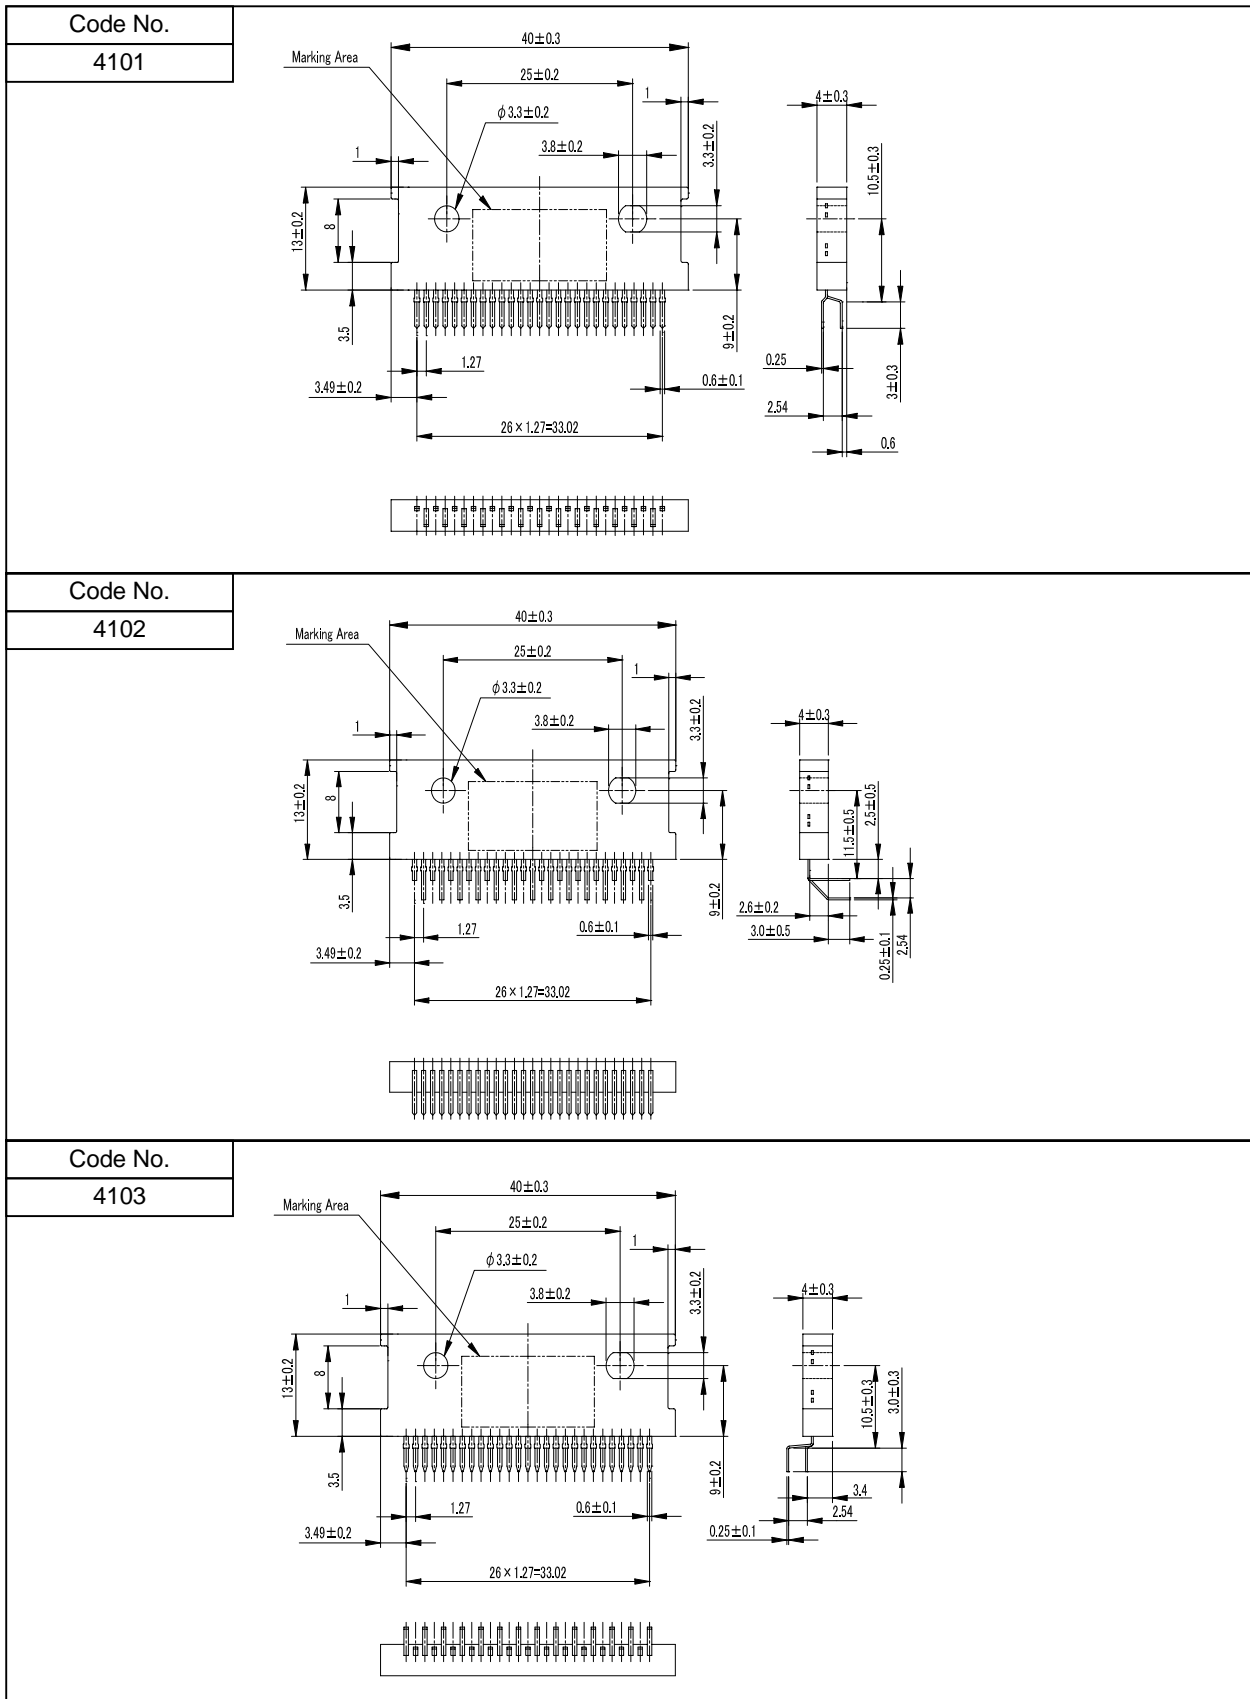

(Unit : mm)

■ This device fully meets the reliability and quality control standards described in our company's catalog. If this device is to be used in a situation where its misuse or failure might cause serious injury or death, consult with our company. Reliability and quality control standards for this device are considered adequate when it is used with the following type of end equipment.

Standard applications

Computers, OA and other office equipment, Communication terminal, Measurement machine tools, Audio-visual, Game and other amusements, Household electric appliances, Personal items, Industrial robot, etc.

Special applications where the device may or not be suitable include the following.

Transportation and conveyance (cargo loading) equipment, Primary communications equipment, Traffic signal control equipment, Fire and burglary alarms, Various safety devices, Medical equipment, etc.

Other special applications where the device reliability is not considered high enough include the following.

Atomic power control systems, Aviation equipment, Aerospace equipment, Submarine relay equipment, Life support equipment, etc.

■ Our company makes a constant effort to improve the quality and reliability of our products. However, it is the customer's responsibility to provide safety. Take the appropriate steps to prevent personal injury, fire, and damage by providing redundancy equipment, fire containment equipment, and devices to protect personnel and equipment from operational mistakes.

If you want to any more detail information and design application, please contact sales office regarding any questions you may have.

SHINDENGEN ELECTRIC MFG. CO., LTD. reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the design of its products.

The information included herein is believed to be accurate and reliable. However, SHINDENGEN ELECTRIC MFG. CO., LTD. assumes no responsibility for its use; nor for any infringements of patents or other rights of third parties, which may result from its use.