

CAR1612FP series rectifier

Input: 85Vac to 264Vac; Output: 12Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A



Applications

- 12Vdc distributed power architectures
- Datacom applications
- Mid to high-end Servers
- Enterprise Networking
- Network Attached Storage
- Telecom Access Nodes
- Routers/Switches
- Broadband Switches
- ATE Equipment

Description

The CAR1612FP series of Front-End rectifiers provide highly efficient isolated power from worldwide input mains in a compact 1U industry standard form factor in an unprecedented power density of 19W/in³. These rectifiers are ideal for datacom applications such as enterprise networking, mid to high-end servers, and storage equipment, where mid to light load efficiency is of key importance given the nature of the power consumption of the end application.

The high-density, front-to-back airflow is designed for minimal space utilization and is highly expandable for future growth. The industry standard PMBus compliant I²C communications bus offers a full range of control and monitoring capabilities. The SMBAlert signal pin alerts customers automatically of any state change within the power supply.

Features

- Universal input with PFC
- Constant power characteristic
- 2 front panel LED 1-input LED 2-[output, fault, over temp]
- Remote ON/OFF control of the 12Vdc output
- Remote sense on the 12Vdc output
- No minimum load requirements
- Redundant parallel operation
- Active load sharing (single wire)
- Hot Pluggable
- Efficiency: typically 94.5% @ 50% load
- Standby orderable either as 3.3Vdc or 5Vdc
- Auto recoverable OC & OT protection
- Digital status & control: I²C and PMBus serial bus
- EN/IEC/UL60950-1 2nd edition; UL, CSA and VDE
- EMI: class B FCC docket 20780 part 15, EN55022
- Meets EN6100 immunity and transient standards
- Shock & vibration: NEBS GR-63-CORE, level 3

CAR1612FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

Parameter	Device	Symbol	Min	Max	Unit
Input Voltage: Continuous	All	V _{IN}	0	264	V _{ac}
Operating Ambient Temperature	All	TA	-10	60 ¹	°C
Storage Temperature	All	Tstg	-40	85	°C
I/O Isolation voltage to Frame (100% factory Hi-Pot tested)	All			1500	V _{ac}

Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, load, and temperature conditions.

INPUT						
Parameter	Device	Symbol	Min	Typ	Max	Unit
Operational Range	All	V _{IN}	85	110/230	264	V _{ac}
Frequency Range (ETSI 300-132-1 recommendation)	All	F _{IN}	47	50/60	63	Hz
Main Output Turn_OFF	All	V _{IN}			80	V _{ac}
Maximum Input Current (V _O = V _{O, set} , I _O =I _{O, max})	All	I _{IN}			14.3 10.5	A _{ac}
Cold Start Inrush Current (Excluding x-caps, 25°C, <10ms, per ETSI 300-132)	All	I _{IN}			40	A _{peak}
Efficiency (T _{amb} =25°C, V _{out} = 12Vdc, I _O =I _{O, max})	All	η		92.5 / 89 94.5 / 91 92.4 / 88		%
Power Factor (V _{in} =230Vac, I _O =I _{O, max})	All	PF		0.99		
Holdup time ² (V _{out} = 12V _{dc} , T _{amb} 25°C, I _O =I _{O, max})	All	T		12 15		ms
Early warning prior to loss of DC output below regulation	All		2			ms
Ride through	All	T		10		ms
Leakage Current (V _{in} = 250Vac, F _{in} = 60Hz)	All	I _{IN}		3		mArms
Isolation						
Input/Output	All		3000			V _{ac}
Input/Frame	All		1500			V _{ac}
Output/Frame	All		100			V _{dc}

12V _{dc} MAIN OUTPUT						
Parameter	Device	Symbol	Min	Typ	Max	Unit
Output Power						
High Line Operation	All	W	0	-	1600	W
Low Line Operation	All	W	0	-	1200	W
Set point	All		11.9	12.00	12.1	V _{dc}
Overall regulation (load, temperature, aging)	All		-3		+3	%
Ripple and noise ³	All	V _{out}			120	mV _{p-p}
Turn-ON overshoot	All				+3	%
Turn-ON delay	All	T			2	sec

¹ Derated above 50°C at 2.5%/°C

² 12V output can decay down to 10.8V

³ Measured across a 10µf tantalum and a 0.1µf ceramic capacitors in parallel. 20MHz bandwidth

CAR1612FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A

12V _{dc} MAIN OUTPUT (continued)						
Parameter	Device	Symbol	Min	Typ	Max	Unit
Remote ON/OFF delay time	All				40	ms
Turn-ON rise time (10 – 90% of V _{out})					50	ms
Transient response 50% step [10%-60%, 50% - 100%] (di/dt – 1A/μs, recovery 300μs)		V _{out}	-5		+5	%V _{out}
Programmable range (hardware ⁴ & software)			10.8		13.2	V _{dc}
Ovoltage protection, latched (recovery by cycling OFF/ON via hardware or software)			13.8	14.8	15.8	V _{dc}
Output current V _{in} = HL V _{in} = LL		I _{out}	0		134 100	A _{dc}
Current limit, Hiccup (programmable level)			110		130	% of FL
Active current share			-5		+5	% of FL

AUXILIARY OUTPUT						
Parameter	Device	Symbol	Min	Typ	Max	Unit
Set point	All	V _{out}		3.3 / 5.0		V _{dc}
Overall regulation (load, temperature, aging)	All		-5		+5	%
Ripple and noise	All				50	mVp-p
Output current	All	I _{out}	0		1	A _{dc}
Overload protection -			1.1		2.6	A _{dc}
Ovoltage protection						
Isolation Output/Frame	All		100			V _{dc}

Environmental, Reliability					
Parameter	Min	Typ	Max	Units	Notes
Ambient Temperature	-10 ⁵		70 ⁶	°C	Air inlet from sea level to 5,000 feet. 7400 ft 51°C to 70°C. (60°C max where TUV/VDE is required)
Operating			2250	m	
Altitude Operating Power Derating			2.5	%/°C	
Storage	-40		85	°C	30,000 ft
Altitude non-operating			8200	m	
Overload Protection shutdown restart		125 110		°C	
Humidity	30 10		95 95	%	Relative humidity, non-condensing
Operating Storage					
Shock and Vibration acceleration			6	Grms	NEBS GR-63-CORE, Level 3, 20 -2000Hz, minimum 30 minutes
Earthquake Rating	4			Zone	NEBS GR-63-CORE, all floors, Seismic Zone 4 Designed and tested to meet NEBS specifications.
Reliability	25°C 50°C	320,000		Hrs	Full load, MTBF per Bellcore RPP
		100,000		Hrs	Full load, MTBF per Bellcore RPP
		200,000		Hrs	Full load, demonstrated MTBF

⁴ V_{out}=10.8 + (V_{prog} * 0.96) where 0 < V_{prog} < 2.5. Unit stays at 13.2V when 2.5 < V_{prog} < 3. Unit stays at 12V when V_{prog} > 3V or no-connect.

⁵ Designed to start at an ambient down to -40°C; meet spec after ≈ 30 min warm up period, may not meet operational limits below -10°C.

⁶ 60°C max where TUV/VDE is required

EMC				
Parameter	Criteria	Standard	Level	Test
AC input	Conducted emissions	EN55022, FCC Docket 20780 part 15, subpart J EN61000-3-2	A*	0.15 – 30MHz 0 – 2 KHz
	Radiated emissions**	EN55022	A*	30 – 10000MHz
	Voltage dips	EN61000-4-11	B	-30%, 10ms
			B	-60%, 100ms
			B	-100%, 5sec
	Voltage surge	EN61000-4-5	A	4kV, 1.2/50µs, common mode
			A	2kV, 1.2/50µs, differential mode
immunity	Fast transients	EN61000-4-4	B	5/50ns, 2kV (common mode)
Enclosure immunity	Conducted RF fields	EN61000-4-6	A	130dBµV, 0.15-80MHz, 80% AM
	Radiated RF fields	EN61000-4-3	A	10V/m, 80-1000MHz, 80% AM
		ENV 50140	A	
	ESD	EN61000-4-2	B	4kV contact, 8kV air

* Note: Contact the factory for a recommended external EMI filter to meet Class B emissions

** Radiated emissions compliance is contingent upon the final system configuration.

Status and Control

Details of analog controls are provided in this data sheet under Signal Definitions. GE Energy will provide separate application notes on the I2C protocol. Contact your local GE Energy representative for details.

Signal Definitions

All signals and outputs are referenced to Output return. These include 'Vstb return' and 'Signal return'.

Input Signals

Voltage programming (V_{prog}): An analog voltage on this signal can vary the output voltage ± 10% from 10.8Vdc to 13.2Vdc. The equation of this signal is:

$$V_{out} = 10.8 + (V_{prog} * 0.96) \quad 0 < V_{prog} < 2.5$$

If $2.5 < V_{prog} < 3$, the output is 13.2V. If V_{prog} is $> 3V$ or left open the programming signal is ignored and the unit output is set at the setpoint of 12Vdc.

Load share (Ishare): This is a single wire analog signal that is generated and acted upon automatically by power supplies connected in parallel. The Ishare pins should be tied together for power supplies if active current share among the power supplies is desired. No resistors or capacitors should get connected to this pin.

Remote ON/OFF: Controls the presence of the main 12Vdc output voltage. This is an open collector, TTL level control signal. This signal needs to be pulled HI externally through a resistor. Maximum collector voltage is 12Vdc and the maximum sink current is 4mA. A Logic

1 (TTL HI level) turns ON the 12Vdc output, while a Logic 0 (TTL LO level) turns OFF the 12Vdc output.

A turn OFF command either through this signal (Remote ON/OFF) or firmware commanded would turn OFF the 12V output.

Enable: This is a short signal pin that controls the presence of the 12Vdc main output. This pin should be connected to 'output return' on the system side of the output connector. The purpose of this pin is to ensure that the output turns ON after engagement of the power blades and turns OFF prior to disengagement of the power blades.

Write protect (WP): This signal protects the contents of the EEPROM from accidental over writing. When left open the EEPROM is write protected. A LO (TTL compatible) permits writing to the EEPROM. This signal is pulled HI internally by the power supply.

Output signals

Output current monitor (I_{mon}): A voltage level proportional to the delivered output current is present on this pin. $134A = 3V$, $100A = 2.25V$; accuracy: ± 10%.

AC OK: A TTL compatible status signal representing whether the input voltage is within the anticipated range. This signal needs to be pulled HI externally through a resistor. Maximum sink current ≤ 4mA and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that the input voltage is applied within the specified input range.

DC OK: A TTL compatible status signal representing whether the output voltage is present. This signal needs

CAR1612FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A

to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that the output voltage is present.

Over temp warning: A TTL compatible status signal representing whether an over temperature exists. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that temperatures are normal.

If an over temperature should occur, this signal would pull LO for approximately 10 seconds prior to shutting down the power supply. The unit would restart if internal temperatures recover within normal operational levels. At that time the signal reverts back to its open collector (HI) state.

Fault: A TTL compatible status signal representing whether a Fault occurred. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the max voltage is 12Vdc. Open collector (HI) on this signal indicates that no Fault is present.

This signal activates for OTP, OVP, OCP, AC fault or No output.

PS Present: This pin is connected to 'output return' within the power supply. Its intent is to indicate to the system that a power supply is present. This signal may need to be pulled HI externally through a resistor.

Interrupt (SMBAlert): A TTL compatible status signal, representing the SMBusAlert# feature of the PMBus compatible I²C protocol in the power supply. This signal needs to be pulled HI externally through a resistor. Maximum sink current $\leq 4\text{mA}$ and the pull up resistor should be tied to 3.3Vdc. Open collector (HI) on this signal indicates that no Interrupt has been triggered.

Serial Bus Communications

The I²C interface facilitates the monitoring and control of various operating parameters within the unit and transmits these on demand over an industry standard I²C Serial bus.

All signals are referenced to 'Signal Return'.

Device addressing: The microcontroller (MCU) and the EEPROM have the following addresses:

Device	Address	Address Bit Assignments (Most to Least Significant)							
MCU	0xBx	1	0	1	1	A2	A1	A0	R/W

EEPROM	0xAx	1	0	1	0	A2	A1	A0	R/W
--------	------	---	---	---	---	----	----	----	-----

Address lines (A2, A1, A0): These signal pins allow up to eight (8) modules to be addressed on a single I²C bus. The pins are pulled HI internal to the power supply. For a logic LO these pins should be connected to 'Output Return'

Serial Clock (SCL): The clock pulses on this line are generated by the host that initiates communications across the I²C Serial bus. This signal is pulled up internally to 3.3V by a 10k Ω resistor. The end user should add additional pull up resistance as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I²C specifications.

Serial Data (SDA): This line is a bi-directional data line. This signal is pulled up internally to 3.3V by a 10k Ω resistor. The end user should add additional pull up resistance as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I²C specifications.

EEPROM

The microcontroller has 96 bytes of EEPROM memory available for the system host.

Another separate EEPROM IC will provide another 128 bytes of memory with write protect feature. Minimum information to be included in this separate EEPROM: model number, revision, date code, serial number etc.

See the communications protocol for further information.

Communications Protocol

The I²C protocol is described in detail by the *I²C and PMBus Serial Communications Protocol for the CAR Family of Power Supplies* application note.

LEDs

Two LEDs are located on the front faceplate. The AC_OK LED provides visual indication of the INPUT signal function. When the LED is ON GREEN the power supply input is within normal design limits.

The second LED DC/FLT provides visual indication of three different states of the power supply. When the LED is GREEN then there are no faults and the DC output is present. When the LED is AMBER then a fault condition exists but the power supply still provides output power. When the LED is RED then a fault condition exists and the power supply does not provide output power.

CAR1612FP series rectifier


Input: 85Vac to 264Vac; Output: 12 Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A

Alarm Table

Test Condition		LED Indicator		Monitoring Signals			
		LED1 AC	Tri-Color LED2 DC / FLT	FAULT	DC OK	INPUT OK	TEMP OK
1	Normal Operation	Green	Green	High	High	High	High
2	Low or NO INPUT	Off	Red	Low	Low	Low	High
3	OVP	Green	Red	Low	Low	High	High
4	Over Current	Green	Red	Low	Low	High	High
5	Temp Alarm Warning	Green	Orange	High	High	High	Low
6	Fault Over Temp	Green	Red	Low	Low	High	Low
7	Remote ON/OFF	Green	Red	Low	Low	High	High

Note: Test condition #2 had 2 modules plug in. One module is running and the other one is with no AC.

Outline Drawing

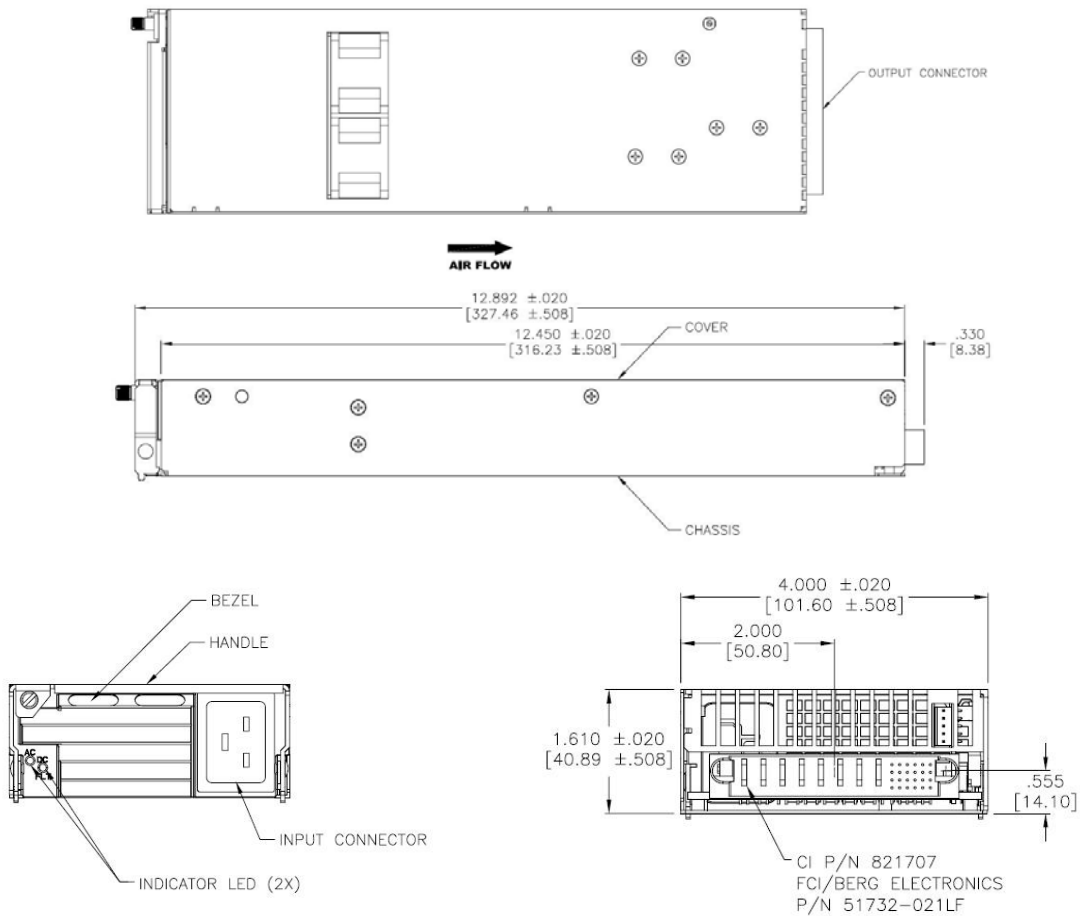


CAR1612FP series rectifier

Input: 85Vac to 264Vac; Output: 12 Vdc @ 1600W; 3.3Vdc or 5 Vdc @ 1A

Connector Pin Assignments

Input Mating Connector: IEC320, C20 type

Output Connector: FCI Berg P/N: 51732-021 or equivalent
Mating connector: 51762-10802400ABLF (right angle mount)

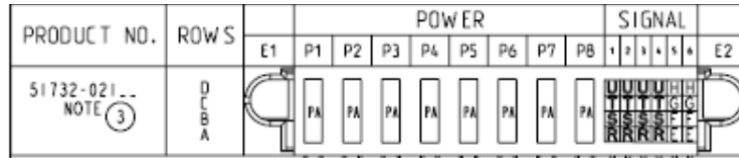

Pin	Function	Pin	Function	Pin	Function	Pin	Function
A1	Vstb [3.3V]	B1	Fault	C1	ISHARE	D1	VProg
A2	Vstb [3.3V] Return	B2	I Monitor (IMON)	C2	N/C	D2	OVP Test Point
A3	Signal Return	B3	Enable: "0" -ON "1" -OFF	C3	Over Temp Warning	D3	Remote ON/OFF
A4	Write Protect (WP)	B4	PS Present	C4	I ² C Address (A0)	D4	DC OK
A5	Remote Sense (+)	B5	SDA (I ² C bus)	C5	I ² C Address (A1)	D5	AC OK
A6	Remote Sense (-)	B6	SCL (I ² C bus)	C6	I ² C Address (A2)	D6	SMBAlert
P1 - P4		Output Return		P5 - P8		+12Vout	

Ordering Information

Please contact your GE Energy Sales Representative for pricing, availability and optional features.

PRODUCT	DESCRIPTION	PART NUMBER
1600W Front-End	+12Vout Front-End, 3.3Vaux, with bezel and PMBus interface	CAR1612FPBXZ01A
1600W Front-End	+12Vout Front-End, 5Vaux, with bezel and PMBus interface	CAR1612FPBX5Z01A
1600W Front-End	+12Vout Front-End, reverse airflow, with bezel and PMBus interface	CAR1612FPBRXZ01A



Contact Us

For more information, call us at

USA/Canada:

+1 888 546 3243, or +1 972 244 9288

Asia-Pacific:

+86.021.54279977*808

Europe, Middle-East and Africa:

+49.89.878067-280

India:

+91.80.28411633

www.ge.com/powerelectronics