


NPN Silicon AF Transistors

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types:
 - BC856T, BC857T,
 - BC858T, BC859T, BC860T

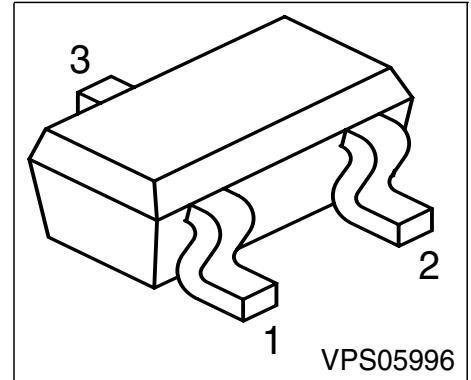

Type	Marking	Pin Configuration			Package
BC846AT	1As	1 = B	2 = E	3 = C	SC75
BC846BT	1Bs	1 = B	2 = E	3 = C	SC75
BC847AT	1Es	1 = B	2 = E	3 = C	SC75
BC847BT	1Fs	1 = B	2 = E	3 = C	SC75
BC847CT	1Gs	1 = B	2 = E	3 = C	SC75
BC848AT	1Js	1 = B	2 = E	3 = C	SC75
BC848BT	1Ks	1 = B	2 = E	3 = C	SC75
BC848CT	1Ls	1 = B	2 = E	3 = C	SC75
BC849BT	2Bs	1 = B	2 = E	3 = C	SC75
BC849CT	2cs	1 = B	2 = E	3 = C	SC75
BC850BT	2Fs	1 = B	2 = E	3 = C	SC75
BC850CT	2Gs	1 = B	2 = E	3 = C	SC75

Maximum Ratings

Parameter	Symbol	BC846T	BC847T BC850T	BC848T BC849T	Unit
Collector-emitter voltage	V_{CEO}	65	45	30	V
Collector-base voltage	V_{CBO}	80	50	30	
Collector-emitter voltage	V_{CES}	80	50	30	
Emitter-base voltage	V_{EBO}	6	6	5	
DC collector current	I_C	100			mA
Peak collector current	I_{CM}	200			mA
Peak base current	I_{BM}	200			
Peak emitter current	I_{EM}	200			
Total power dissipation, $T_S = 109\text{ }^\circ\text{C}$	P_{tot}	250			mW
Junction temperature	T_j	150			$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤ 165	K/W
--	------------	------------	-----

Electrical Characteristics at $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage	$V_{(BR)CEO}$				V
$I_C = 10\text{ mA}, I_B = 0$ BC846T		65	-	-	
$I_C = 10\text{ mA}, I_B = 0$ BC847T/BC850T		45	-	-	
$I_C = 10\text{ mA}, I_B = 0$ BC848T/BC849T		30	-	-	
Collector-base breakdown voltage	$V_{(BR)CBO}$				
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC846T		80	-	-	
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC847T/850T		50	-	-	
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC848T/849T		30	-	-	

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC846T	$V_{(BR)CES}$	65	-	-	V
$I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC847T/850T		50	-	-	
$I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC848T/849T		30	-	-	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}$, $I_C = 0$ BC846T	$V_{(BR)EBO}$	6	-	-	
$I_E = 1 \mu\text{A}$, $I_C = 0$ BC847T/BC850T		6	-	-	
$I_E = 1 \mu\text{A}$, $I_C = 0$ BC848T/BC849T		5	-	-	
Collector cutoff current $V_{CB} = 30 \text{ V}$, $I_E = 0$	I_{CBO}	-	-	15	nA
Collector cutoff current $V_{CB} = 30 \text{ V}$, $I_E = 0$, $T_A = 150^\circ\text{C}$	I_{CBO}	-	-	5	μA
DC current gain 1) $I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group A	h_{FE}	-	140	-	-
$I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group B		-	250	-	
$I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group C		-	480	-	
DC current gain 1) $I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group A	h_{FE}	110	180	220	
$I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group B		200	290	450	
$I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group C		420	520	800	
Collector-emitter saturation voltage1) $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	V_{CEsat}	-	90	250	mV
$I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$		-	200	600	
Base-emitter saturation voltage 1) $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	V_{BEsat}	-	700	-	
$I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$		-	900	-	
Base-emitter voltage 1) $I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$	$V_{BE(ON)}$	580	660	700	
$I_C = 10 \text{ mA}$, $V_{CE} = 5 \text{ V}$		-	-	770	

 1) Pulse test: $t \leq 300 \mu\text{s}$, $D = 2\%$


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 20\text{ mA}, V_{CE} = 5\text{ V}, f = 100\text{ MHz}$	f_T	-	250	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	C_{cb}	-	3	-	pF
Emitter-base capacitance $V_{EB} = 0.5\text{ V}, f = 1\text{ MHz}$	C_{eb}	-	8	-	
Short-circuit input impedance $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{11e}	-	2.7 4.7 8.7	-	k Ω
Open-circuit reverse voltage transf.ratio $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{12e}	-	1.5 2 3	-	10^{-4}
Short-circuit forward current transf.ratio $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{21e}	-	200 330 600	-	-
Open-circuit output admittance $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{22e}	-	18 30 60	-	μS

Total power dissipation $P_{tot} = f(T_S)$

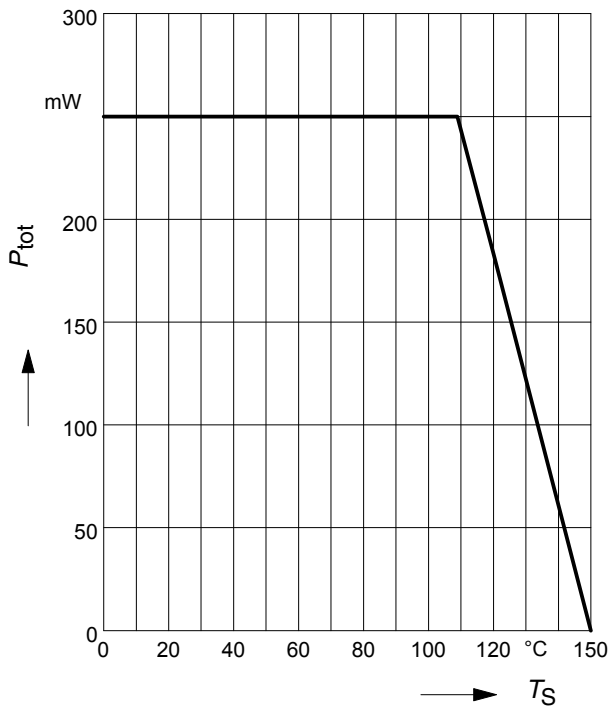


**Collector-base capacitance $C_{CB} = f(V_{CB0})$
Emitter-base capacitance $C_{EB} = f(V_{EB0})$**

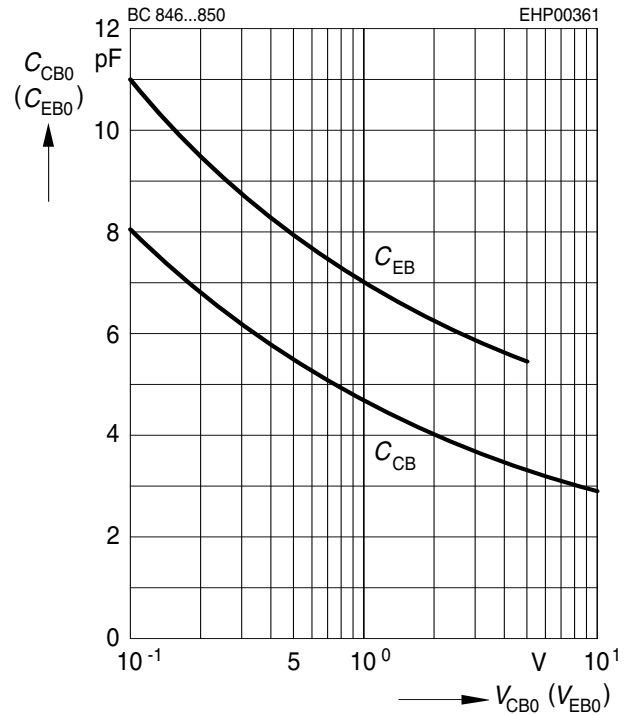


Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

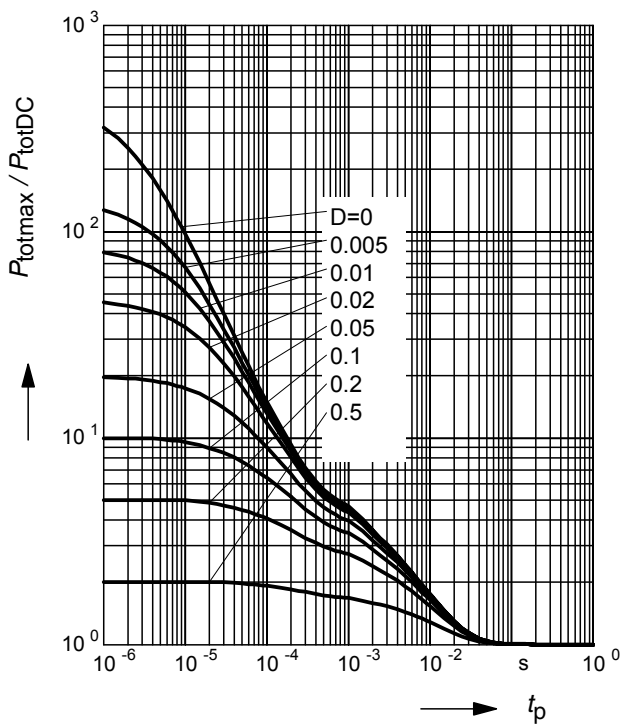


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

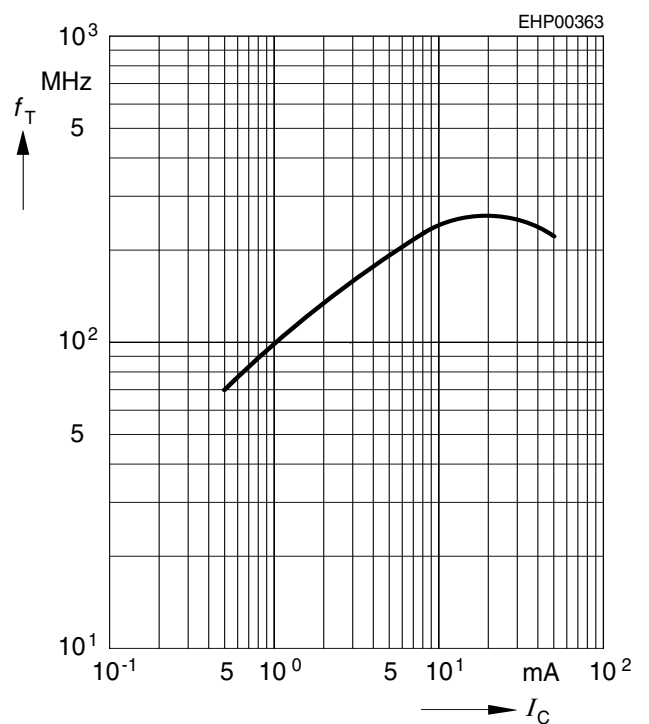


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

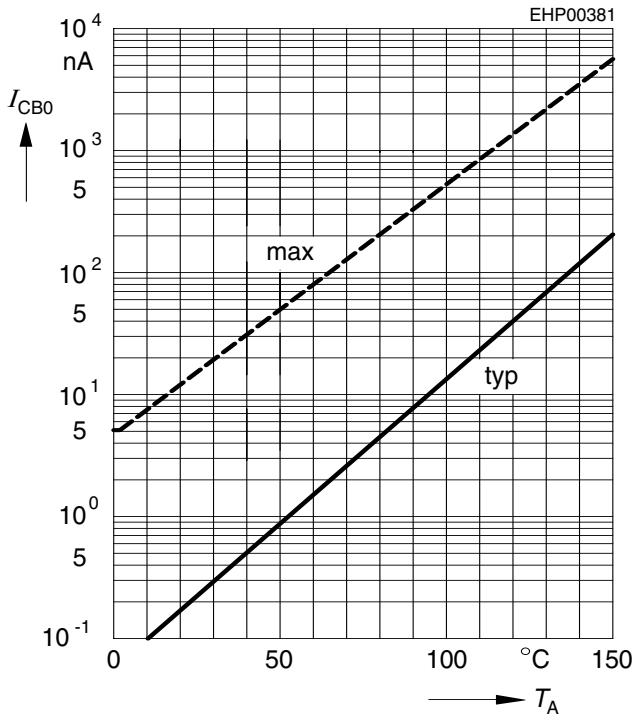


Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 20$

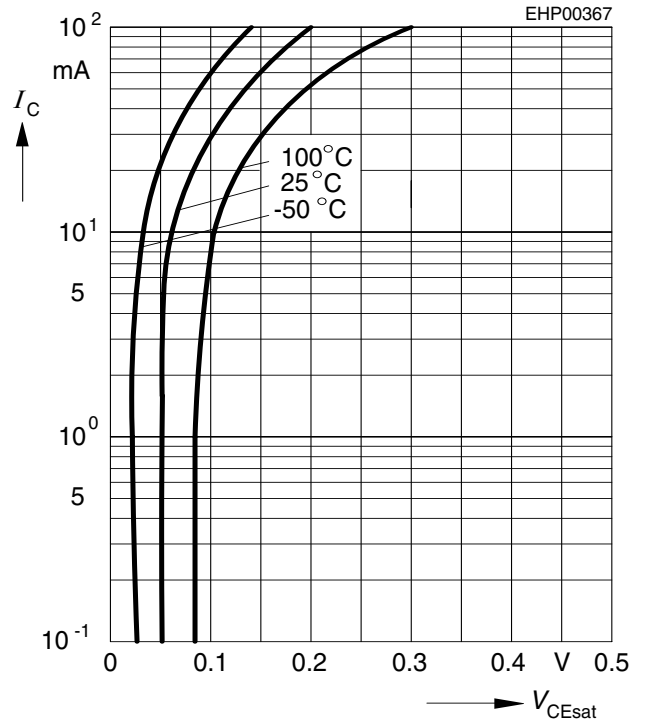


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$

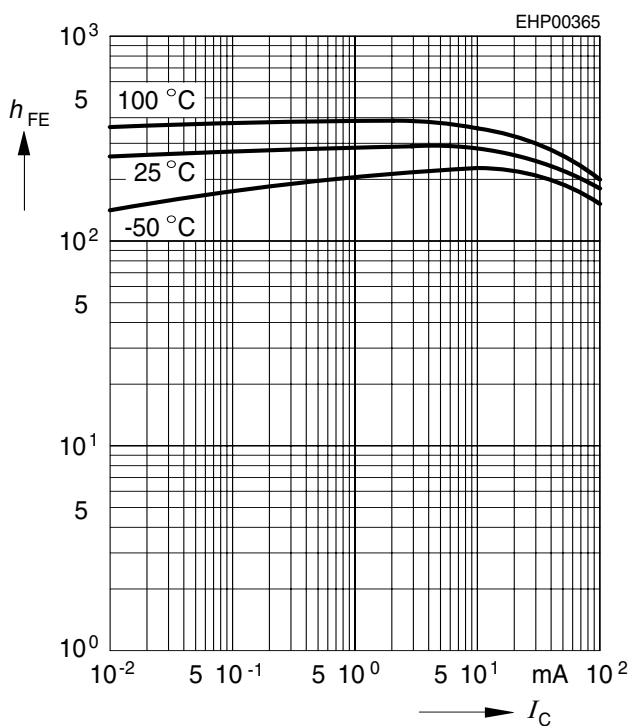


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 20$

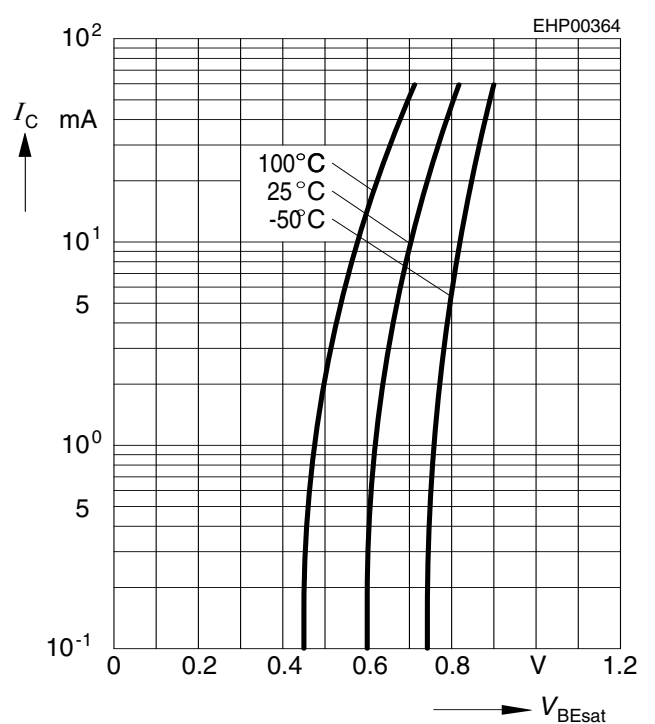


h parameter $h_e = f(I_C)$ normalized

$V_{CE} = 5V$

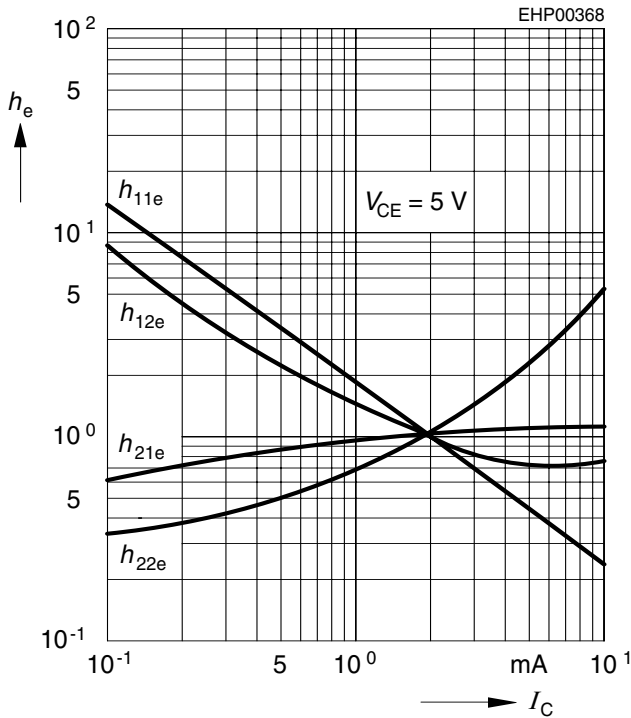


h parameter $h_e = f(V_{CE})$ normalized

$I_C = 2mA$

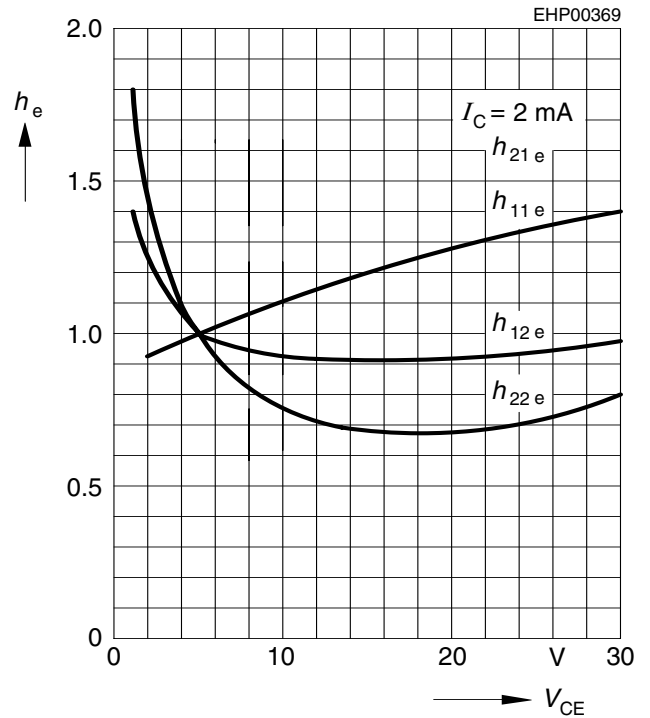


Noise figure $F = f(V_{CE})$

$I_C = 0.2mA, R_S = 2k\Omega, f = 1kHz$

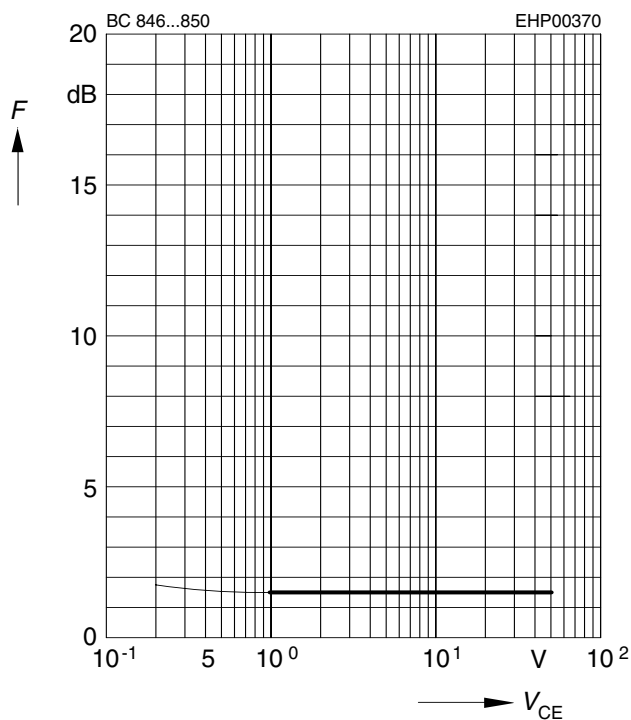


Noise figure $F = f(f)$

$I_C = 0.2mA, V_{CE} = 5V, R_S = 2k\Omega$

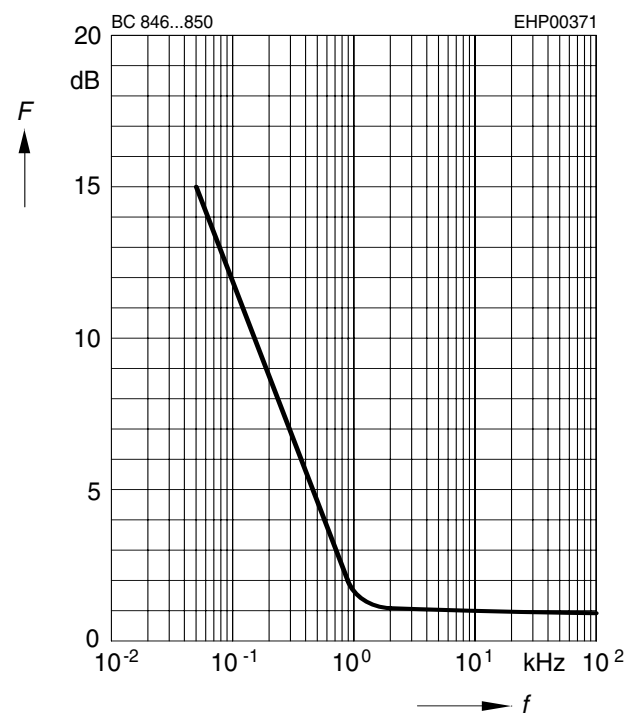


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 120Hz$

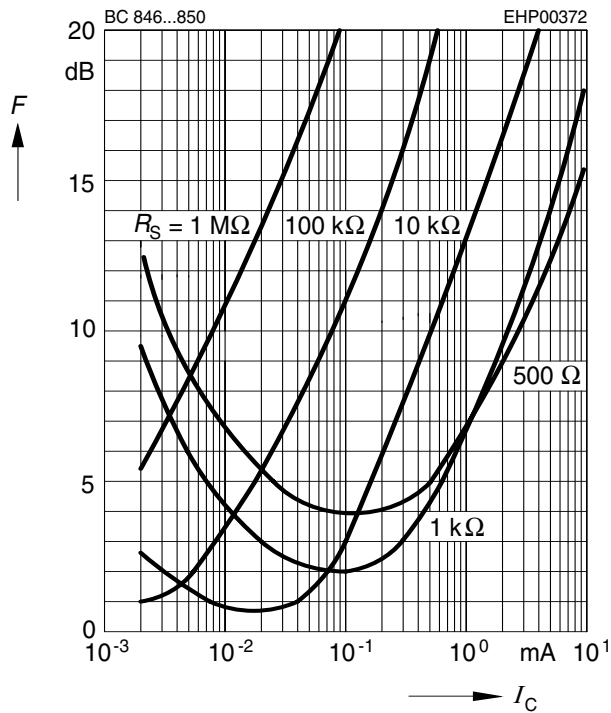

Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 1kHz$

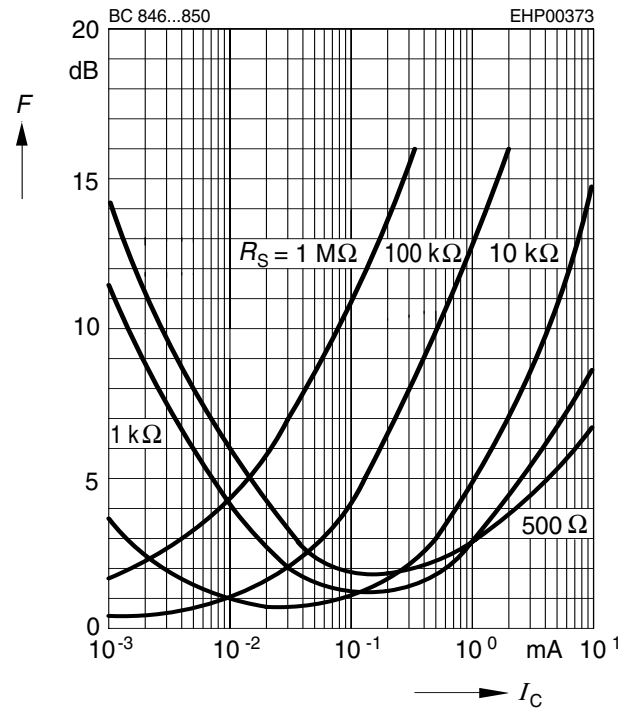

Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 10kHz$

