


Features

Surface Mount Package Ideally Suited for Automatic Insertion
Very Low Leakage Current

Mechanical Data

Case: SOT-23, Molded Plastic
Case material - UL Flammability Rating 94V-0
Moisture sensitivity: Level 1 per J-STD-020A
Terminals: Solderable per MIL-STD-202, Method 208
Polarity: See Diagram
Marking: K52 & Date Code (See Page 2)
Weight: 0.008 grams (approx.)

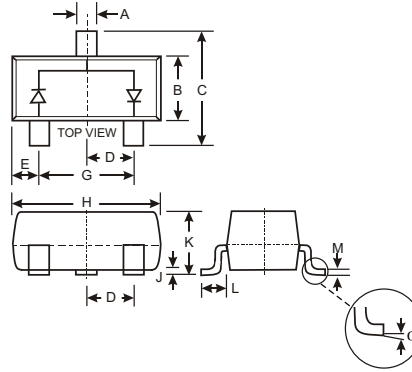

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.85	0.80
	0	8
All Dimensions in mm		


Maximum Ratings @ T_A = 25 C unless otherwise specified

Characteristic	Symbol	BAV199	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	85	V
RMS Reverse Voltage	V _{R(RMS)}	60	V
Forward Continuous Current (Note 2)	I _{FM}	160 140	mA
		Single diode Double diode	
Repetitive Peak Forward Current (Note 2)	I _{FRM}	500	mA
Non-Repetitive Peak Forward Surge Current	I _{FSM}	4.0 1.0 0.5	A
		@ t = 1.0 s @ t = 1.0ms @ t = 1.0s	
Power Dissipation (Note 2)	P _d	250	mW
Thermal Resistance Junction to Ambient Air (Note 2)	R _{JA}	500	C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	C


Electrical Characteristics @ T_A = 25 C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	V _{(BR)R}	85			V	I _R = 100 A
Forward Voltage (Note 1)	V _F			0.90 1.0 1.1 1.25	V	I _F = 1.0mA I _F = 10mA I _F = 50mA I _F = 150mA
Leakage Current (Note 1)	I _R			5.0 80	nA nA	V _R = 75V V _R = 75V, T _j = 150 C
Total Capacitance	C _T		2		pF	V _R = 0, f = 1.0MHz
Reverse Recovery Time	t _{rr}			3.0	s	I _F = I _R = 10mA, I _{rr} = 0.1 x I _R , R _L = 100


Notes: 1. Short duration test pulse to minimize self-heating effect.
2. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

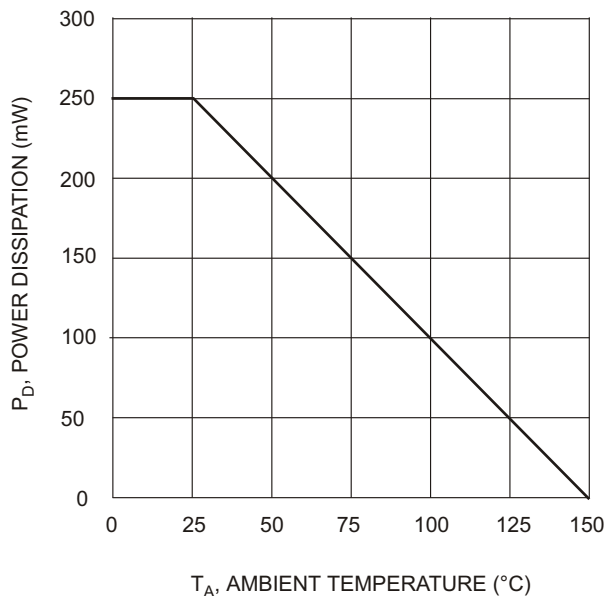


T_A, AMBIENT TEMPERATURE (°C)
Fig. 1 Power Derating Curve

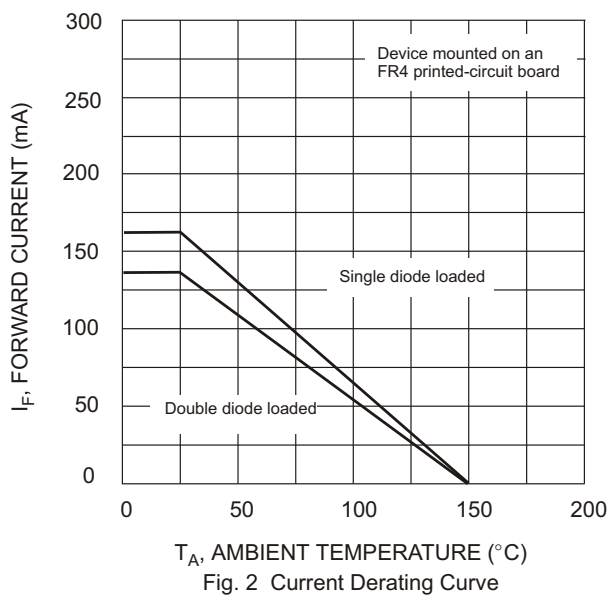

T_A, AMBIENT TEMPERATURE (°C)
Fig. 2 Current Derating Curve

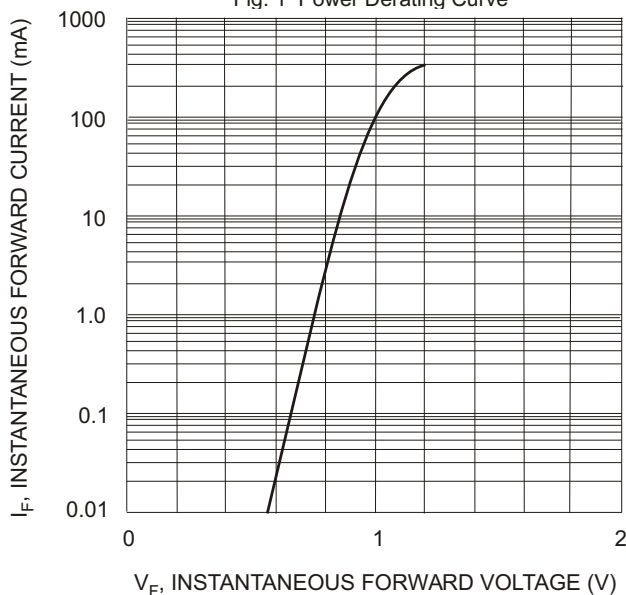

V_F, INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 3 Typical Forward Characteristics

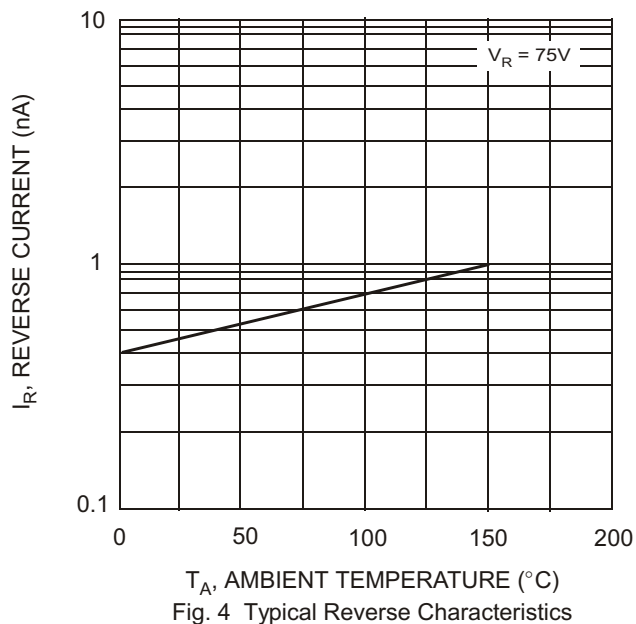


T_A, AMBIENT TEMPERATURE (°C)
Fig. 4 Typical Reverse Characteristics

Ordering Information (Note 3)

Device	Packaging	Shipping
BAV199-7	SOT-23	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information

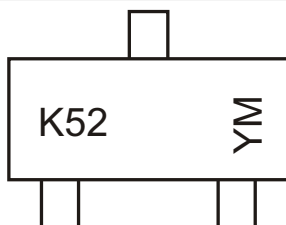

K52 = Product Type Marking Code
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

Date Code Key

Year	2001	2002	2003	2004	2005
Code	M	N	P	R	S

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D