

FEATURES

- New Sub-Miniature SIP & DIP Styles
- 3kVDC Isolation
- Efficiency to 81%
- Wide Temperature performance at full 1 Watt load, -40°C to 85°C
- Increased Power Density to 1.95W/cm³
- UL 94V-0 Package Material
- Footprint 0.69cm²
- Single Isolated Output
- Industry Standard Pinout
- 3.3V, 5V & 12V Input
- 3.3V, 5V, 9V, 12V and 15V Output
- No Heatsink Required
- Internal SMD Construction
- Fully Encapsulated with Toroidal Magnetics
- No External Components Required
- MTF up to 2.4 Million hours
- Custom Solutions Available
- No Electrolytic or Tantalum Capacitors

DESCRIPTION

The NKE sub-miniature series of DC-DC Converters is particularly suited to isolating and/or converting DC power rails. A smaller package size, improved efficiency, lower output ripple and 3kVDC isolation capability through state of the art packaging and improved technology. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The wide temperature range guarantees startup from -40°C and full 1 watt output at 85°C.

SELECTION GUIDE

| | Nominal Input Voltage | Output Voltage | Output Current | Input Current at Rated Load | Efficiency | Isolation Capacitance | MTTF ¹ |
|------------------------|-----------------------|----------------|----------------|-----------------------------|------------|-----------------------|-------------------|
| OrderCode [†] | (V) | (V) | (mA) | (mA) | (%) | (pF) | kHrs |
| NKE0303S | 3.3 | 3.3 | 303 | 400 | 75 | 30 | 1234 |
| NKE0305S | 3.3 | 5 | 200 | 400 | 76 | 35 | 632 |
| NKE0503S | 5 | 3.3 | 303 | 270 | 75 | 40 | 619 |
| NKE0505SE | 5 | 5 | 200 | 250 | 78 | 34 | 419 |
| NKE0505S | 5 | 5 | 200 | 289 | 69 | 28 | 2414 |
| NKE0509S | 5 | 9 | 111 | 266 | 75 | 29 | 1173 |
| NKE0512S | 5 | 12 | 83 | 260 | 77 | 30 | 633 |
| NKE0515S | 5 | 15 | 66 | 256 | 78 | 32 | 360 |
| NKE1205S | 12 | 5 | 200 | 117 | 71 | 35 | 620 |
| NKE1209S | 12 | 9 | 111 | 107 | 78 | 50 | 488 |
| NKE1212S | 12 | 12 | 83 | 105 | 79 | 57 | 360 |
| NKE1215S | 12 | 15 | 66 | 103 | 81 | 60 | 252 |

[†] For DIP package style replace suffix S with D, eg NKE0303D.
When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS

| Parameter | Conditions | MIN | TYP | MAX | Units |
|--------------------------|--|------|------|------|--------|
| Voltage Range | Continuous operation, 3.3V input types | 2.97 | 3.3 | 3.63 | V |
| | Continuous operation, 5V input types | 4.5 | 5.0 | 5.5 | |
| | Continuous operation, 12V input types | 10.8 | 12.0 | 13.2 | |
| Reflected Ripple Current | | | 40 | 60 | mA p-p |

OUTPUT CHARACTERISTICS

| Parameter | Conditions | TYP | MAX | Units |
|------------------------------|---|-----|-----|--------|
| Rated Power ² | T _A = -40°C to 85°C | | 1 | W |
| Voltage Set Point Accuracy | See tolerance envelope | | | |
| Line regulation | High V _{IN} to low V _{IN} | 1.0 | 1.2 | %/% |
| Load Regulation ³ | 10% load to rated load, 3.3V output types | 10 | 15 | % |
| | 10% load to rated load, 5V output types | 12 | 15 | |
| | 10% load to rated load, 9V output types | 7.5 | 10 | |
| | 10% load to rated load, 12V output types | 6.5 | 9.5 | |
| Ripple and Noise | 10% load to rated load, 15V output types | 6.0 | 8.5 | mV p-p |
| | BW=DC to 20MHz, 3.3V output types | 40 | 80 | |
| | BW=DC to 20MHz, 5V output types | 77 | 100 | |
| | BW=DC to 20MHz, 9V output types | 43 | 90 | |
| | BW=DC to 20MHz, 12V output types | 35 | 65 | |
| | BW=DC to 20MHz, 15V output types | 32 | 55 | |

ABSOLUTE MAXIMUM RATINGS

| | |
|---|----------|
| Short circuit duration ⁴ | 1 second |
| Internal power dissipation | 530mW |
| Lead temperature 1.5mm from case for 10 seconds | 300°C |
| Input voltage V _{in} NKE03 types | 5.5V |
| Input voltage V _{in} NKE05 types | 7V |
| Input voltage V _{in} NKE12 types | 15V |

1 Calculated using MIL-HDBK-217F with nominal input voltage at full load.
2 See derating curve.
3 12V input types have typically 3% less load regulation change.
4 Supply voltage must be discontinued at the end of the short circuit duration.
All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

NKE SERIES

Isolated Sub-Miniature 1W Single Output DC-DC Converters

ISOLATION CHARACTERISTICS

| Parameter | Conditions | MIN | TYP | MAX | Units |
|------------------------|---------------------------|------|-----|-----|-------|
| Isolation Test Voltage | Flash tested for 1 second | 3000 | | | VDC |
| Resistance | Viso=500VDC | | 10 | | G |


GENERAL CHARACTERISTICS

| Parameter | Conditions | MIN | TYP | MAX | Units |
|---------------------|-----------------|-----|-----|-----|-------|
| Switching Frequency | All input types | | 115 | | kHz |


TEMPERATURE CHARACTERISTICS

| Parameter | Conditions | MIN | TYP | MAX | Units |
|--------------------------------|------------------------|-----|-----|-----|-------|
| Specification | All output types | -40 | | 85 | °C |
| Storage | | -50 | | 130 | °C |
| Case Temperature above ambient | 0505D/S, 1205D/S | | | 41 | °C |
| | All other output types | | | 32 | °C |
| Cooling | Free air convection | | | | |


PERFORMANCE CHARACTERISTICS

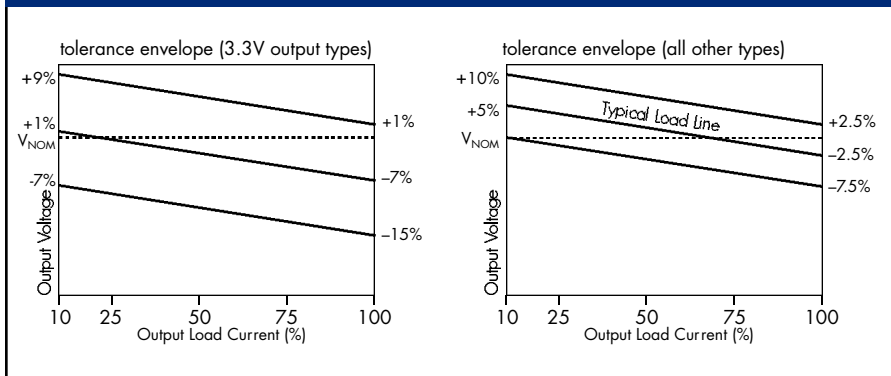

TEMPERATURE CHARACTERISTICS

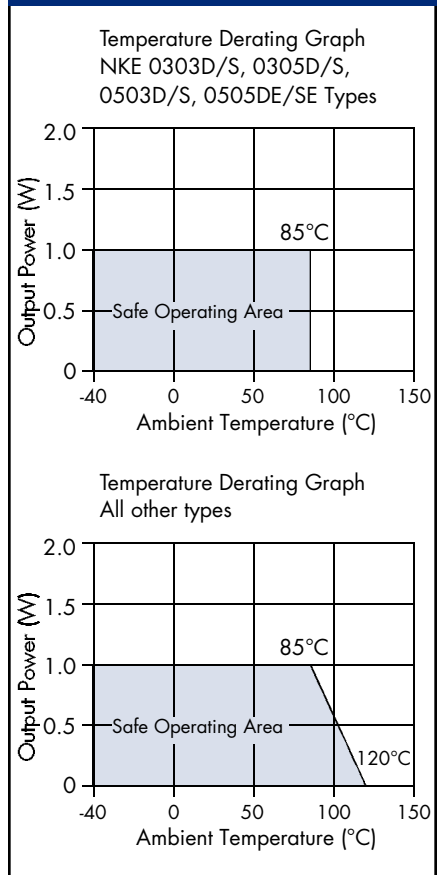

MECHANICAL DIMENSIONS

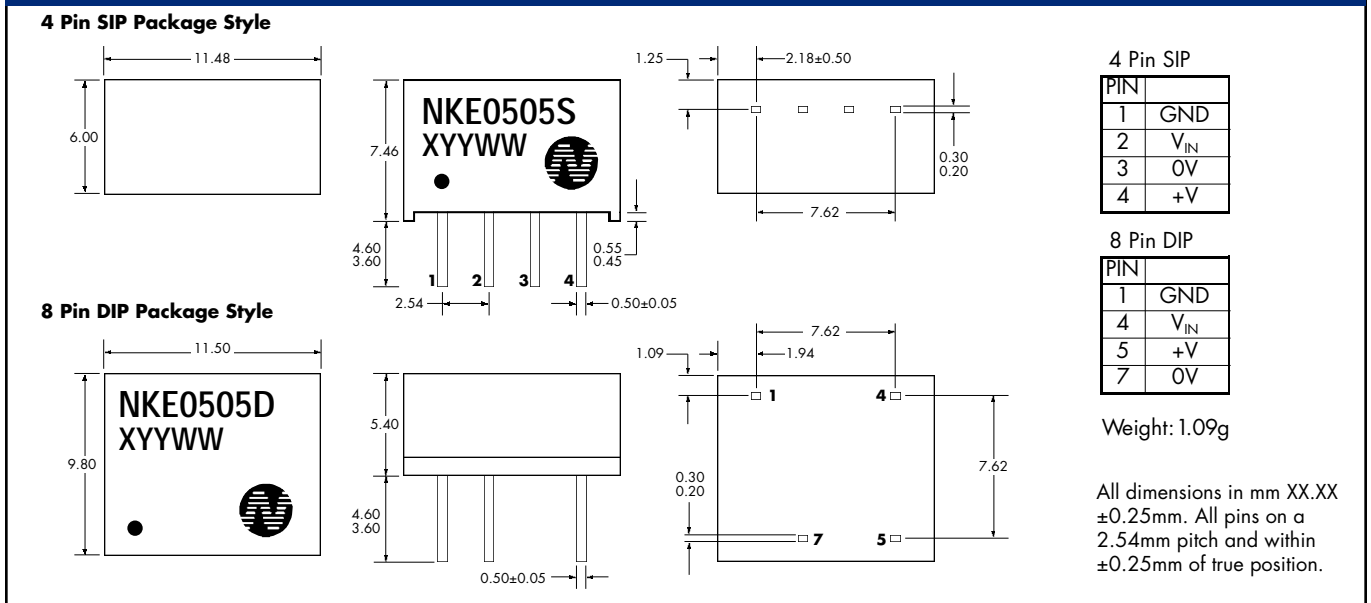

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2001

NDC NKE.5

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited.

Instructions for use are available from www.dc-dc.com

C&D Technologies (NCL) Ltd
Tanners Drive, Blakelands North
Milton Keynes MK14 5BU, England
Tel: +44 (0)1908 615232
Fax: +44 (0)1908 617545
email: info@cdtechno-ncl.com

[www: http://www.dc-dc.com](http://www.dc-dc.com)

C&D Technologies (NCL), Inc.
5816 Creedmoor Road, Raleigh
NC 27612, USA
Tel: +1 (919) 571-9405
Fax: +1 (919) 571-9262
email: info@us.cdtechno-ncl.com

C&D TECHNOLOGIES
Power Solutions