

# SAW Components

Data Sheet B7841






SAW Components		B7841
Low-Loss Filter		2441,75 MHz
Data Sheet	SMD	

### Features

Terminals

• Ni, gold-plated

- Low-loss RF filter for bluetooth
- Usable passband 83,5 MHz
- Unbalanced to unbalanced operation
- Package for Surface Mounted Technology (SMT)




Chip Sized Saw Package

#### Dimensions in mm, approx. weight 0,007g

#### **Pin configuration**

1	Input, unbalanced
4	Output, unbalanced
2,5	Case ground
3	to be grounded



Туре	Ordering code	Marking and Package	Packing	
		according to	according to	
B7841	B39242-B7841-C710	C61157-A7-A82	F61074-V8151-Z000	

Electrostatic Sensitive Device (ESD)

#### **Maximum ratings**

Operable temperature range	T	– 40 /+ 85	°C	
Storage temperature range	T <sub>stg</sub>	– 40 /+ 85	°C	
DC voltage	V <sub>DC</sub>	3	V	
ESD voltage	V <sub>ESD</sub>	50*	V	Machine Model, 10 pulses
Input power max. 24002483,5 MHz 824915, 17101980 MHz	P <sub>IN</sub>	6 15	dBm	source/load impedance 50 $\Omega$

2

\* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses




SAW Components					B7841
Low-Loss Filter				2441,7	5 MHz
Data Sheet 🔤 🔤					
Characteristics					
Terminating source impedance: Z <sub>S</sub>	= 50 Ω	o + 85 °C – 1,5 nH ( – 2,5 nH (			
		min.	typ.	max.	
Center frequency	f <sub>c</sub>	_	2441,75	—	MHz
Maximum insertion attenuation	$lpha_{max}$				
2400,0 2483,5 MHz		—	2,2	3,3	dB
Return loss					
2400,0 2483,5 MHz*)		9,0	11,5	—	dB
Amplitude ripple (p-p)	Δα				
2400,0 2483,5 MHz		_	0,5	1,5	dB
Attenuation	α				
100,0 960,0 MHz		40	44	—	dB
960,0 2150,0 MHz		32	38	—	dB
2150,0 2170,0 MHz		30	36	—	dB
2170,0 2250,0 MHz		20	35	—	dB
2250,0 2295,0 MHz		15	21	—	dB
2295,0 2300,0 MHz		12	20	—	dB
2550,0 2600,0 MHz		15	20	_	dB
2600,0 2650,0 MHz		18	23	—	dB
2650,0 2800,0 MHz		20	24	—	dB
2800,0 4000,0 MHz		25	30	—	dB
4000,0 6000,0 MHz		30	50	—	dB

\*) *T* = +25 °C



SAW Components		B7841
Low-Loss Filter		2441,75 MHz
Data Sheet	SMD	

## **Transfer function**

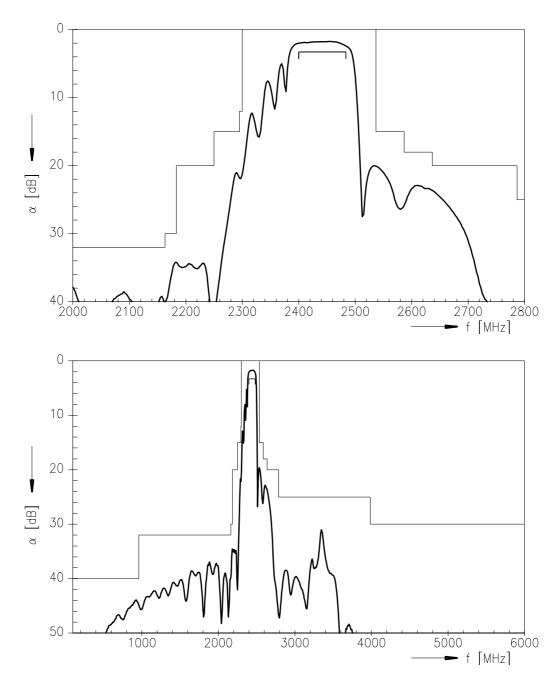

4



SAW Components	B7841
Low-Loss Filter	2441,75 MHz
Data Sheet	

Published by EPCOS AG SAW MC WT, P.O. Box 80 17 09, 81617 Munich, GERMANY TEL +49 89 636 09, FAX +49 89 636 2 26 89

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

