

DATA SHEET

PHN405

4 N-channel 60 m Ω FET array
enhancement mode MOS
transistors

Product specification
Supersedes data of 1997 Jun 19
File under Discrete Semiconductors, SC13

1998 Mar 17

4 N-channel 60 mΩ FET array enhancement mode MOS transistors

PHN405

FEATURES

- High-speed switching
- No secondary breakdown
- Very low on-state resistance
- Current monitoring.

APPLICATIONS

- Motor and actuator driver
- Power management
- Synchronized rectification.

DESCRIPTION


Four enhancement mode MOS transistors in a 16-pin plastic SOT338-1 (SSOP16) package. Two transistors feature current monitoring (sense FETs).

PINNING - SOT338-1 (SSOP16)

PIN	SYMBOL	DESCRIPTION
1 and 4	d ₁	drain 1
2	s ₁	source 1
3	g ₁	gate 1
5 and 8	d ₂	drain 2
6	s ₂	source 2
7	g ₂	gate 2
9	g ₃	gate 3
10	s ₃	source 3
11 and 15	d ₃	drain 3
12	m ₃	current monitor 3
13	g ₄	gate 4
14	s ₄	source 4
16	m ₄	current monitor 4

CAUTION

The device is supplied in an antistatic package.
The gate-source input must be protected against static discharge during transport or handling.

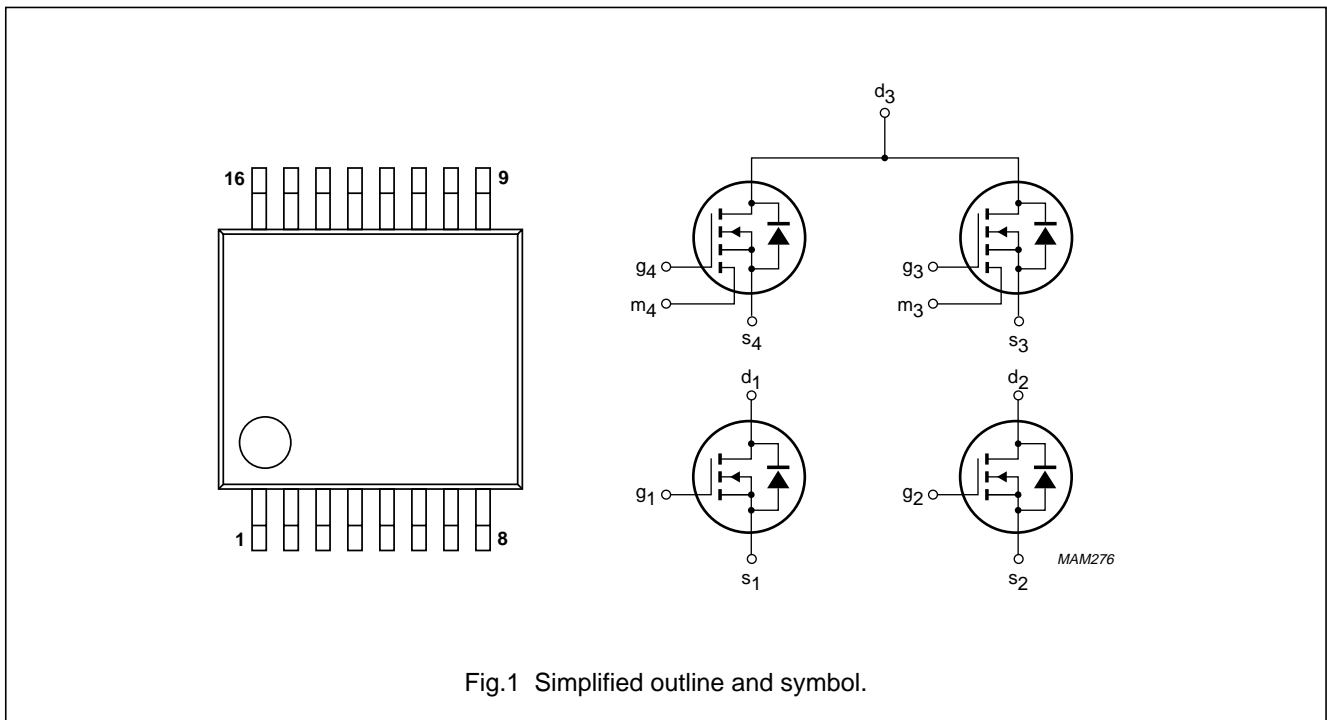

4 N-channel 60 mΩ FET array enhancement mode MOS transistors

PHN405

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{DS}	drain-source voltage (DC)		–	30	V
V_{GS}	gate-source voltage (DC)		–	±20	V
V_{GSth}	gate-source threshold voltage	$I_D = 1 \text{ mA}; V_{DS} = V_{GS}$	1	2.8	V
I_D	drain current (DC)	$T_s = 80 \text{ °C}$	–	3.7	A
R_{DSon}	drain-source on-state resistance	$I_D = 2 \text{ A}; V_{GS} = 10 \text{ V}$	–	60	mΩ
P_{tot}	total power dissipation	$T_s = 80 \text{ °C}$	–	1.4	W

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).



SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
Per FET					
V_{DS}	drain-source voltage (DC)		–	30	V
V_{GS}	gate-source voltage (DC)		–	±20	V
I_D	drain current (DC)	$T_s = 80 \text{ °C}; \text{note 1}$	–	3.7	A
I_{DM}	peak drain current	note 2	–	14.8	A
P_{tot}	total power dissipation	$T_s = 80 \text{ °C}; \text{note 3}$	–	1.4	W
		$T_s = 80 \text{ °C}; \text{note 4}$	–	1.25	W
		$T_s = 80 \text{ °C}; \text{note 5}$	–	1.09	W
T_{stg}	storage temperature		–55	+150	°C
T_j	operating junction temperature		–55	+150	°C
Current monitor					
I_M	monitor current (DC)	$T_s = 80 \text{ °C}$	–	50	mA
I_{MM}	peak monitor current	note 2	–	220	mA
Source-drain diode					
I_S	source current (DC)	$T_s = 80 \text{ °C}$	–	1.4	A
I_{SM}	peak source current	note 2	–	5.6	A

Notes

- T_s is the temperature at the soldering point of the drain lead.
- Pulse width and duty cycle limited by maximum junction temperature.
- When only one FET dissipates.
- When either FETs 1 and 3 or 2 and 4 dissipate an equal amount of power.
- When all four FETs dissipate an equal amount of power.

4 N-channel 60 mΩ FET array
enhancement mode MOS transistors

PHN405

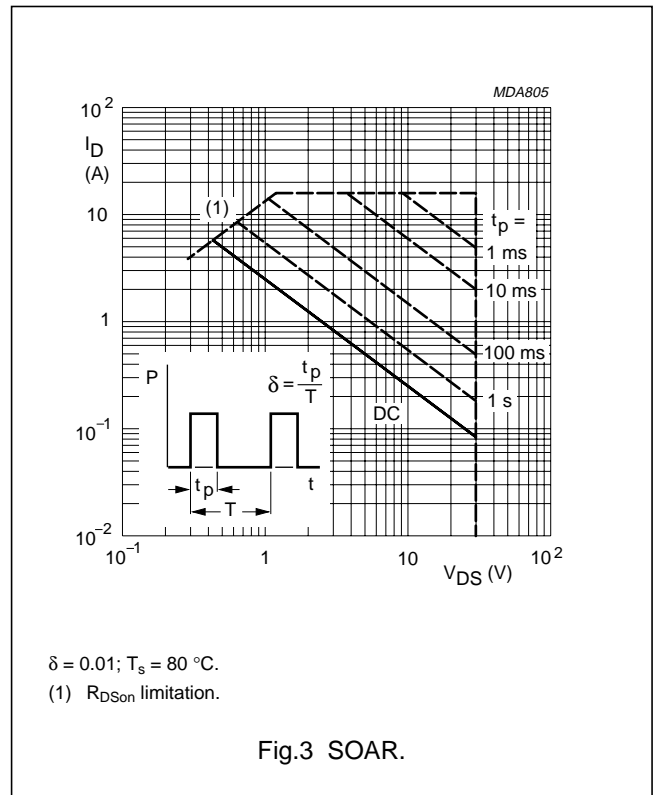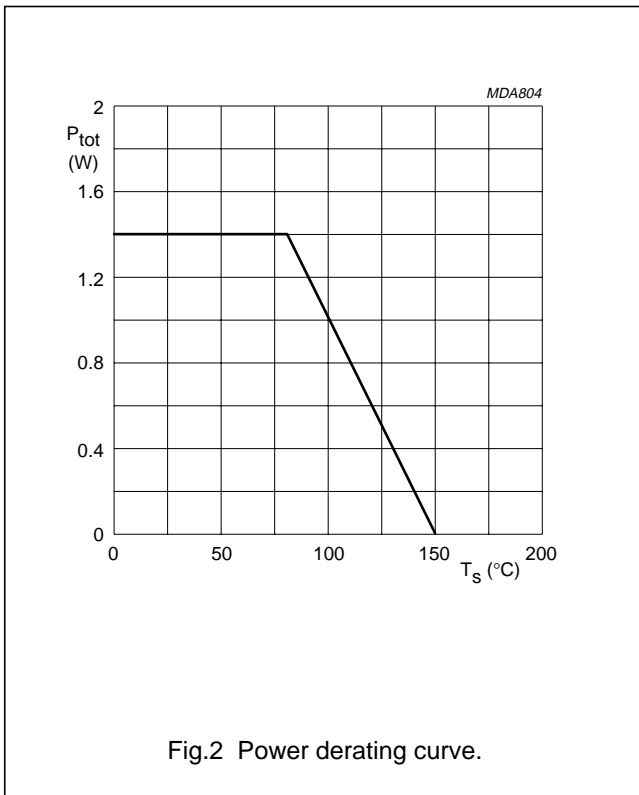

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
Per FET				
$R_{th\ j-s}$	thermal resistance from junction to soldering point	note 1	50	K/W
		note 2	56	K/W
		note 3	64	K/W

Notes

1. When only one FET dissipates.
2. When either FETs 1 and 3 or 2 and 4 dissipate an equal amount of power.
3. When all four FETs dissipate an equal amount of power.

4 N-channel 60 mΩ FET array enhancement mode MOS transistors

PHN405

CHARACTERISTICST_j = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Per FET						
V _{(BR)DSS}	drain-source breakdown voltage	V _{GS} = 0; I _D = 10 μA	30	–	–	V
V _{GSth}	gate-source threshold voltage	V _{GS} = V _{DS} ; I _D = 1 mA	1	–	2.8	V
I _{DSS}	drain-source leakage current	V _{GS} = 0; V _{DS} = 24 V	–	–	100	nA
I _{GSS}	gate leakage current	V _{GS} = ±20 V; V _{DS} = 0	–	–	±100	nA
R _{DSon}	drain-source on-state resistance	V _{GS} = 4.5 V; I _D = 1 A	–	–	120	mΩ
		V _{GS} = 10 V; I _D = 2 A	–	–	60	mΩ
C _{iss}	input capacitance	V _{GS} = 0; V _{DS} = 24 V; f = 1 MHz	–	230	–	pF
C _{oss}	output capacitance	V _{GS} = 0; V _{DS} = 24 V; f = 1 MHz	–	90	–	pF
C _{rss}	reverse transfer capacitance	V _{GS} = 0; V _{DS} = 24 V; f = 1 MHz	–	50	–	pF
Q _G	total gate charge	V _{GS} = 10 V; V _{DD} = 15 V; I _D = 1 A	–	7.1	10	nC
Q _{GS}	gate-source charge	V _{DD} = 15 V; I _D = 1 A;	–	0.5	–	nC
Q _{GD}	gate-drain charge	V _{DD} = 15 V; I _D = 1 A;	–	2.4	–	nC
Switching times						
t _{d(on)}	turn-on delay time	V _{GS} = 0 to 10 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	3.5	–	ns
t _f	fall time	V _{GS} = 0 to 10 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	3.5	–	ns
t _{on}	turn-on switching time	V _{GS} = 0 to 10 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	7	10	ns
t _{d(off)}	turn-off delay time	V _{GS} = 10 to 0 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	12	–	ns
t _r	rise time	V _{GS} = 10 to 0 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	8	–	ns
t _{off}	turn-off switching time	V _{GS} = 10 to 0 V; V _{DD} = 20 V; I _D = 1 A; R _{gen} = 6 Ω	–	20	30	ns
Current monitor						
R _{DMon}	on-state drain-monitor resistance	V _{GM} = 10 V; I _D = 25 mA; I _S = 0	–	–	4	Ω
		V _{GM} = 4.5 V; I _D = 12 mA; I _S = 0	–	–	8	Ω
I _S /I _M	source to monitor current ratio	V _{GS} = 10 V; I _D = 2 A; V _{MS} = 0	–	66.7	–	
C _{Moss}	output capacitance of monitor cells	V _{GM} = V _{MS} = 0; V _{DS} = 24 V; f = 1 MHz	–	1.35	–	pF
Source-drain diode						
V _{SD}	source-drain diode forward voltage	V _{GD} = 0; I _S = 1.25 A	–	–	1	V
t _{rr}	reverse recovery time	I _S = 1.25 A; di/dt = –100 A/μs	–	25	–	ns

4 N-channel 60 mΩ FET array enhancement mode MOS transistors

PHN405

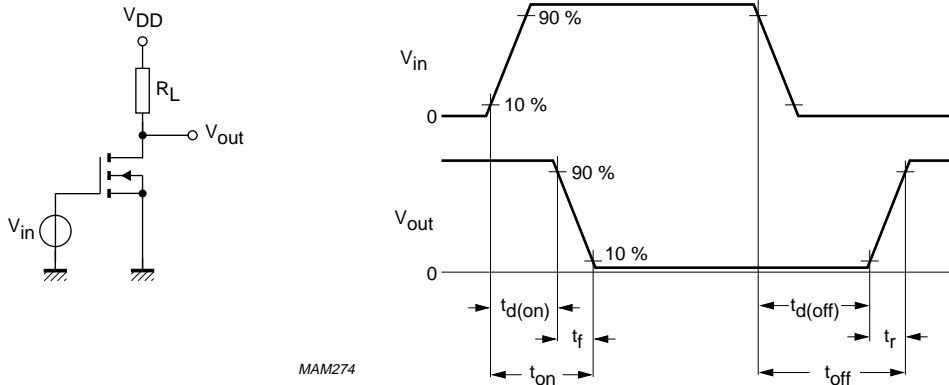


Fig.4 Switching times test circuit with input and output waveforms.





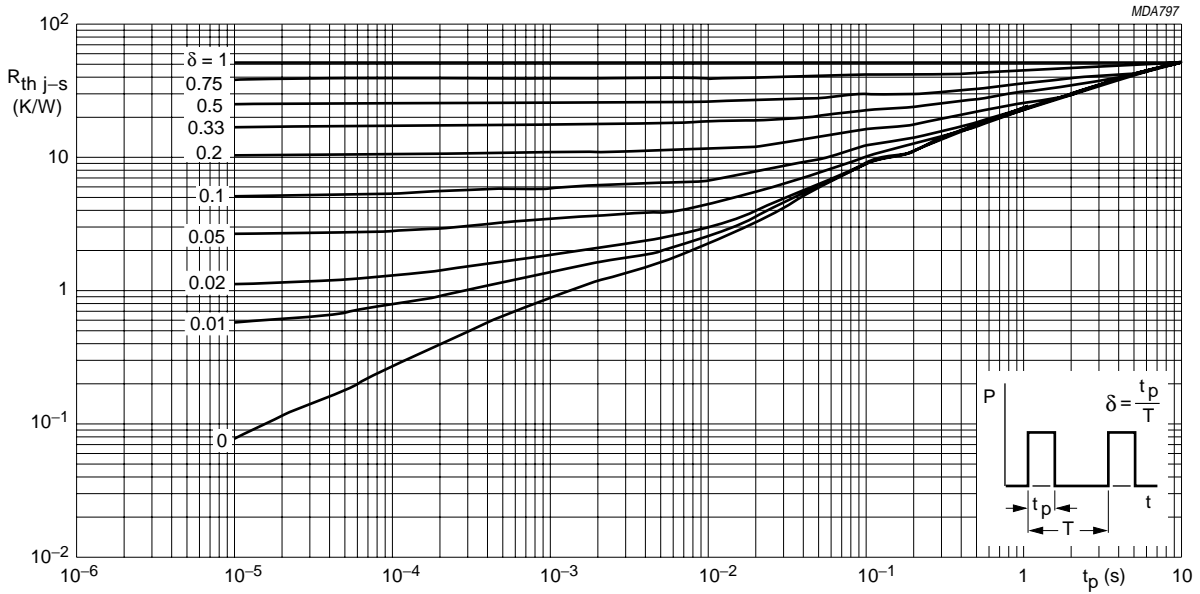


Fig.5 Transient thermal resistance from junction to soldering point as a function of pulse time; typical values.



4 N-channel 60 mΩ FET array
enhancement mode MOS transistors

PHN405

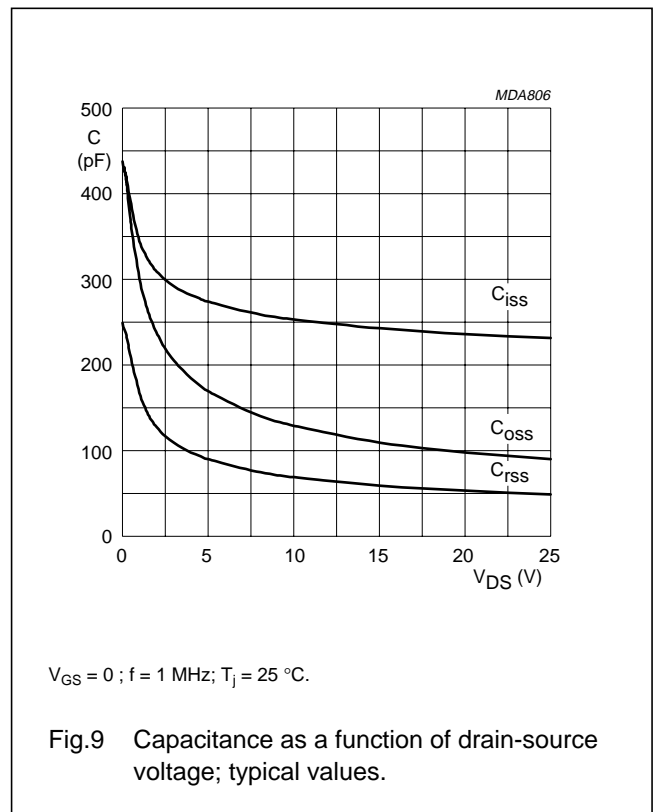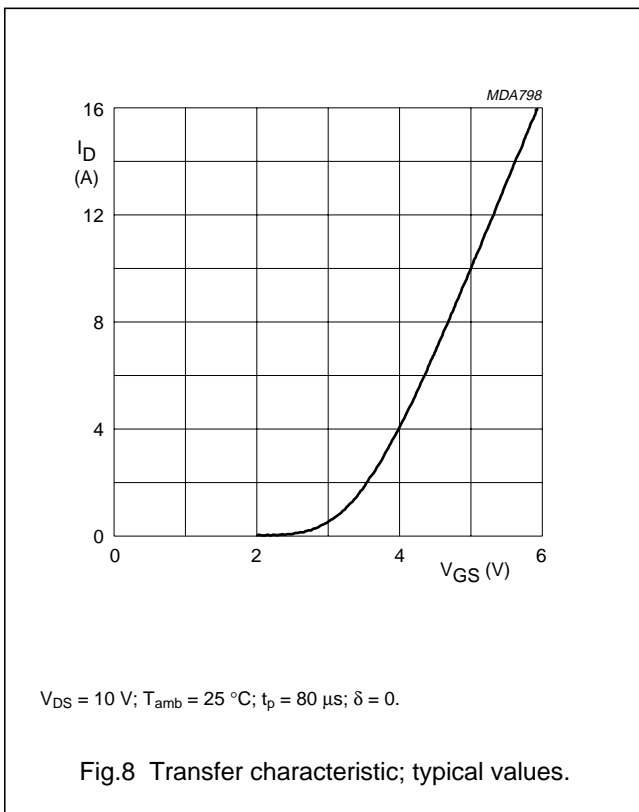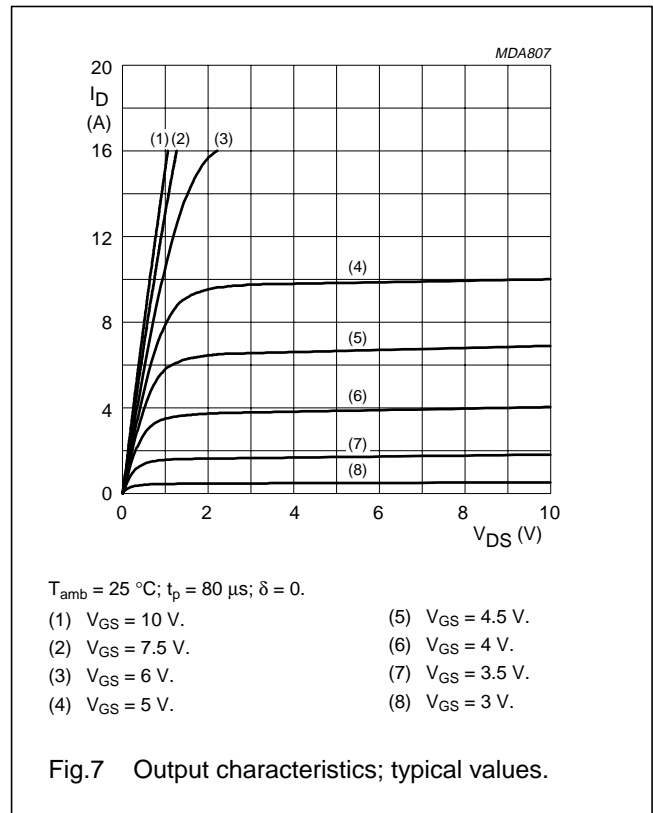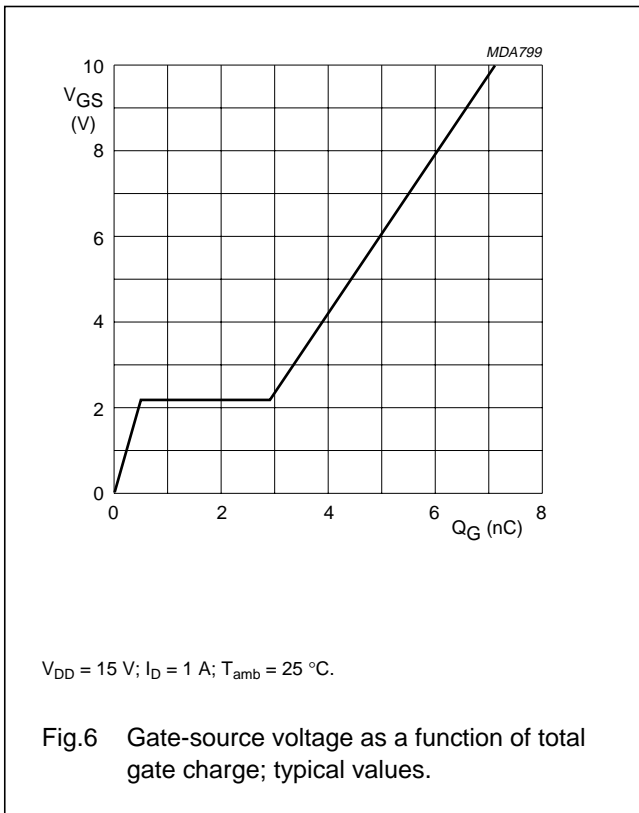



4 N-channel 60 mΩ FET array
enhancement mode MOS transistors

PHN405

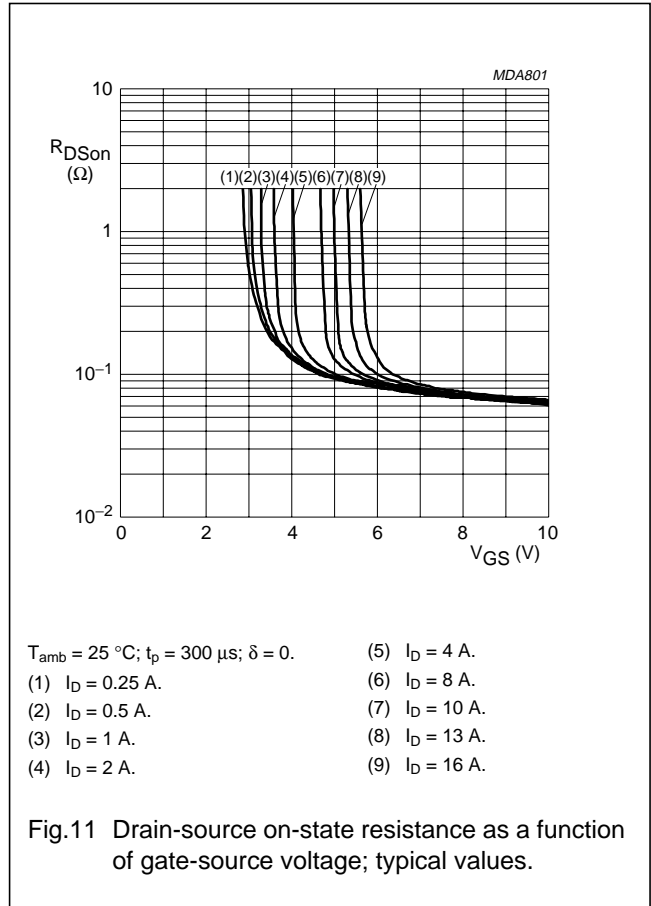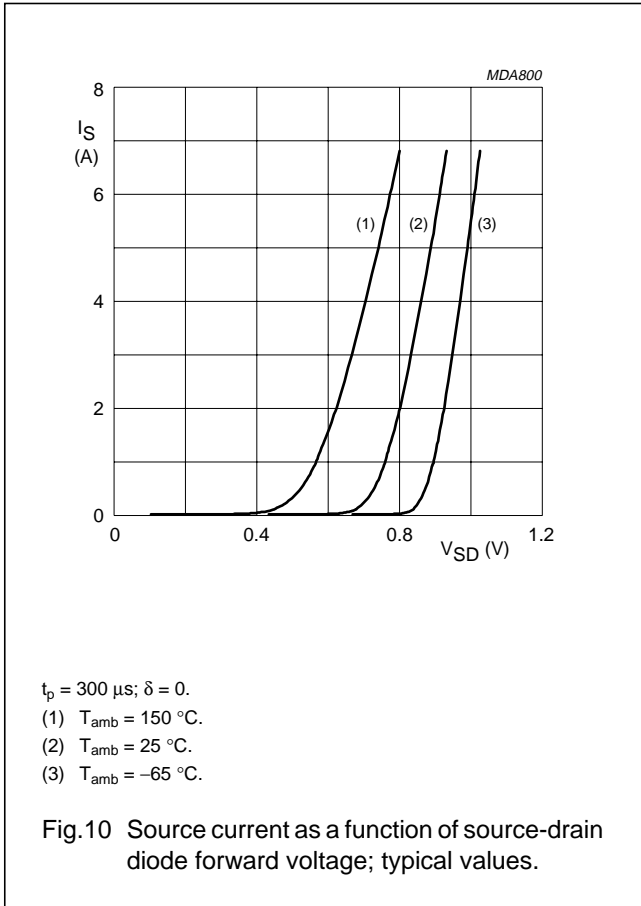

4 N-channel 60 mΩ FET array
enhancement mode MOS transistors

PHN405

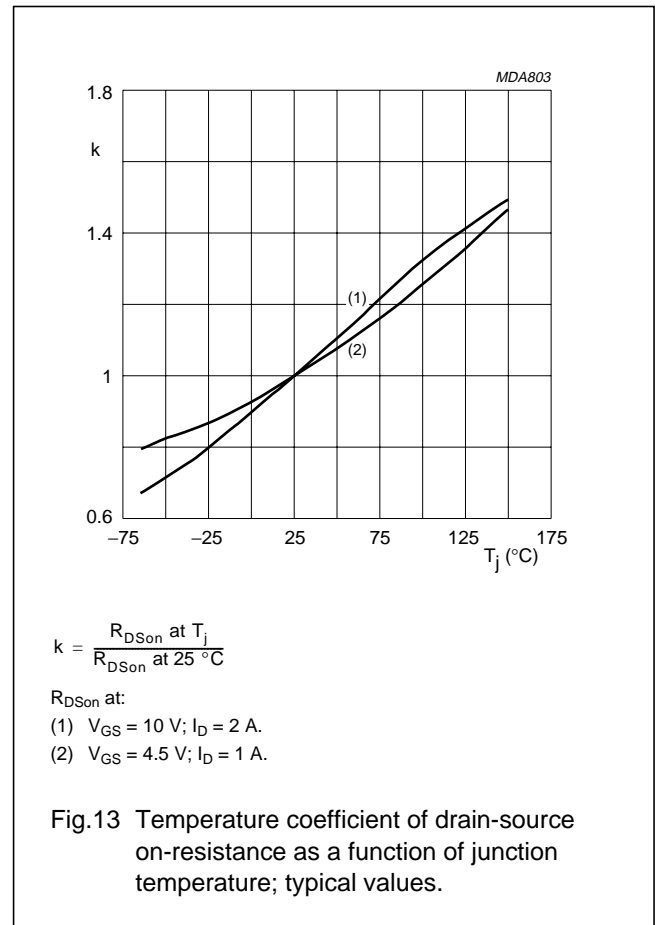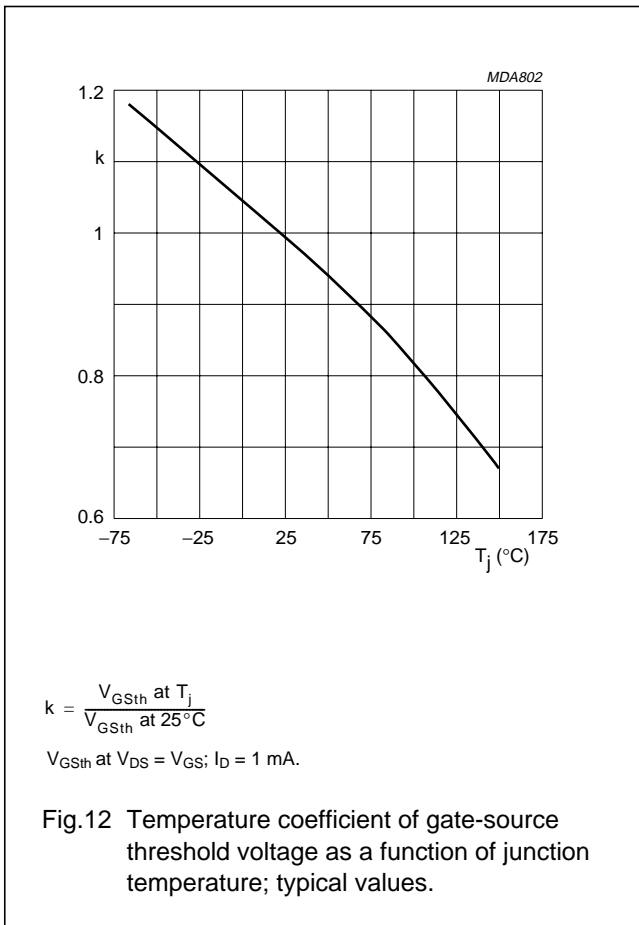


4 N-channel 60 mΩ FET array
enhancement mode MOS transistors

PHN405

PACKAGE OUTLINE

SSOP16: plastic shrink small outline package; 16 leads; body width 5.3 mm

SOT338-1

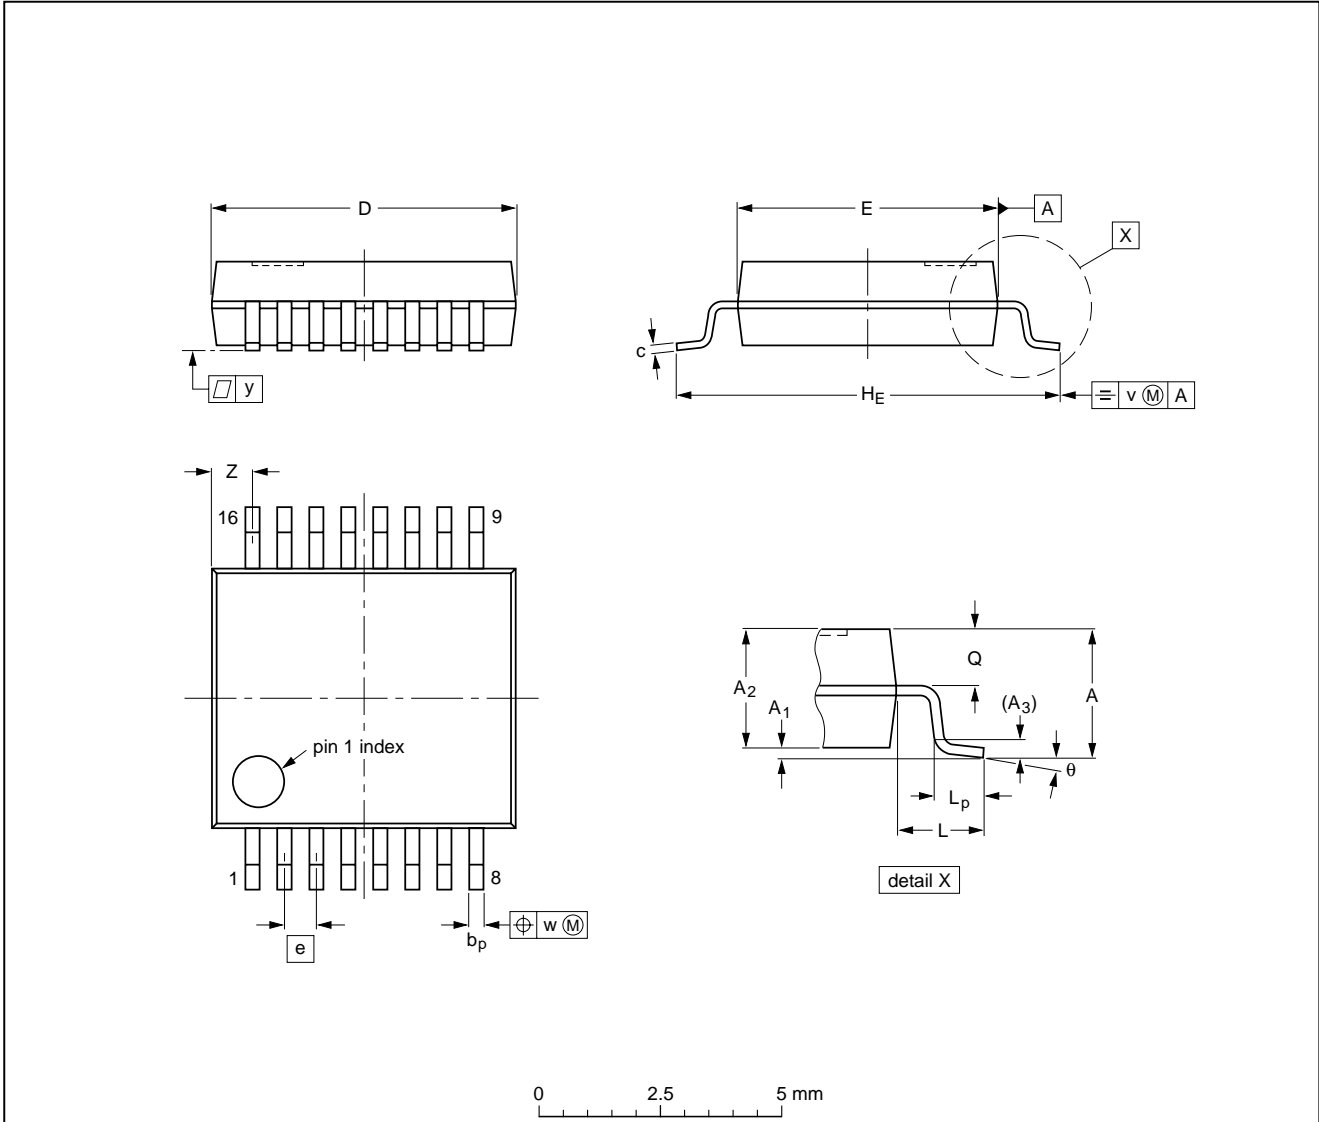

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	z ⁽¹⁾	θ
mm	2.0	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	6.4 6.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	1.00 0.55	8° 0°

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT338-1		MO-150AC				94-01-14 95-02-04

**4 N-channel 60 mΩ FET array
enhancement mode MOS transistors**

PHN405

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 34 Waterloo Road, NORTH RYDE, NSW 2113,
Tel. +61 2 9805 4455, Fax. +61 2 9805 4466

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213, Tel. +43 160 1010,
Fax. +43 160 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 689 211, Fax. +359 2 689 102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S,
Tel. +45 32 88 2636, Fax. +45 31 57 0044

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615800, Fax. +358 9 61580920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex,
Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 23 53 60, Fax. +49 40 23 536 300

Greece: No. 15, 25th March Street, GR 17778 TAVROS/ATHENS,
Tel. +30 1 4894 339/239, Fax. +30 1 4814 240

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: see Singapore

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Piazza IV Novembre 3,
20124 MILANO, Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKYO 108,
Tel. +81 3 3740 5130, Fax. +81 3 3740 5077

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Ul. Lukiska 10, PL 04-123 WARSZAWA,
Tel. +48 22 612 2831, Fax. +48 22 612 2327

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 1231,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 7430 Johannesburg 2000,
Tel. +27 11 470 5911, Fax. +27 11 470 5494

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 3 301 6312, Fax. +34 3 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 632 2000, Fax. +46 8 632 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2686, Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 6F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2865, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260,
Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Talatpasa Cad. No. 5, 80640 GÜLTEPE/ISTANBUL,
Tel. +90 212 279 2770, Fax. +90 212 282 6707

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 181 730 5000, Fax. +44 181 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 625 344, Fax. +381 11 635 777

For all other countries apply to: Philips Semiconductors,
International Marketing & Sales Communications, Building BE-p, P.O. Box 218,
5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 1998

SCA57

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

135108/00/03/pp12

Date of release: 1998 Mar 17

Document order number: 9397 750 03251

Let's make things better.

**Philips
Semiconductors**



PHILIPS