

# **STK0602UF**

N-Channel Enhancement-Mode MOSFET

### **Description**


• High speed switching application.

#### **Features**

- $\bullet$  High density cell design for low  $R_{\text{DS}(\text{ON})}.$
- Voltage controlled small signal switch
- Include Zener protection for ESD ruggedness.

### **Ordering Information**

Type NO.	Marking	Package Code	de	
STK0602UF	K62	SOT-323F		

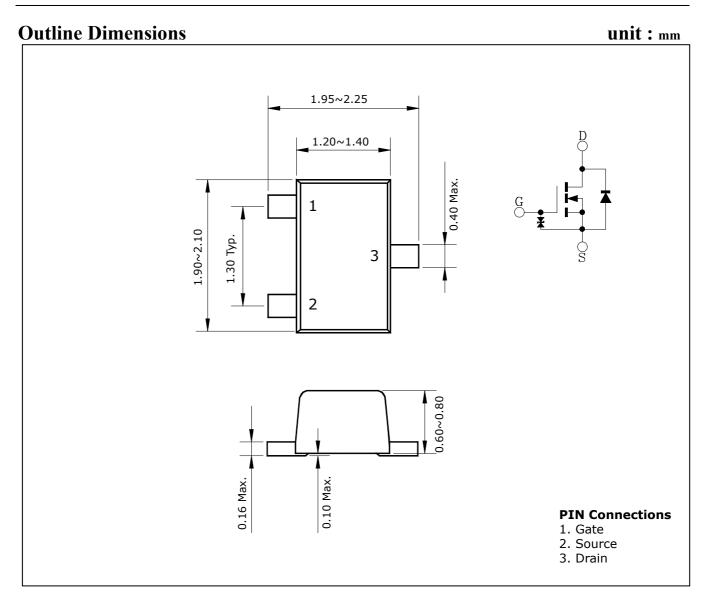

**Absolute maximum ratings** 

(Ta=25°C)


Characteristic	Symbol	Rating	Unit
Drain-Source voltage	$V_{DSS}$	60	V
Gate-Source voltage	$V_{GS}$	±8	V
Maximum Drain current	$I_{D}$	200	mA
Pulsed Drain Current	$I_{DP}$	800	mA
Drain Power dissipation	$P_D$	200	mW
Operating Junction and Storage temperature range	T <sub>J</sub> , T <sub>stg</sub>	-55~150	°C


## **Electrical Characteristics**


(Ta=25°C)


Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drian-Source breakdown voltage	$BV_{DSS}$	$I_D = 10 \mu A, V_{GS} = 0$	60	1	1	V
Gate-Threshold voltage	$V_{GS(th)}$	$I_D=1\mu A$ , $V_{DS}=5V$	0.8	1	1.8	V
Zero Gate voltage drain current	$I_{DSS}$	V <sub>DS</sub> =60V, V <sub>GS</sub> =0	-	-	1.0	μΑ
Gate-body leakage	$I_{GSS}$	$V_{DS}$ =0V, $V_{GS}$ =±6V	-	-	±1.0	μΑ
Drain-Source on-resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =5V, I <sub>D</sub> =10mA	-	2.5	6.0	Ω
		V <sub>GS</sub> =10V, I <sub>D</sub> =10mA	-	2.0	4.0	
Forward transconductance	$g_{fs}$	$V_{DS}$ =5V, $I_{D}$ =20mA	20	65	-	mS
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =5V, V <sub>GS</sub> =0, f=1MHz	-	26	-	pF
Output capacitance	C <sub>oss</sub>		-	20	-	
Reverse Transfer capacitance	$C_{rss}$		-	10	-	
Turn-on delay time	t <sub>d(on)</sub>	$V_{DD}$ =5V, $I_{D}$ =10mA $V_{GS}$ =5V $R_{L}$ =500 $\Omega$		150		
Rise time	t <sub>r</sub>			240		ns
Turn-off delay time	t <sub>d(off)</sub>		-	200	-	
Fall time	t <sub>f</sub>		_	300	-	


### **Electrical Characteristic Curves**

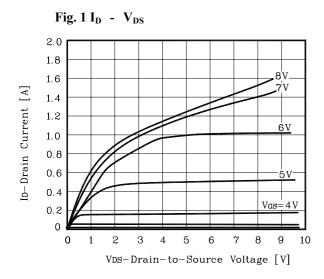


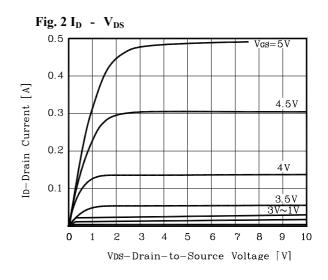

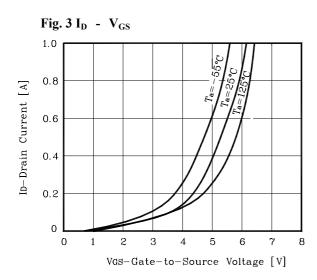

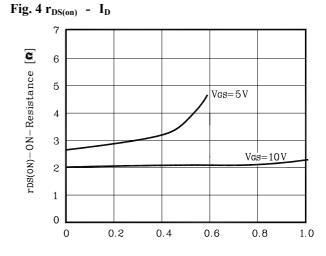

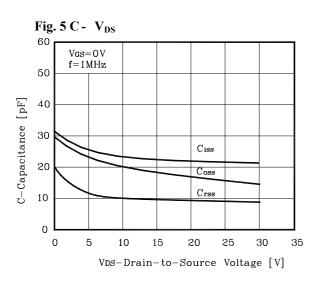

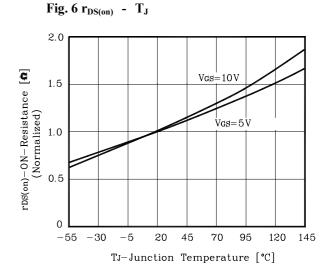

#### **Electrical Characteristic Curves**

Fig. 7  $r_{DS(on)}$  -  $V_{GS}$ 

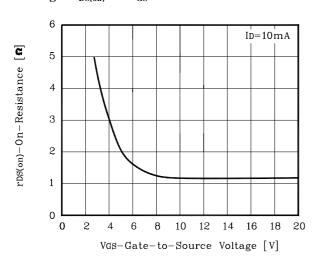


Fig. 8  $I_S$  -  $V_{SD}$ 


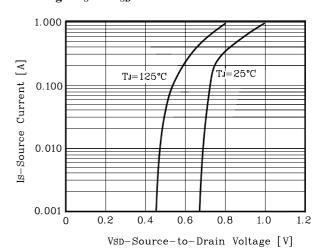


Fig. 9  $V_{GS(th)}$  -  $T_J$ 

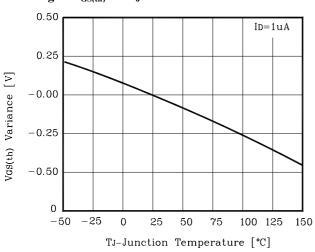

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.