

Silicon NPN Power Transistors

2SD1828

DESCRIPTION

- With TO-220F package
- Complement to type 2SB1226
- High DC current gain.
- Large current capacity and wide ASO.
- DARLINGTON

APPLICATIONS

- Motor drivers,printer hammer drivers,relay drivers,voltage regulator control.

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

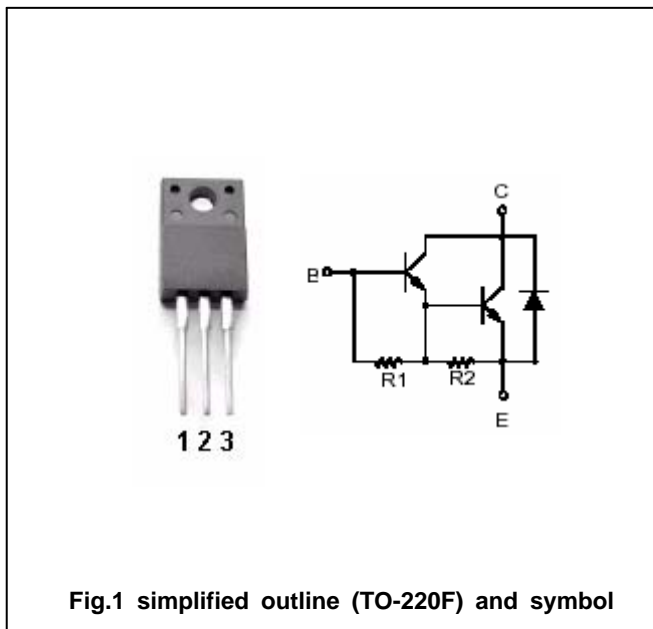


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25 )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	110	V
$V_{CEO}$	Collector-emitter voltage	Open base	100	V
$V_{EBO}$	Emitter-base voltage	Open collector	6	V
$I_C$	Collector current		3	A
$I_{CM}$	Collector current-peak		5	A
$P_C$	Collector dissipation	$T_C=25$	20	W
			2	
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-55~150	

## Silicon NPN Power Transistors

## 2SD1828

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CBO</sub>	Collector-base breakdown voltage	I <sub>C</sub> =5mA; I <sub>E</sub> =0	110			V
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =50mA; R <sub>BE</sub> =	100			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =1.5A; I <sub>B</sub> =3mA		0.9	1.5	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =1.5A; I <sub>B</sub> =3mA			2.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =80V; I <sub>E</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V; I <sub>C</sub> =0			3.0	mA
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =1.5A; V <sub>CE</sub> =3V	1500	4000		
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =1.5A; V <sub>CE</sub> =5V		20		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =500I <sub>B1</sub> =-500I <sub>B2</sub> =1A V <sub>CC</sub> =50V, R <sub>L</sub> =50		0.8		μs
t <sub>s</sub>	Storage time			5.0		μs
t <sub>f</sub>	Fall time			1.2		μs

Silicon NPN Power Transistors

2SD1828

PACKAGE OUTLINE

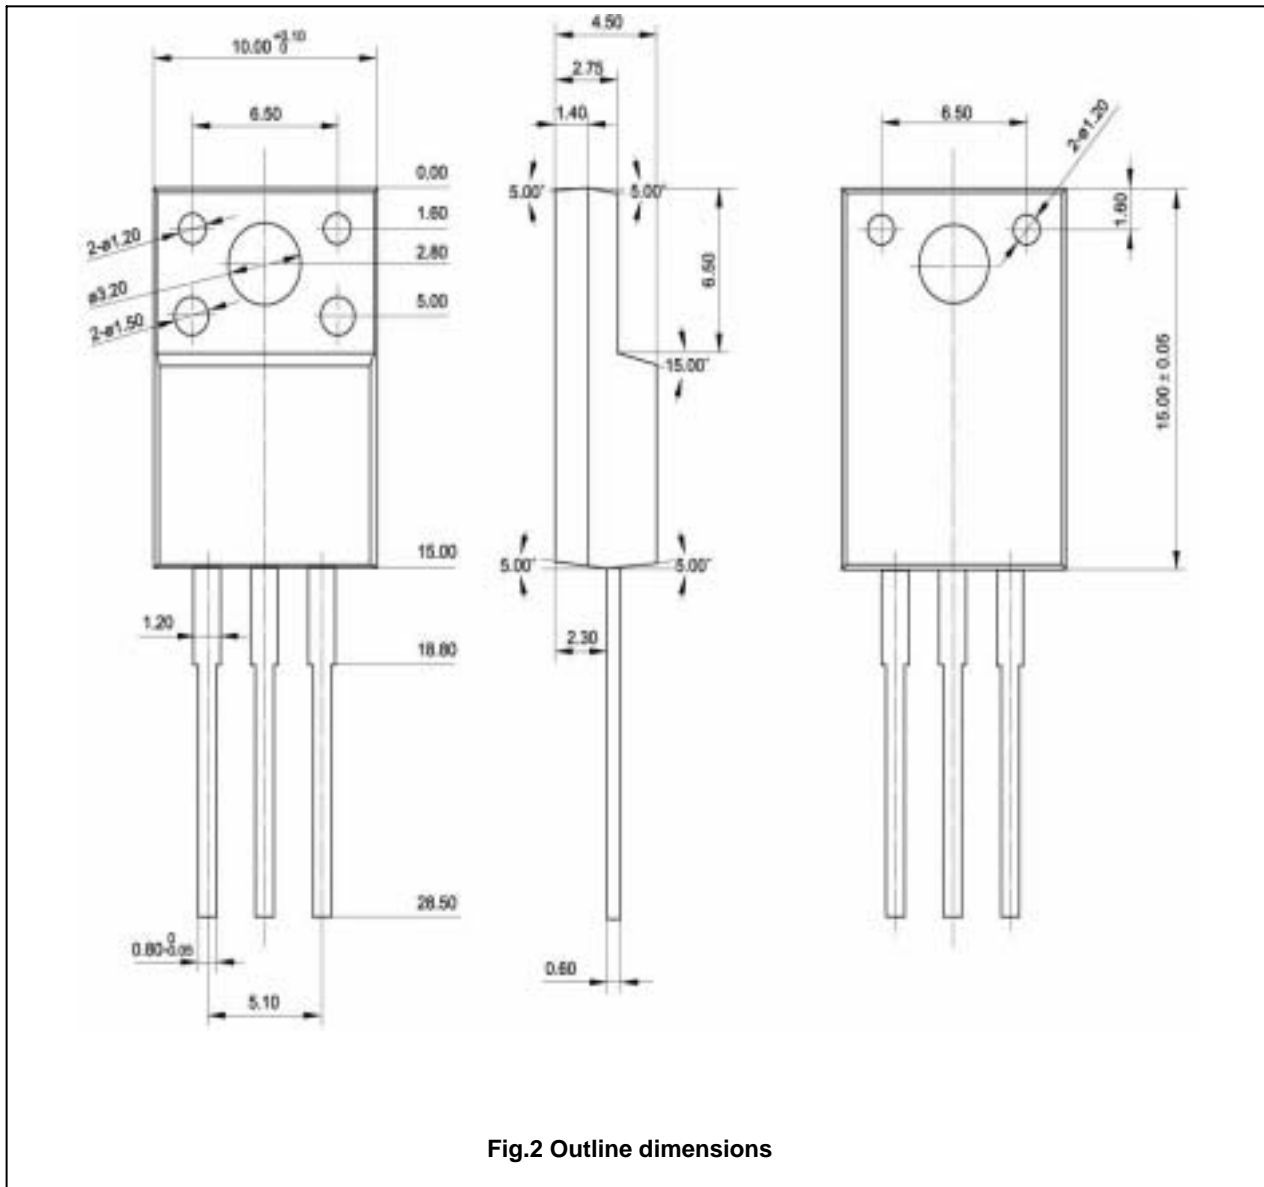


Fig.2 Outline dimensions