MABA-008124-CF1FA0



1:1 Flux Coupled Transformer

5 - 100 MHz

M/A-COM Products

Part Status: Released Rev V1

Features

- **Surface Mount**
- 1:1 Impedance
- CT on Secondary
- 75 Ohm
- **RoHS Compliant**

Description

M/A-COM's MABA-008124-CF1FA0 is a 1:1 RF flux coupled Transformer in a low cost surface mount package. Ideally suited for high volume CATV application.




Pin Configuration

Function	Pin Number		
Secondary	1		
Secondary CT	2		
Secondary Dot	3		
Primary Dot	4		
Primary	5		


Ordering Information

Part Number	Package			
MABA-008124-CF1FA0	900 pieces per reel			
MABA-008124-CF1FTB	Customer test board			

Schematic



Case Style SM-250-5

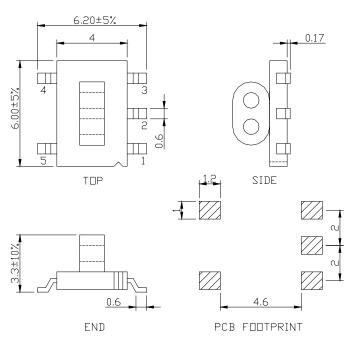

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, Except where otherwise stated.

- India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.
- China Tel: +86.21.2407.1588

MABA-008124-CF1FA0



1:1 Flux Coupled Transformer

5 - 100 MHz

M/A-COM Products

Part Status: Released Rev V1

Electrical Specifications: $T_A = 25$ °C, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Frequency Range	5 – 100 MHz				
Insertion Loss	5 – 100 MHz	dB	_	0.7	1.0
Amplitude Balance	5 – 100 MHz	dB	_	±0.0	±0.25
Phase Balance (ref value 180°)	5 – 100 MHz	0	_	±0.3	±4.0
Input Return Loss	5 – 75 MHz 75 – 100 MHz	dB dB	17 15	25 21	_

Absolute Maximum Ratings

Parameter	r Absolute Maximum		
RF Power	250mW		
DC Current	30mA		
Operating Temperature	-40°C to +75°C		
Storage Temperature	-40°C to +85°C		

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 • China Tel: +86.21.2407.1588 • India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.

MABA-008124-CF1FA0



1:1 Flux Coupled Transformer


5 - 100 MHz

M/A-COM Products


Part Status: Released Rev V1

Typical Performance: $T_A = 25^{\circ}C$, $Z_0 = 75\Omega$


Insertion Loss 1




Insertion Loss 2




Amplitude Balance



Phase Balance



Return Loss: Input



• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

• India Tel: +91.80.4155721

• China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.

changes to the product(s) or information contained herein without notice.