


TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC  
**TA79005SB, TA79006SB, TA79007SB, TA79008SB, TA79009SB, TA79010SB**  
**TA79012SB, TA79015SB, TA79018SB, TA79020SB, TA79024SB**

## 1 A THREE TERMINAL NEGATIVE VOLTAGE REGULATORS


**-5 V, -6 V, -7 V, -8 V, -9 V, -10 V, -12 V, -15 V, -18 V,  
-20 V, -24 V**

### FEATURES

- Suitable for CMOS, TTL, and the other Digital IC Power Supply
- Internal Thermal Overload Protecting
- Internal Short Circuit Current Limiting
- Output Current in Excess of 1.0 A
- Package in the plastic case TPL ( $P_D = 1.8 \text{ W}$ )

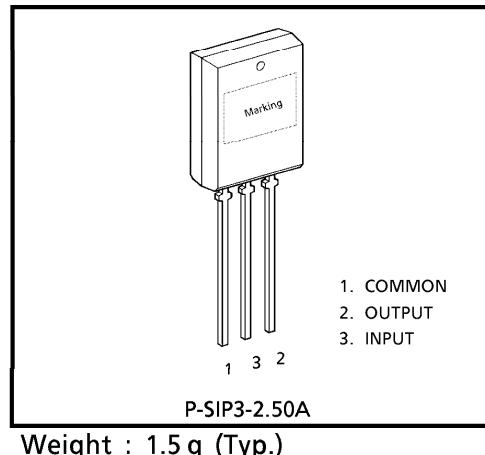

### EQUIVALENT CIRCUIT

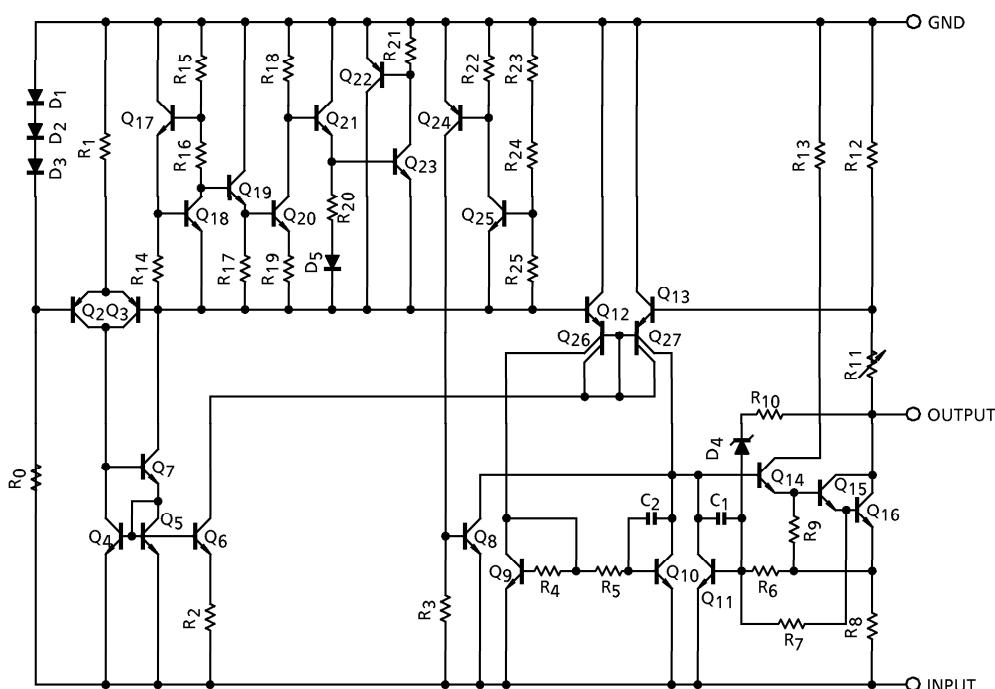

000707EBA2

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.

## MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT	
Input Voltage	TA79005SB	V <sub>IN</sub>	– 35	V	
	TA79006SB				
	TA79007SB				
	TA79008SB				
	TA79009SB				
	TA79010SB		– 40		
	TA79012SB				
	TA79015SB				
	TA79018SB				
	TA79020SB				
	TA79024SB				
Power Dissipation	(Ta = 25°C)	P <sub>D</sub>	1.8	W	
Operating Temperature		T <sub>opr</sub>	– 30~85	°C	
Storage Temperature		T <sub>stg</sub>	– 55~150	°C	
Junction Temperature		T <sub>j</sub>	150	°C	
Thermal Resistance		R <sub>th</sub> (j-a)	69.4	°C / W	

000707EBA2'

- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TA79005SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -10\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-5.2	-5.0	-4.8	V	
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-12\text{ V} \leq V_{IN} \leq -8\text{ V}$	—	7	50	
				$-25\text{ V} \leq V_{IN} \leq -7\text{ V}$	—	35	100	
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	11	100	
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	4	50	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-20\text{ V} \leq V_{IN} \leq -7\text{ V}$	-5.25	—	-4.75	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1		$-25\text{ V} \leq V_{IN} \leq -7\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.3	mA
				$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	40	—	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	63	70	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$		—	1.9	—	A
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$		—	2.0	—	V
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$		—	0.6	—	$\text{mV}/^\circ\text{C}$

TA79006SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -11\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-6.25	-6.0	-5.75	V	
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-13\text{ V} \leq V_{IN} \leq -9\text{ V}$	—	9	60	
				$-25\text{ V} \leq V_{IN} \leq -8\text{ V}$	—	43	120	
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	13	120	
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	5	60	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-21\text{ V} \leq V_{IN} \leq -8\text{ V}$	-6.3	—	-5.7	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$	—	4.3	8.0	mA	
Quiescent Current Change	$\Delta I_B$	1	$-25\text{ V} \leq V_{IN} \leq -8\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.3	mA	
				—	—	0.5		
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	45	—	$\mu\text{V}_{rms}$	
Ripple Rejection	R.R.	3	$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	61	68	—	dB	
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A	
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$	—	2.0	—	V	
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$	—	0.7	—	$\text{mV}/^\circ\text{C}$	

TA79007SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -12\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-7.28	-7.0	-6.72	V	
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-15\text{ V} \leq V_{IN} \leq -10\text{ V}$	—	10	70	
				$-25\text{ V} \leq V_{IN} \leq -9\text{ V}$	—	45	140	
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	20	140	
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	7	70	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-22\text{ V} \leq V_{IN} \leq -9\text{ V}$	-7.35	—	-6.65	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1		$-25\text{ V} \leq V_{IN} \leq -9\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.0	mA
		1		$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	49	—	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	60	67	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$		—	1.9	—	A
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$		—	2.0	—	V
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$		—	0.9	—	$\text{mV}/^\circ\text{C}$

TA79008SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -14\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-8.3	-8.0	-7.7	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-17\text{ V} \leq V_{IN} \leq -11\text{ V}$	—	11	80
				$-25\text{ V} \leq V_{IN} \leq -10.5\text{ V}$	—	47	160
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	26	160
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	9	80
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-23\text{ V} \leq V_{IN} \leq -10.5\text{ V}$ $5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$	-8.4	—	-7.6
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.3	8.0
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-25\text{ V} \leq V_{IN} \leq -10.5\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.0
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	52	—
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	59	66	—
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$		—	1.9	—
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$		—	2.0	—
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$		—	1.0	—
							$\text{mV}/^\circ\text{C}$

TA79009SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -15\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-9.3	-9.0	-8.7	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-19\text{ V} \leq V_{IN} \leq -13\text{ V}$	—	11	82
				$-26\text{ V} \leq V_{IN} \leq -11.5\text{ V}$	—	48	162
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	33	162
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	11	82
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-24\text{ V} \leq V_{IN} \leq -11.5\text{ V}$ $5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$	-9.4	—	-8.6
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.3	8.0
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-26.5\text{ V} \leq V_{IN} \leq -13\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.0
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	60	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	57	64	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$		—	1.9	—
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$		—	2.0	—
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$		—	1.1	$\text{mV}/^\circ\text{C}$

TA79010SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -16\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-10.4	-10	-9.6	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-20\text{ V} \leq V_{IN} \leq -14\text{ V}$	—	12	90
				$-27\text{ V} \leq V_{IN} \leq -12.5\text{ V}$	—	50	180
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	40	180
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	13	90
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-25\text{ V} \leq V_{IN} \leq -12.5\text{ V}$ $5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$	-10.5	—	-9.5
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.4	8.0
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-27.5\text{ V} \leq V_{IN} \leq -14\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.0
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	65	—
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	57	63	—
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$		—	1.9	—
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$		—	2.0	—
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$		—	1.3	—
							$\text{mV}/^\circ\text{C}$

TA79012SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -19\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-12.5	-12	-11.5	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-22\text{ V} \leq V_{IN} \leq -16\text{ V}$	—	13	120
				$-30\text{ V} \leq V_{IN} \leq -14.5\text{ V}$	—	55	240
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	46	240
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	17	120
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-27\text{ V} \leq V_{IN} \leq -14.5\text{ V}$	-12.6	—	-11.4
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$			
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-30\text{ V} \leq V_{IN} \leq -14.5\text{ V}$ , $T_j = 25^\circ\text{C}$	—	4.4	8.0
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	75	—	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3	$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	54	61	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$	—	2.0	—	V
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$	—	1.6	—	$\text{mV}/^\circ\text{C}$

TA79015SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -23\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-15.6	-15	-14.4	V	
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-26\text{ V} \leq V_{IN} \leq -20\text{ V}$	—	14	150	
				$-30\text{ V} \leq V_{IN} \leq -17.5\text{ V}$	—	57	300	
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	68	300	
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	25	150	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-30\text{ V} \leq V_{IN} \leq -17.5\text{ V}$	-15.75	—	-14.25	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$	—	4.4	8.0	mA	
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-30\text{ V} \leq V_{IN} \leq -17.5\text{ V}, T_j = 25^\circ\text{C}$	—	—	1.0	
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}, T_j = 25^\circ\text{C}$	—	—	0.5	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ\text{C}, I_{OUT} = 20\text{ mA}, 10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	90	—	$\mu\text{V}_{rms}$	
Ripple Rejection	R.R.	3	$f = 120\text{ Hz}, I_{OUT} = 20\text{ mA}, T_j = 25^\circ\text{C}$	53	60	—	dB	
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A	
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}, I_{OUT} = 1.0\text{ A}$	—	2.0	—	V	
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$	—	2.0	—	$\text{mV}/^\circ\text{C}$	

TA79018SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -27\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-18.7	-18	-17.3	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	-30 V $\leq V_{IN} \leq$ -24 V	—	25	180
				-33 V $\leq V_{IN} \leq$ -21 V	—	80	360
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq$ 1.5 A	—	110	360
				250 mA $\leq I_{OUT} \leq$ 750 mA	—	55	180
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-33 V $\leq V_{IN} \leq$ -21 V 5 mA $\leq I_{OUT} \leq$ 1.0 A	-18.85	—	-17.15
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$	—	4.5	8.0	mA
Quiescent Current Change	Line Load	$\Delta I_B$	1	-33 V $\leq V_{IN} \leq$ -21 V, $T_j = 25^\circ\text{C}$	—	—	1.0
			1	5 mA $\leq I_{OUT} \leq$ 1.0 A, $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	110	—	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3	$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	52	59	—	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$	—	2.0	—	V
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$	—	2.5	—	mV / °C

TA79020SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -30\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33\text{ }\mu\text{F}$ ,  $C_{OUT} = 0.1\text{ }\mu\text{F}$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-20.8	-20	-19.2	V
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-32\text{ V} \leq V_{IN} \leq -26\text{ V}$	—	28	180
				$-35\text{ V} \leq V_{IN} \leq -24\text{ V}$	—	104	360
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_{OUT} \leq 1.5\text{ A}$	—	130	360
				$250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$	—	70	180
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-35\text{ V} \leq V_{IN} \leq -24\text{ V}$ $5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$	-21.0	—	-19.0
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$		—	4.6	8.0
Quiescent Current Change	Line Load	$\Delta I_B$	1	$-36.5\text{ V} \leq V_{IN} \leq -25\text{ V}$ , $T_j = 25^\circ\text{C}$	—	—	1.0
			1	$5\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$	—	—	0.5
Output Noise Voltage	$V_{NO}$	2		$T_a = 25^\circ\text{C}$ , $I_{OUT} = 20\text{ mA}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	140	$\mu\text{V}_{rms}$
Ripple Rejection	R.R.	3		$f = 120\text{ Hz}$ , $I_{OUT} = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$	50	57	dB
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}$ , $I_{OUT} = 1.0\text{ A}$	—	2.0	—	V
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0\text{ mA}$	—	3.0	—	$\text{mV}/^\circ\text{C}$


TA79024SB

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN} = -33 V$ ,  $I_{OUT} = 500 \text{ mA}$ ,  
 $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ ,  $C_{IN} = 0.33 \mu\text{F}$ ,  $C_{OUT} = 0.1 \mu\text{F}$ )


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	-25.0	-24	-23.0	V	
Line Regulation	Reg·line	1	$T_j = 25^\circ\text{C}$	$-36 \text{ V} \leq V_{IN} \leq -30 \text{ V}$	—	31	240	
				$-38 \text{ V} \leq V_{IN} \leq -27 \text{ V}$	—	118	480	
Load Regulation	Reg·load	1	$T_j = 25^\circ\text{C}$	$5 \text{ mA} \leq I_{OUT} \leq 1.5 \text{ A}$	—	150	480	
				$250 \text{ mA} \leq I_{OUT} \leq 750 \text{ mA}$	—	85	240	
Output Voltage	$V_{OUT}$	1	$T_j = 25^\circ\text{C}$	$-38 \text{ V} \leq V_{IN} \leq -27 \text{ V}$	-25.2	—	-22.8	V
Quiescent Current	$I_B$	1	$T_j = 25^\circ\text{C}$	—	4.6	8.0	mA	
Quiescent Current Change	$\Delta I_B$	1	$-38 \text{ V} \leq V_{IN} \leq -27 \text{ V}, T_j = 25^\circ\text{C}$	—	—	1.0	mA	
				—	—	0.5	mA	
Output Noise Voltage	$V_{NO}$	2	$T_a = 25^\circ\text{C}, I_{OUT} = 20 \text{ mA}, 10 \text{ Hz} \leq f \leq 100 \text{ kHz}$	—	170	—	$\mu\text{V}_{rms}$	
Ripple Rejection	R.R.	3	$f = 120 \text{ Hz}, I_{OUT} = 20 \text{ mA}, T_j = 25^\circ\text{C}$	49	56	—	dB	
Short Circuit Current Limit	$I_{SC}$	1	$T_j = 25^\circ\text{C}$	—	1.9	—	A	
Dropout Voltage	$V_D$	1	$T_j = 25^\circ\text{C}, I_{OUT} = 1.0 \text{ A}$	—	2.0	—	V	
Average Temperature Coefficient Of Output Voltage	$T_{CVO}$	1	$I_{OUT} = 5.0 \text{ mA}$	—	3.5	—	$\text{mV} / ^\circ\text{C}$	

**TEST CIRCUIT**


1.  $V_{OUT}$ , Reg.line, Reg.load,  $I_B$ ,  $\Delta I_B$ ,  $V_D$ ,  $T_{CVO}$






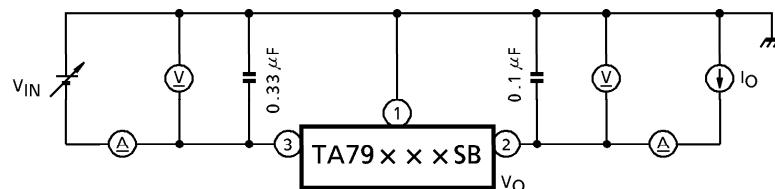






2.  $V_{NO}$

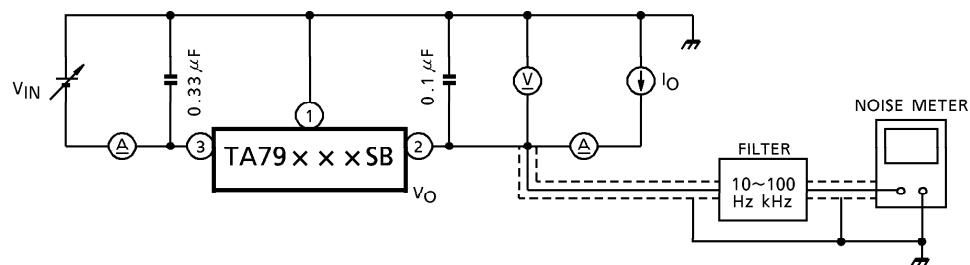

3. R.R.

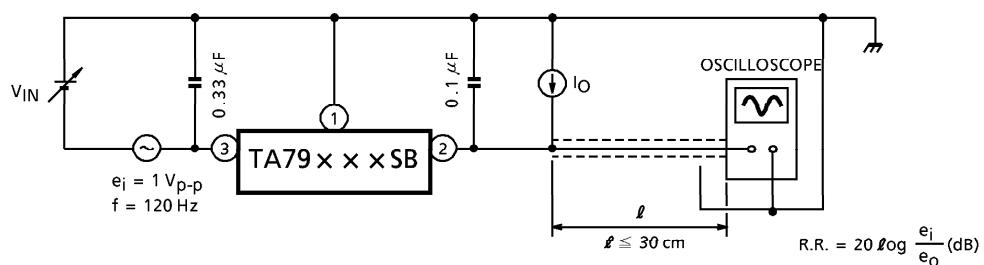

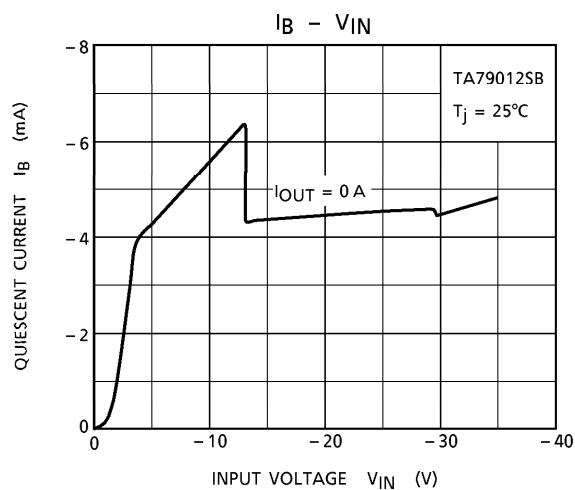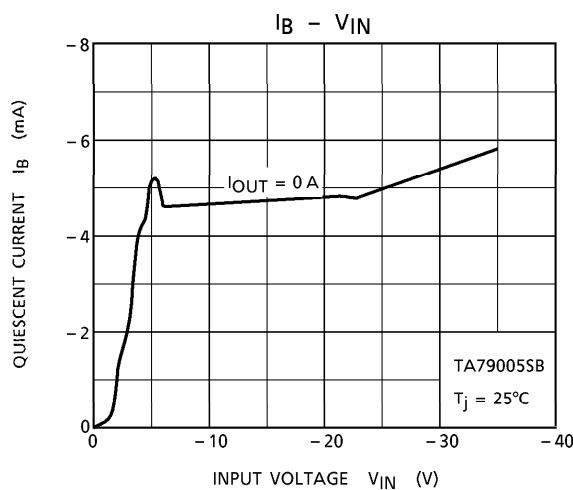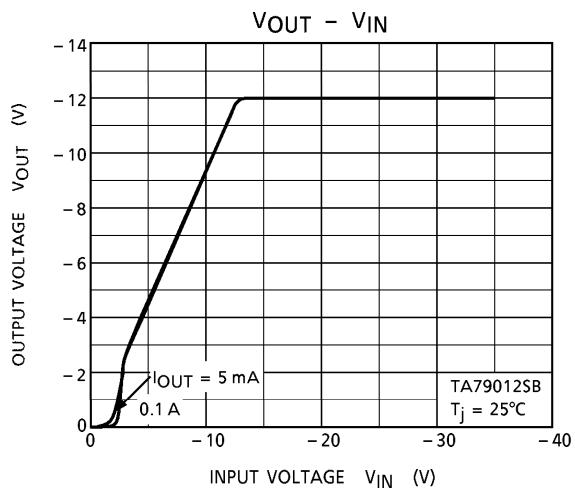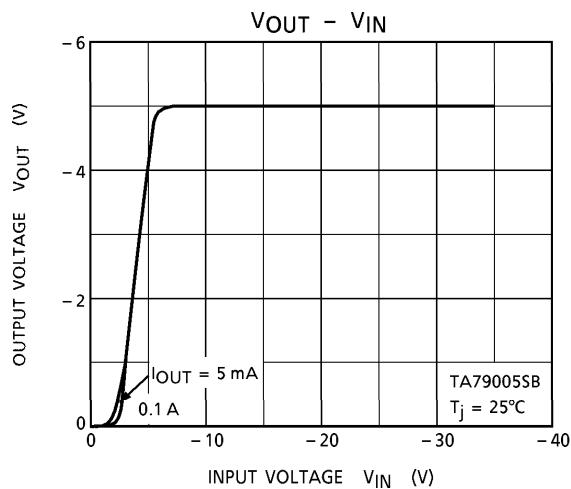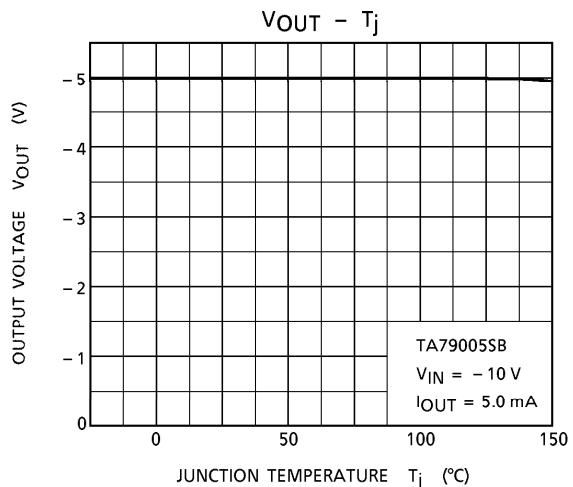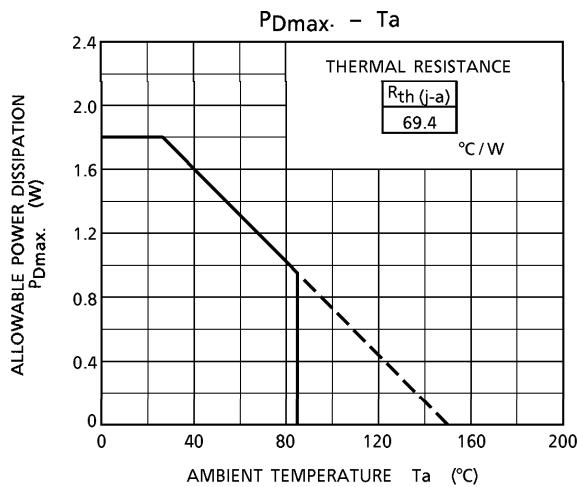


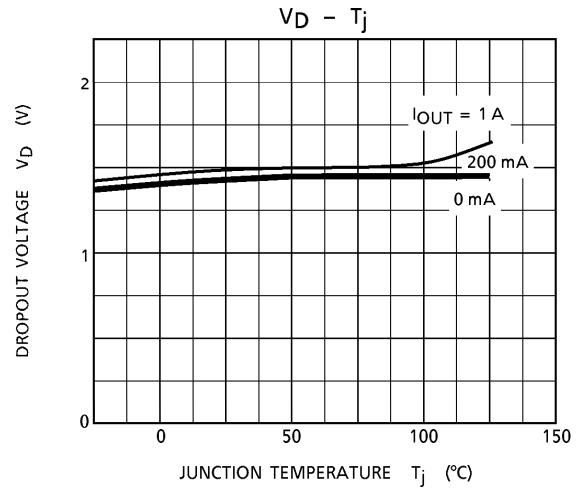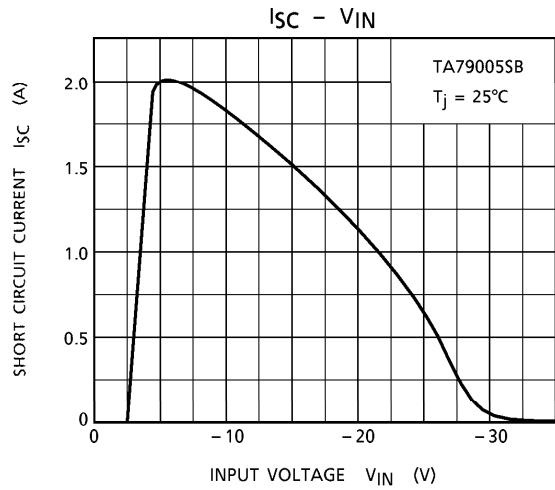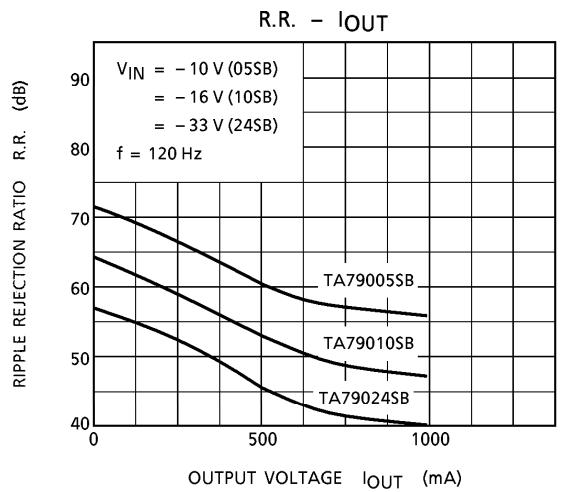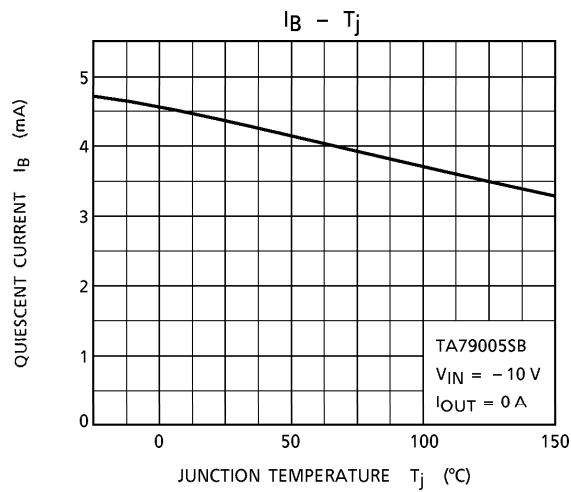

**PACKAGE DIMENSIONS**

P-SIP3-2.50A

Unit : mm

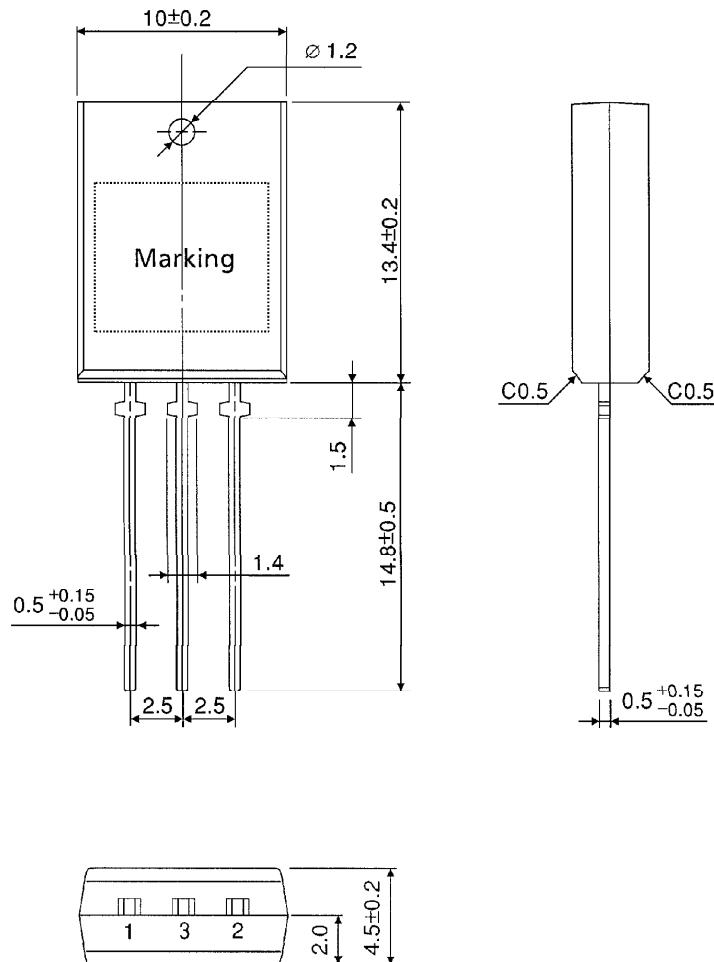

Weight : 1.5 g (Typ.)