


QUAD VIDEO DRIVER

■ GENERAL DESCRIPTION

The **NJM2577** is a quad video driver. The **NJM2577** includes LPF, 6dB amplifier and 75Ω Driver on all channels.

The **NJM2577** enable to control the Output Impedance. It is suitable for Video system for Europe.

■ PACKAGE OUTLINE




NJM2577M

■ FEATURES

- Operating Voltage $\pm 5V$
- Internal 6dB Amplifier
- Internal 75Ω Driver Circuit
- Quad 5th order Butter worth Low Pass Filter
- Internal High Impedance output control switch
- 41dB Stop Band Rejection at 27MHz
- Bipolar Technology
- Package Outline DMP20

■ FUNCTION BLOCK DIAGRAM

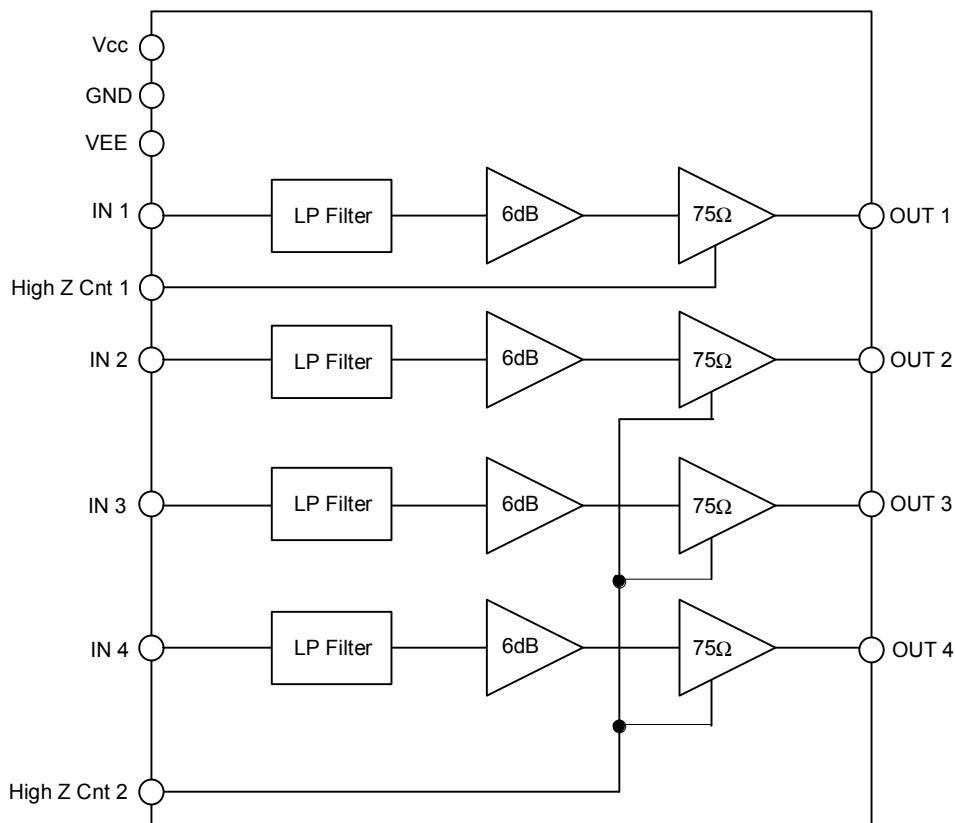

NJM2577

■ PIN CONFIGURATION

Output 1	1	OUT 1	High Z Cnt 1	20	High Impedance Control 1
Power Supply	2	VCC 1	High Z Cnt 2	19	High Impedance Control 2
Input 2	3	IN 2	NC	18	NC
Power Supply	4	VEE 1	IN 1	17	Input 1
GND	5	GND 1	GND	16	GND
Input 3	6	IN 3	VCC 2	15	Power Supply
Power Supply	7	VCC	VEE 2	14	Power Supply
Power Supply	8	VEE	OUT 2	13	Output 2
Input 4	9	IN 4	OUT 3	12	Output 3
GND	10	GND 2	OUT 4	11	Output 4

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC} /V _{EE}	±7.5	V
Power Dissipation	P _D	450 (Note)	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +125	°C

(Note) At on a board of EIA/JEDEC specification. (11.43 x 76.2 x 1.6mm Two layers, FR-4)

■ ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V _{CC} /V _{EE}		±4.5	±5.0	±5.5	V
Supply Current	I _{CC}	No Signal, No Load	20	30	39	mA

● VIDEO SYSTEM (Ta=25°C, V_{CC}=5.0V, V_{EE}=-5V, R_L=150Ω unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain	GV	Vin=1.0Vp-p 100kHz	6.0	6.4	6.8	dB
Frequency Response Characteristics	FBW	Vin=1.0Vp-p, 5MHz /100kHz	-1.0	0	1.0-	dB
Stop Band Rejection	Fsb	f=27MHz/100kHz, 1Vp-p	-35	-41	-	dB
-3dB Bandwidth	Fc		-	7.1	-	MHz
Gain matching level	Gm	Out2, Out3, Out4	-5	0	5	%
Total Harmonic Distortion	THD	f=1kHz, 1Vp-p input	-	0.1	-	%
Cross talk	CT	Vin=4.43MHz, 1.0Vp-p	-	-60	-	dB
Differential Gain	DG	Vin=1Vp-p, 10step Stairs-signal	-	0.4	-	%
Differential Phase	DP	Vin=1Vp-p, 10step Stairs-signal	-	0.4	-	deg
Input Impedance	Rin	All Channel	-	50	-	KΩ
Output Impedance	Ro1	High Z Cont="0"	10	20	-	KΩ
Output Impedance	Ro2	High Z Cont="1"	-	45	-	mΩ
Equivalent Output Capacitance	Co	High Z Cont="0"	-	3	-	pF
Group Delay	Tpd	Vin=1Vp-p, 100kHz	-	70	-	nS

● SWITCH CONTROL (Ta=25°C, V_{CC}=5.0V, V_{EE}=-5V, R_L=150Ω unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
High Z Control Logic-High level	Vihz		2.0	-	-	V
High Z Control Logic-Low level	Vilz		-	-	0.8	V





● SWITCH CONTROL TABLE



Control Signal	Outputs Impedance
0*	High Impedance
1	Through

* : Default setting


NJM2577

■ PIN DESCRIPTION

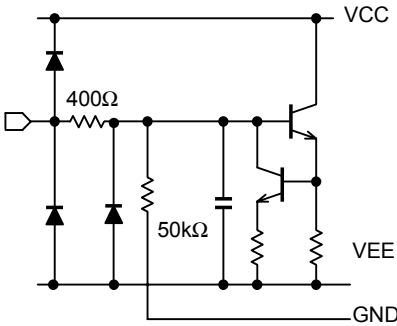
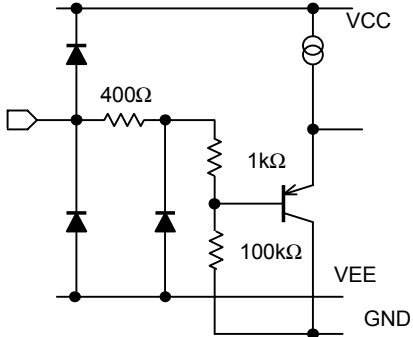

PIN No.	SYMBOL	INSIDE EQUIVALENT CIRCUIT	VOLTAGE
1 11 12 13	OUT1 OUT3 OUT4 OUT2		0V
3 6 9 17	IN2 IN3 IN4 IN1		0V
19 20	HighZCnt1 HighZCnt2		0V
2 7 15	Vcc1 Vcc Vcc2		+5V

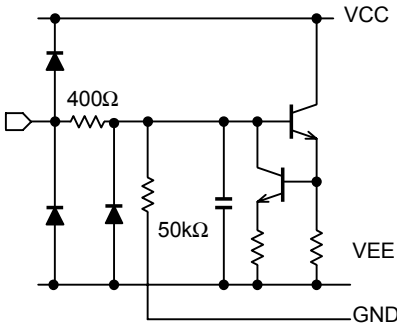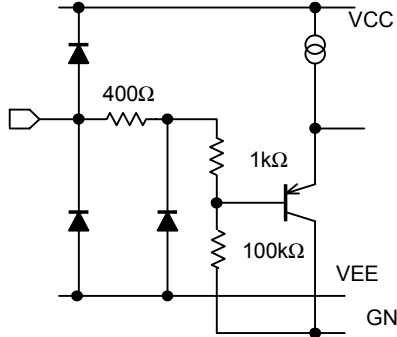PIN No.	SYMBOL	INSIDE EQUIVALENT CIRCUIT	VOLTAGE
5 10 16	GND1 GND2 GND		0V
4 8 14	VEE1 VEE VEE2		-5V

■ TEST CIRCUIT

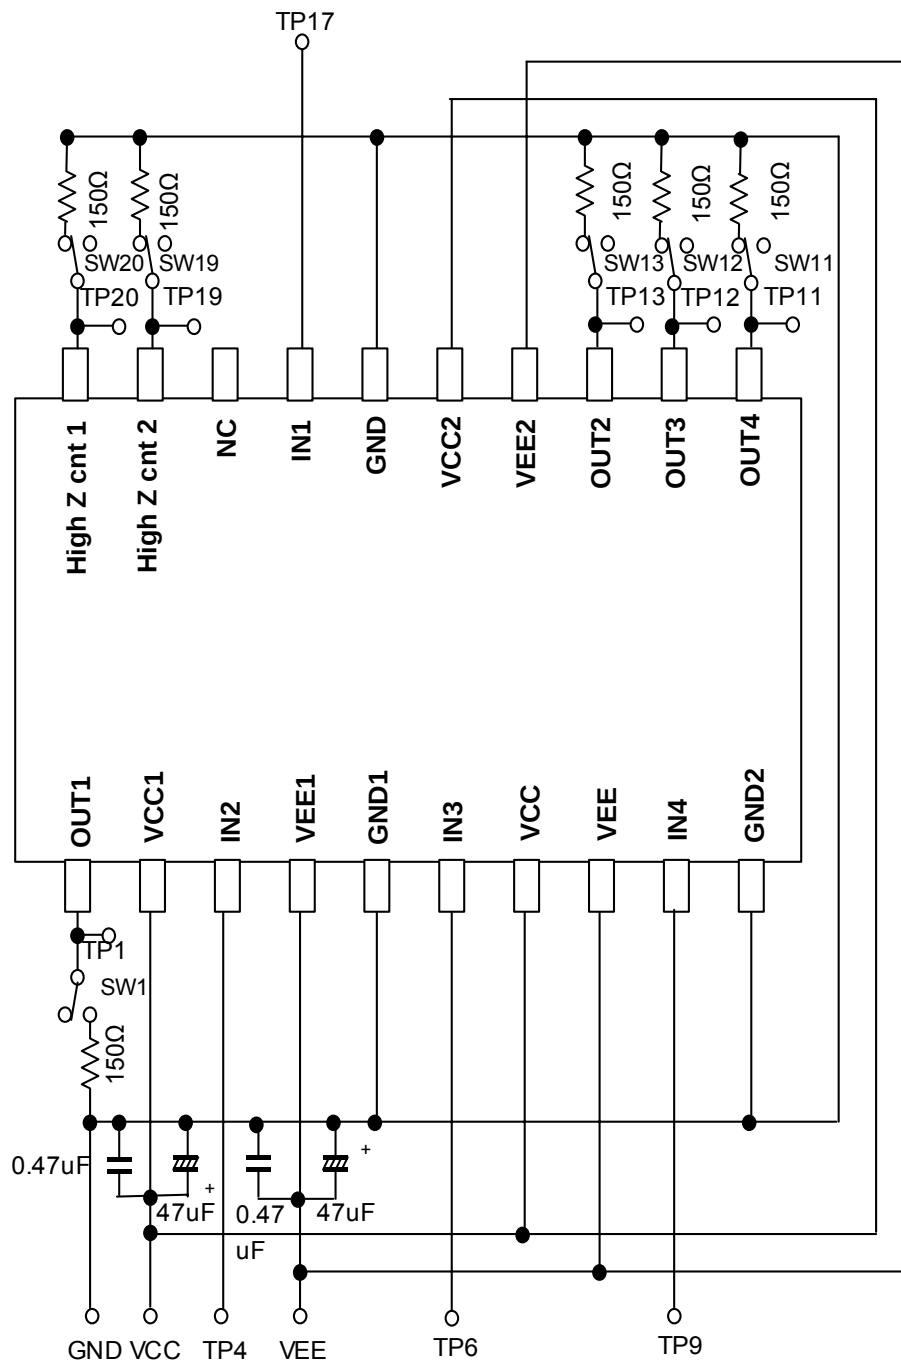

■ TYPICAL CHARACTERISTICS

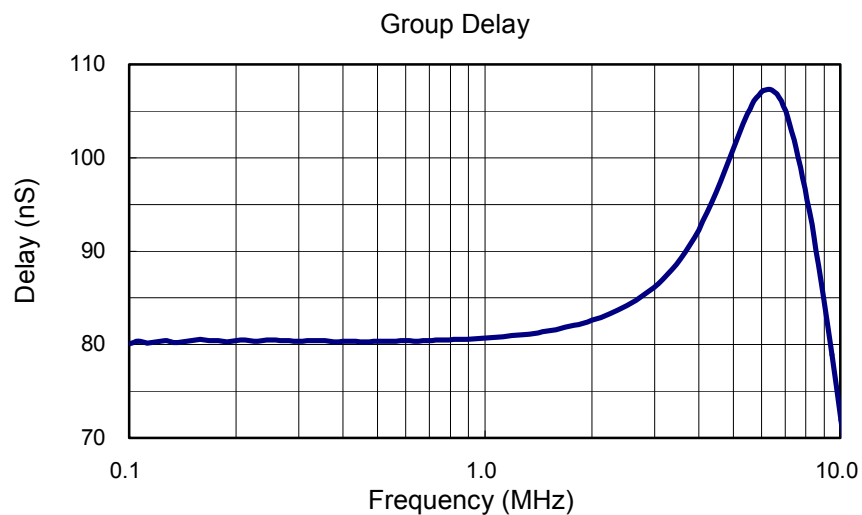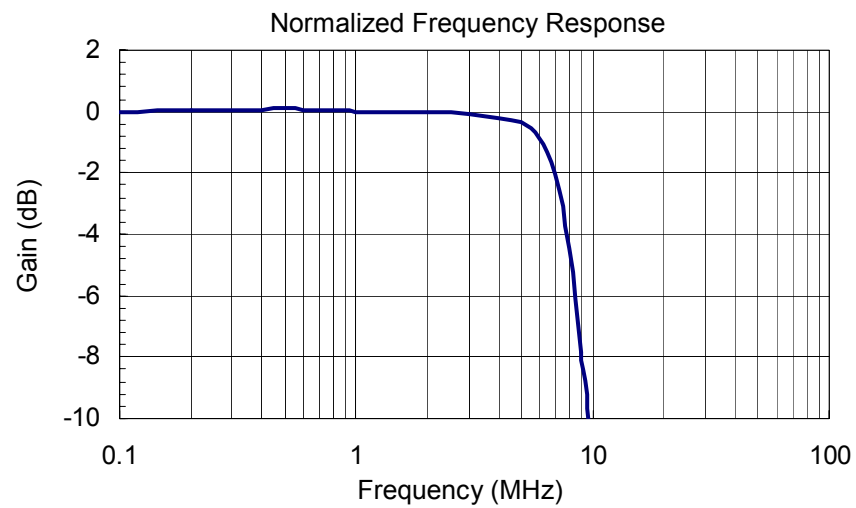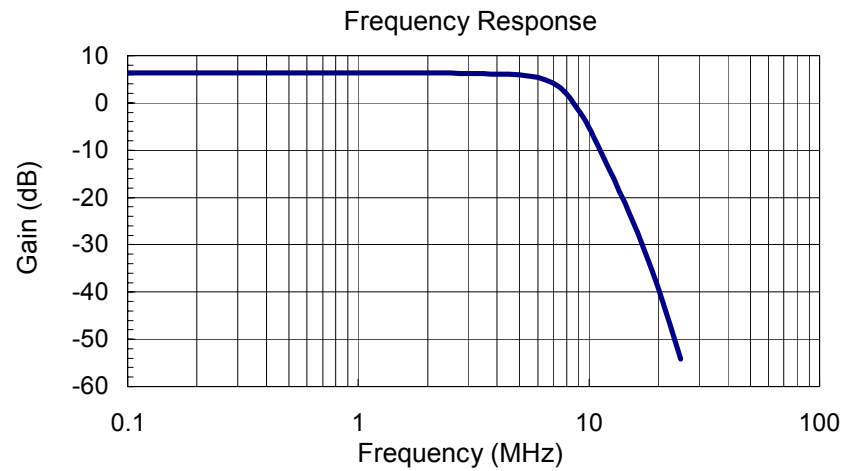

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.