### **Technical Data Sheet**

**EVERLIGHT** 

## Light Emitting Diode (5 mm Round LED, T-1 3/4)

### Features

- Popular T-1 3/4 diameter package.
- Choice of various viewing angles.
- Available on tape and reel.
- Reliable and robust.
- ESD-withstand voltage: up to 4KV
- The product itself will remain within RoHS compliant version.
- UV resistant epoxy

#### Descriptions

- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors, intensities, epoxy colors, etc.
- Superior performance in outdoor environment.

#### Applications

- Single or Dual Color Graphic Signs
- Message boards
- Variable message signs (VMS)
- Commercial outdoor advertising

#### **Device Selection Guide**

	C			
LED Part No.	Material	<b>Emitted Color</b>	Lens Color	
333/Y2C1-ASWB	AlGaInP	Hyper Yellow	Water clear	

Everlight Electronics Co., Ltd. Device Number : DLE-033-B02 http\\:www.everlight.com Prepared date: 01-18-2006



Rev 1 Page: 1 of 7 Prepared by: Flourix Chen


## **Technical Data Sheet**

# Light Emitting Diode (5 mm Round LED, T-1 3/4)

# 333/Y2C1-ASWB

#### **Package Dimensions**

**EVERLIGHT** 

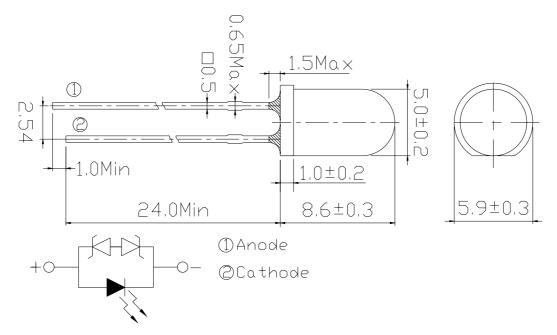

#### Notes:

- All dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Lead spacing is measured where the lead emerges from the package.
- Protruded resin under flange is 1.5mm Max LED.

### Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units	
Forward Current	I <sub>F</sub>	50	mA	
Pulse Forward Current <sup>*1</sup>	I <sub>FP</sub>	160	mA	
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C	
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C	
Soldering Temperature <sup>*2</sup>	T <sub>sol</sub>	260 ±5	°C	
Power Dissipation	P <sub>d</sub>	120	mW	
Reverse Voltage	Vr	5	V	
Zener Reverse Current	Iz	100	mA	
Electrostatic Discharge	ESD	4K	V	

Notes: \*1:I<sub>FP</sub> Conditions--Pulse Width  $\leq$  10msec and Duty  $\leq$  1/10.

\*2:Soldering time  $\leq$  5 seconds.

http\\:www.everlight.com Prepared date: 01-18-2006

### **Technical Data Sheet**

EVERLIGHT

# Light Emitting Diode (5 mm Round LED, T-1 3/4)

### 333/Y2C1-ASWB

Parameter	Symbol	Condition	Min.	Тур.	Max.	Units
Forward Voltage	$V_{\mathrm{F}}$	I <sub>F</sub> =20mA	1.8		2.6	V
Zener Reverse Voltage	Vz	Iz=5mA	5.2			V
Luminous Intensity	$I_V$	I <sub>F</sub> =20mA	5650		18000	mcd
Viewing Angle	2 <del>0</del> 1/2	I <sub>F</sub> =20mA		15		deg
Peak Wavelength	λp	I <sub>F</sub> =20mA		591		nm
Dominant Wavelength	λd	I <sub>F</sub> =20mA		589		nm
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	50			$\mu A$
Spectrum Radiation Bandwidth	Δλ	I <sub>F</sub> =20mA		15		nm

### Electro-Optical Characteristics (Ta=25°C)

#### Rank Combination (I<sub>F</sub>=20mA)

5650~7150				W		
5050~7150	7150~9000	9000~11250	11250~14250	14250~18000		
*Measurement Uncertainty of Luminous Intensity: ±15% Unit:mcd						
1	2		3	4		
1.8~2.0	2.0~2	.2 2.	2~2.4	2.4~2.6		
*Measurement Uncertainty of Forward Voltage: ±0.1V				Unit:V		
	1		2			
5	86~590		590~594			
*Measurement Uncertainty of Dominant Wavelength ±1.0nm Unit:				Unit:nm		
(	of Luminous Int 1 1.8~2.0 of Forward Volt 5	$ \begin{array}{c c}     1 & 2 \\     \hline     1.8 \sim 2.0 & 2.0 \sim 2 \\     \hline     0 f Forward Voltage: \pm 0.1V \\     \hline     1 \\     586 \sim 590 \\ \end{array} $	1       2         1       2         1.8~2.0       2.0~2.2       2.         of Forward Voltage: $\pm 0.1V$ 1         1       586~590	1       2       3         1       2       3         1.8~2.0       2.0~2.2       2.2~2.4         of Forward Voltage: $\pm 0.1V$ 2         1       2         586~590       590~594		

Everlight Electronics Co., Ltd. Device Number : DLE-033-B02 http\\:www.everlight.com Prepared date: 01-18-2006 Rev 1 Page: 3 of 7 Prepared by: Flourix Chen

Forward Current vs Voltage

2.4

Ħ

10°

10° 0°

> 0. 2 0.4 0. 6

Forward Voltage(Vp-volts

2.8 3.0

Τα=25°

10

I<sub>F</sub>(mA)

20º Ta=25°

30°

40°

50

60° 70°

80° 90'

Forward

1.6

f=1KHz 目 Dut<u>y=1/10</u> 2.0

Luminous Intensity vs

Forward Current

10<sup>1</sup>

0.30.1

0. 5

Forward Current

Radiation Diagram

### **Technical Data Sheet**


**EVERLIGHT** 

## Light Emitting Diode (5 mm Round LED, T-1 3/4)


# 333/Y2C1-ASWB

Ta=25°

### **Typical Electro-Optical Characteristics Curves**

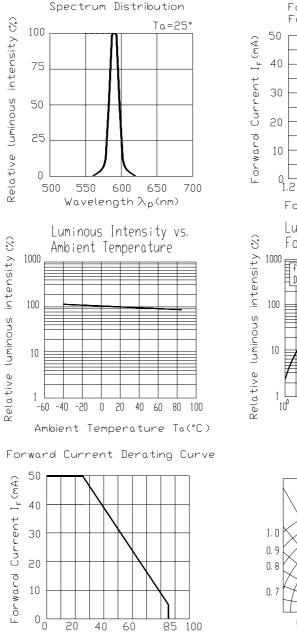

Ambient Temperature Ta(°C)



Everlight Electronics Co., Ltd. Device Number : DLE-033-B02

http\\:www.everlight.com Prepared date: 01-18-2006



### **Technical Data Sheet**

# Light Emitting Diode (5 mm Round LED, T-1 3/4)

# 333/Y2C1-ASWB

### Label Form Specification



CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks of Luminous and Forward Voltage HUE: Ranks of Dominant Wavelength REF: Reference LOT No: Lot Number MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. Device Number : DLE-033-B02 http\\:www.everlight.com Prepared date: 01-18-2006

Rev 1 Page: 5 of 7 Prepared by: Flourix Chen

### **Technical Data Sheet**


**EVERLIGHT** 

# Light Emitting Diode (5 mm Round LED, T-1 3/4)

# 333/Y2C1-ASWB

#### Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up.



Everlight Electronics Co., Ltd. Device Number : DLE-033-B02 http\\:www.everlight.com Prepared date: 01-18-2006

Rev 1 Page: 6 of 7 Prepared by: Flourix Chen

### **Technical Data Sheet**

# Light Emitting Diode (5 mm Round LED, T-1 3/4)

# 333/Y2C1-ASWB

#### 6. Soldering Condition

**EVERLIGHT** 

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.	
		Distance	3mm Min.	

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http:\\www.everlight.com* 

Everlight Electronics Co., Ltd. Device Number : DLE-033-B02 http\\:www.everlight.com Prepared date: 01-18-2006 Rev 1 Page: 7 of 7 Prepared by: Flourix Chen