


### SOD-323

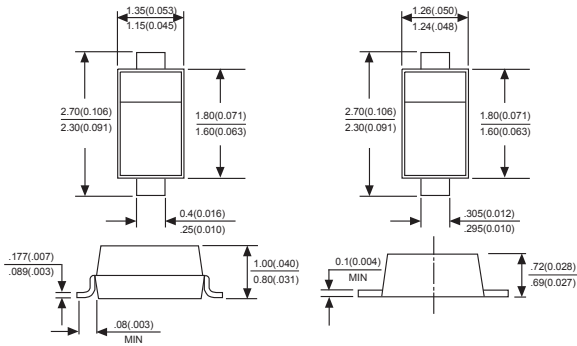

### FEATURES

- ◆ For use in low voltage, high frequency inverters
- ◆ Free wheeling, and polarity protection applications

### MECHANICAL DATA

**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Marking:** B5817W:SJ, B5818W:SK, B5819W:SL

### Maximum ratings and electrical characteristics, Single diode @T<sub>A</sub>=25°C

PARAMETER	SYMBOLS	B5817WS	B5818WS	B5819WS	UNITS
Peak repetitive peak reverse voltage Working peak	V <sub>RRM</sub>				V
DC Blocking voltage	V <sub>R</sub>	20	30	40	
RMS Reverse voltage	V <sub>R(RMS)</sub>	14	21	28	
Average rectified output current	I <sub>o</sub>	1			A
Peak forward surge current @=8.3ms	I <sub>FSM</sub>	25			A
Repetitive peak forward current	I <sub>FRM</sub>	625			mA
Power dissipation	P <sub>d</sub>	200			mW
Thermal resistance junction to ambient	R <sub>θJA</sub>	625			K/W
Storage temperature	T <sub>STG</sub>	-65 to +150			°C
Non-Repetitive peak reverse voltage	V <sub>RM</sub>	20	30	40	V

### Electrical ratings @T<sub>A</sub>=25°C

PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions	
Reverse breakdown voltage	V <sub>(BR)</sub>	20		V	I <sub>R</sub> =1mA	B5817WS
		30		V		B5818WS
		40		V		B5819WS
Reverse voltage leakage current	I <sub>R</sub>		1	mA	V <sub>R</sub> =20V	B5817WS
					V <sub>R</sub> =30V	B5818WS
					V <sub>R</sub> =40V	B5819WS
Forward voltage	V <sub>F</sub>		0.45	V	I <sub>F</sub> =1A I <sub>F</sub> =3A	B5817WS
			0.75			
			0.55	V		B5818WS
	0.875		B5819WS			
Diode capacitance	C <sub>D</sub>		0.6	V	V <sub>R</sub> =4V, f=1.0MHz	
			0.9			

# RATINGS AND CHARACTERISTIC CURVES B5817WS-B5819WS

FIG. 1- FORWARD CURRENT DERATING CURVE

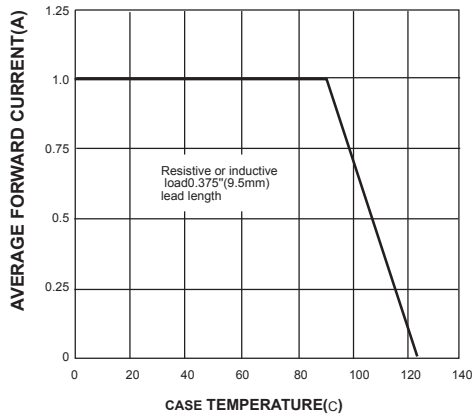


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

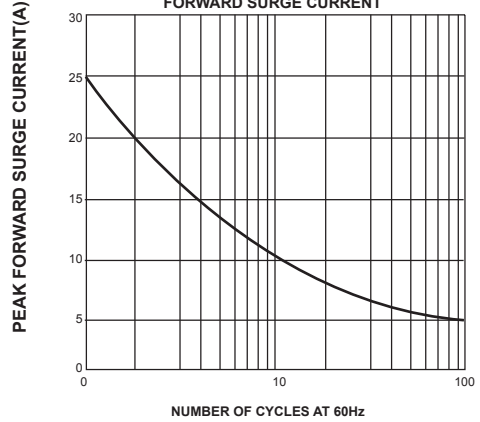


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

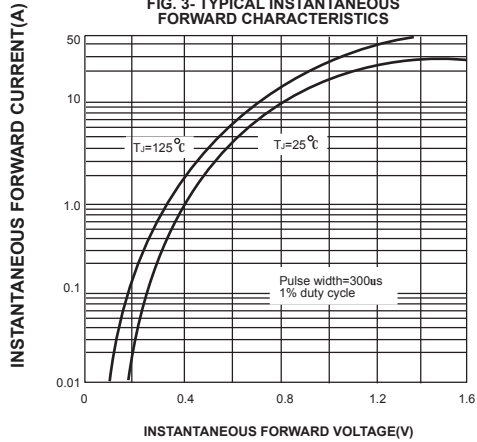


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

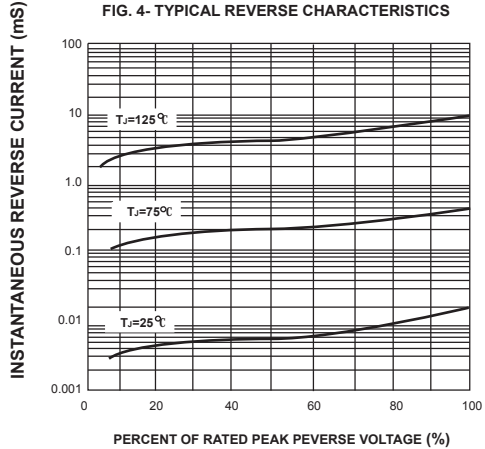


FIG. 5- TYPICAL JUNCTION CAPACITANCE

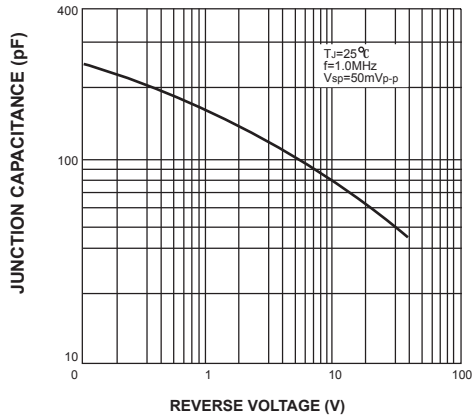


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

