




PACKAGE OUTLINE

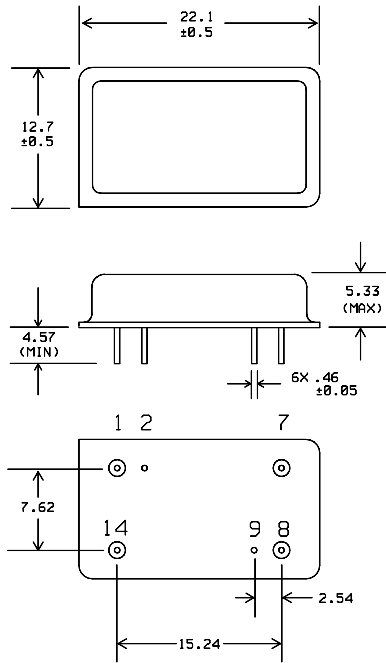


Units: mm

Pin Configuration:

- Input: 1
- Input Return: 14
- Output: 8
- Output Return: 7
- Ground: 2, 9

MATCHING CIRCUIT

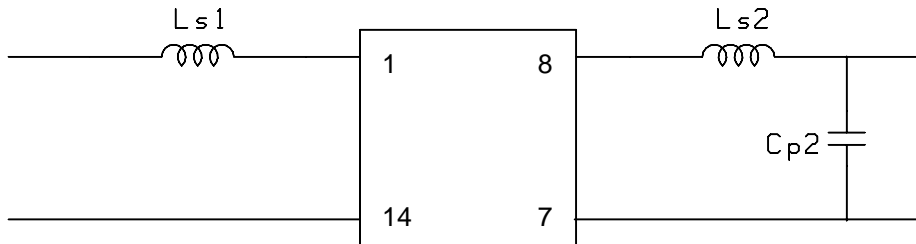

Typical component values:
(Minimum inductor Q = 40)

$L_{s1} = 330$ nH

$L_{s2} = 470$ nH

$C_{p2} = 51$ pF

Notes

- Maximum 2% tolerance matching components shall be used.
- Tuning values shown are for reference only. Optimum values may change depending upon board layout.

ISO 9001
Registered