


## Coupled Inductors-MSD1278 For Flyback, SEPIC and other Applications




Tight coupling ( $k \ge 0.94$ ) and 500 V isolation make the MSD1278 series of coupled inductors ideal for use in a variety of circuits including flyback, multi-output buck and SEPIC.

These inductors provide high inductance, high efficiency and excellent current handling in a rugged, low cost part.

They can also be used as two single inductors connected in series or parallel or as a common mode choke.

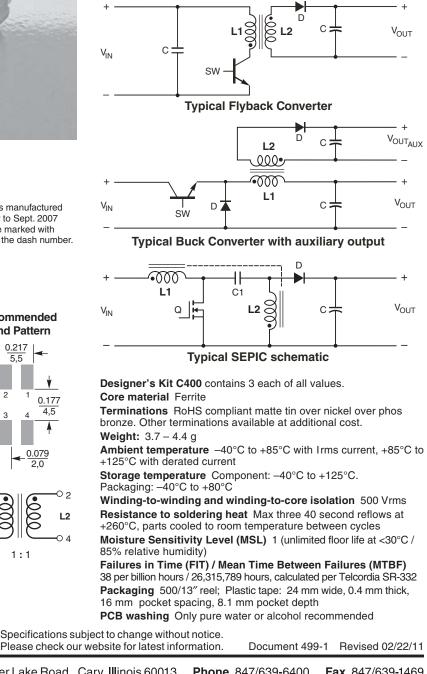




<u>0.19</u>7 5.0 0.138 0.197 5,0 0.059 1.5

\* For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.012 inch (0.3 mm)





3 C 1:1

# Dimensions are in $\frac{inches}{mr}$

Phone 847/639-6400 Fax 847/639-1469 1102 Silver Lake Road Cary, Illinois 60013 E-mail info@coilcraft.com Web http://www.coilcraft.com



## Coupled Inductors – MSD1278 Series

Part number <sup>1</sup>				Coupling	Leakage		Irms(A)	
	Inductance <sup>2</sup> (µH)	DCR max <sup>3</sup> (Ohms)	SRF typ <sup>4</sup> (MHz)	coefficient typ	inductance⁵ typ (µH)	Isat <sup>6</sup> (A)	both windings <sup>7</sup>	one winding <sup>8</sup>
MSD1278-472ML_	4.7 ±20%	0.038	32.0	0.94	0.22	14.9	3.16	4.47
MSD1278-562ML_	5.6 ±20%	0.046	25.0	0.94	0.23	13.4	2.87	4.06
MSD1278-682ML_	6.8 ±20%	0.048	24.0	0.94	0.22	13.1	2.81	3.98
MSD1278-822ML_	8.2 ±20%	0.050	18.0	0.94	0.34	10.8	2.76	3.90
MSD1278-103ML_	10 ±20%	0.058	16.5	0.94	0.34	10.5	2.56	3.62
MSD1278-123ML_	12 ±20%	0.062	14.5	0.94	0.36	9.6	2.48	3.50
MSD1278-153ML_	15 ±20%	0.072	11.8	0.94	0.41	9.1	2.30	3.25
MSD1278-183ML_	18 ±20%	0.080	10.5	0.94	0.37	8.0	2.18	3.08
MSD1278-223ML_	22 ±20%	0.096	9.0	0.94	0.41	6.8	1.99	2.81
MSD1278-273ML_	27 ±20%	0.120	8.4	0.94	0.43	6.5	1.78	2.52
MSD1278-333ML_	33 ±20%	0.150	7.6	0.94	0.56	5.6	1.59	2.25
MSD1278-393ML_	39 ±20%	0.160	6.5	0.94	0.64	5.5	1.54	2.18
MSD1278-473ML_	47 ±20%	0.180	6.0	0.94	0.70	5.2	1.45	2.05
MSD1278-563ML_	56 ±20%	0.190	5.6	0.98	0.76	4.5	1.41	2.00
MSD1278-683ML_	68 ±20%	0.210	5.0	0.98	0.88	4.1	1.35	1.90
MSD1278-823ML_	82 ±20%	0.280	4.1	0.98	0.85	3.8	1.16	1.65
MSD1278-104ML_	100 ±20%	0.300	3.6	0.98	0.90	3.4	1.13	1.59
MSD1278-124KL_	120 ±10%	0.410	3.2	0.98	1.31	3.2	0.96	1.36
MSD1278-154KL_	150 ±10%	0.460	3.0	0.98	1.46	2.8	0.91	1.29
MSD1278-184KL_	180 ±10%	0.510	2.7	0.98	0.93	2.5	0.86	1.22
MSD1278-224KL_	220 ±10%	0.690	2.5	0.98	1.54	2.3	0.74	1.05
MSD1278-274KL_	270 ±10%	0.900	2.1	0.98	1.17	2.1	0.65	0.92
MSD1278-334KL_	330 ±10%	1.02	2.0	0.98	4.14	1.9	0.61	0.86
MSD1278-394KL_	390 ±10%	1.12	1.8	0.98	1.64	1.7	0.58	0.82
MSD1278-474KL_	470 ±10%	1.43	1.6	0.98	0.25	1.6	0.50	0.70
MSD1278-564KL_	560 ±10%	1.69	1.5	0.98	2.68	1.5	0.47	0.67
MSD1278-684KL_	680 ±10%	2.29	1.4	0.98	2.11	1.3	0.41	0.58
MSD1278-824KL_	820 ±10%	2.55	1.3	0.98	2.39	1.2	0.39	0.55
MSD1278-105KL_	1000 ±10%	2.83	1.1	0.98	4.28	1.1	0.37	0.52

#### 1. When ordering, please specify termination and packaging code:

MSD1278-105K L D

- Termination: L = RoHS compliant matter tin over nickel over phos bronze
  - Special order:  $\mathbf{T}$  = RoHS tin-silver-copper (95.5/4/0.5) or  $\mathbf{S}$  = non-RoHS tin-lead (63/37).
- Packaging:
   D = 13" machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel).
  - B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.
- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- 5. Leakage inductance is for L1 and is measured with L2 shorted.
- DC current, at which the inductance drops 30% (typ) from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- 9. Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications." Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Specifications subject to change without notice. Please check our website for latest information.

Document 499-2 Revised 02/22/11

© Coilcraft, Inc. 2011

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469 E-mail info@coilcraft.com Web http://www.coilcraft.com

#### Temperature rise calculation based on specified Irms

 $\begin{array}{l} \mbox{Winding power loss} = (I_{L1}^2 + I_{L2}^2) \times \mbox{DCR in Watts (W)} \\ \mbox{Temperature rise } (\Delta t) = \mbox{Winding power loss} \times \frac{52.6^\circ \mbox{C}}{\mbox{W}} \\ \mbox{\Delta t} = (I_{L1}^2 + I_{L2}^2) \times \mbox{DCR} \times \frac{52.6^\circ \mbox{C}}{\mbox{W}} \\ \end{array}$ 


**Example 1.** MSD1278-153ML (Equal current in each winding) Winding power loss =  $(2.3^2 + 2.3^2) \times 0.072 = 0.761$  W  $\Delta t = 0.761$  W  $\times \frac{52.6^{\circ}C}{W} = 40^{\circ}C$ 

**Example 2.** MSD1278-153ML ( $I_{L1} = 2.4 \text{ A}$ ,  $I_{L2} = 1.3 \text{ A}$ ) Winding power loss =  $(2.4^2 + 1.3^2) \times 0.072 = 0.536 \text{ W}$ 

$$\Delta t = 0.536 \text{ W} \times \frac{52.6^{\circ}\text{C}}{\text{W}} = 28.2^{\circ}\text{C}$$


#### **Coupled Inductor Core and Winding Loss Calculator**

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. Visit www.coilcraft.com/coupledloss.

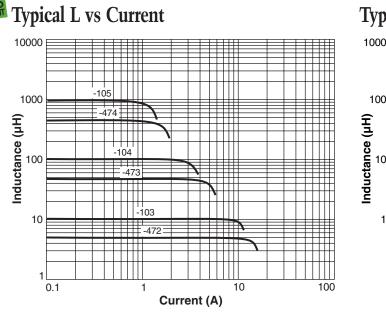


## Coupled Inductors – MSD1278 Series

## **Typical L vs Frequency**



### **Current Derating**



Coilcraft

Specifications subject to change without notice. Please check our website for latest information. Documer

Document 499-3 Revised 02/22/11

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469 E-mail info@coilcraft.com Web http://www.coilcraft.com