
VFM STEP-UP DC/DC CONVERTER

NO.EA-045-080411

OUTLINE

The RN5RKxx1A/xx1B/xx2A Series are CMOS-based VFM (Chopper) Step-up DC/DC converter ICs with ultra low supply current and high output voltage accuracy.

Each of the RN5RKxx1A/xx1B consists of an oscillator, a VFM control circuit, a driver transistor to have low ON resistance (Lx switch), a reference voltage unit, a high speed comparator, resistors for voltage detection, an Lx switch protection circuit and an internal chip enable circuit. A low ripple, high efficiency step-up DC/DC converter can be composed of this RN5RKxx1A/xx1B with only three external components: an inductor, a diode and a capacitor.

The RN5RKxx2A uses the same chip as what is employed in the RN5RKxx1A/1B IC and has a drive pin (EXT) for an external transistor instead of an Lx pin. As it is possible to load a large output current with a power transistor which has a low saturation voltage, RN5RKxx2A IC is recommendable to users who need an output current as large as between several tens mA and several hundreds mA.

Using the chip enable function, it is possible to make the supply current on standby minimized.

Since the package for these ICs is SOT-23-5, high density mounting of the ICs on board is possible.


FEATURES

- Small Number of External Components Only an inductor, a diode and a capacitor (RN5RKxx1A/xx1B)
- Standby Current Typ. 0 μ A
- Low Temperature-Drift Coefficient of Output Voltage..... Typ. \pm 100ppm/ $^{\circ}$ C
- Output Voltage Range..... 2.0V to 5.5V
- Two Kinds of Duty Ratio..... 77% (xx1A, xx2A)/ 55% (xx1B)
- High Output Voltage Accuracy \pm 2.5%
- Small Packages SOT-23-5
- High Efficiency Typ. 85% (RN5RK301B, V_{IN} =2V, I_{OUT} =10mA)
- Low Ripple and Low Noise
- Including a Driver Transistor with Low ON Resistance..... Only RN5RKxx1A/xx1B
- Low Start-up Voltage..... Max.0.9V

APPLICATIONS

- Power source for battery-powered equipment.
- Power source for cameras, camcorders, VCRs, and hand-held communication equipment.
- Power source for those appliances which require higher cell voltage than that of batteries.

OUTLINE DIAGRAM

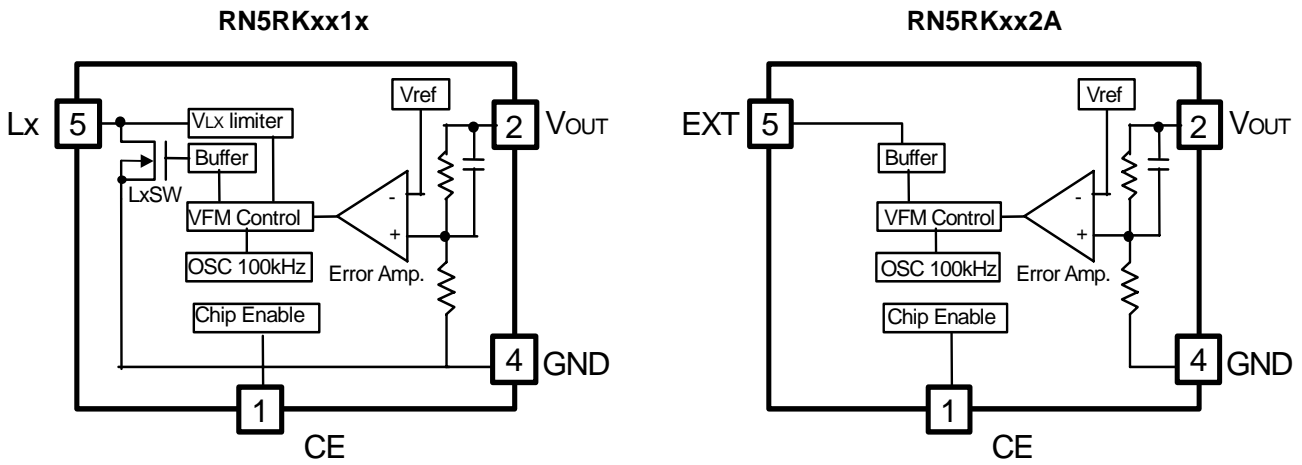

SELECTION GUIDE

The output voltage, the driver type, the duty cycle and the taping type for the ICs can be selected at the user's request.


The selection can be made by designating the part number as shown below:

RN5RKxxxx-xx ← Part Number
 ↑↑↑ ↑
 a bc d

| Code | Contents |
|------|--|
| a | Setting Output Voltage (V_{OUT}) : Stepwise setting with a step of 0.1V in the range of 2.0V to 5.5V is possible. |
| b | Designation of Driver 1: Internal Lx Tr. Driver 2: External Tr. Driver |
| c | Designation of Duty Cycle A: 77% B: 55% |
| d | Designation of Taping type Ex. TR (Refer to Taping Specifications; TR type is the standard direction.) |

PIN CONFIGURATIONS

- SOT-23-5



PIN DISCRIPTION

- RN5RKxx1x

| Pin No. | Symbol | Description |
|---------|------------------|---|
| 1 | CE | Chip Enable Pin |
| 2 | V _{OUT} | Step-up Output Monitoring Pin, Power Supply (for device itself) |
| 3 | NC | No Connection |
| 4 | GND | Ground Pin |
| 5 | L _x | Switching Pin (Nch Open Drain) |

- RN5RKxx2A

| Pin No. | Symbol | Description |
|---------|------------------|---|
| 1 | CE | Chip Enable Pin |
| 2 | V _{OUT} | Step-up Output Monitoring Pin, Power Supply (for device itself) |
| 3 | NC | No Connection |
| 4 | GND | Ground Pin |
| 5 | EXT | External Tr. Drive Pin (CMOS Output) |

ABSOLUTE MAXIMUM RATINGS

• RN5RKxx1x

| Symbol | Item | Rating | Unit |
|-----------|-------------------------------|----------------------|------|
| V_{OUT} | Step-up Output Pin Voltage | 0.3 to 9.0 | V |
| V_{LX} | Lx Pin Voltage | 0.3 to 9.0 | V |
| V_{CE} | CE Pin Voltage | 0.3 to $V_{OUT}+0.3$ | V |
| I_{LX} | Lx Pin Output Current | 500 | mA |
| P_D | Power Dissipation (SOT-23-5)* | 420 | mW |
| T_{opt} | Operating Temperature Range | 40 to 85 | °C |
| T_{stg} | Storage Temperature Range | 55 to 125 | °C |

• RN5RKxx2A

| Symbol | Item | Rating | Unit |
|-----------|--|----------------------|------|
| V_{OUT} | Step-up Output Pin Voltage | 0.3 to 9.0 | V |
| V_{EXT} | EXT Pin Voltage | 0.3 to $V_{OUT}+0.3$ | V |
| V_{CE} | CE Pin Voltage | 0.3 to $V_{OUT}+0.3$ | V |
| I_{EXT} | EXT Pin Output Current | ± 30 | mA |
| P_D | Power Dissipation (SOT-23-5)* ¹ | 420 | mW |
| T_{opt} | Operating Temperature Range | 40 to 85 | °C |
| T_{stg} | Storage Temperature Range | 55 to 125 | °C |

*)For Power Dissipation, please refer to PACKAGE INFORMATION to be described.

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

ELECTRICAL CHARACTERISTICS

• RN5RKxx1A/xx1B

$T_{opt}=25^{\circ}\text{C}$

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|---|--|---|----------------|-----------|----------------|----------------------------|
| V_{OUT} | Output Voltage | $V_{IN}=\text{Set } V_{OUT}\times 0.6, I_{OUT}=1\text{mA}$ | $\times 0.975$ | | $\times 1.025$ | V |
| V_{IN} | Input Voltage | | | | 8.0 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage Temperature Coefficient | $-40^{\circ}\text{C} \leq T_{opt} \leq 85^{\circ}\text{C}$ | | ± 100 | | ppm/ $^{\circ}\text{C}$ |
| V_{start} | Start-Up Voltage | $V_{IN}=0\text{V} \rightarrow 2\text{V}^{*1}$ | | 0.75 | 0.90 | V |
| $\frac{\Delta V_{start}}{\Delta T_{opt}}$ | Start-Up Voltage Temperature Coefficient | $-40^{\circ}\text{C} \leq T_{opt} \leq 85^{\circ}\text{C}$ $V_{IN}=0\text{V} \rightarrow 2\text{V}^{*1}$ | | -1.6 | | mV/ $^{\circ}\text{C}$ |
| V_{hold} | Hold-on Voltage (xx1A) | $V_{IN}=2\text{V} \rightarrow 0\text{V}^{*1}$ | 0.7 | | | V |
| V_{hold} | Hold-on Voltage (xx1B) | $V_{IN}=2\text{V} \rightarrow 0\text{V}^{*1}$ | 0.9 | | | V |
| I_{DD2} | Supply Current2 | $V_{OUT}=V_{CE}=\text{Set } V_{OUT}+0.5\text{V}$ | | 2 | 5 | μA |
| $I_{standby}$ | Standby Current | $V_{OUT}=6\text{V}, V_{CE}=0\text{V}$ | | | 0.5 | μA |
| I_{Lxleak} | Lx Leakage Current | $V_{OUT}=V_{Lx}=8\text{V}$ | | | 1 | μA |
| f_{osc} | Maximum Oscillator Frequency | $V_{OUT}=V_{CE}=\text{Set } V_{OUT}\times 0.96$ | 80 | 100 | 120 | kHz |
| $\frac{\Delta f_{osc}}{\Delta T_{opt}}$ | Frequency Temperature Coefficient | $-40^{\circ}\text{C} \leq T_{opt} \leq 85^{\circ}\text{C}$ | | 0.41 | | kHz/ $^{\circ}\text{C}$ |
| Maxduty | Oscillator Duty Cycle (xx1A) | $V_{OUT}=V_{CE}=\text{Set } V_{OUT}\times 0.96,$ ON (V_{Lx} "L" side) | 70 | 77 | 85 | % |
| | Oscillator Duty Cycle (xx1B) | | 47 | 55 | 63 | % |
| V_{Lxlim} | V_{Lx} Voltage Limit | $V_{OUT}=V_{CE}=1.95\text{V}, Lx$ Switch ON | 0.4 | 0.6 | 0.8 | V |
| V_{CEH} | CE "H" Input Voltage | $V_{OUT}=V_{CE}=\text{Set } V_{OUT}\times 0.96,$ Judgment is made by the Lx waveform | 0.9 | | | V |
| V_{CEL} | CE "L" Input Voltage | | | | 0.3 | V |
| I_{CEH} | CE "H" Input Current | $V_{OUT}=6.0\text{V}, V_{CE}=6.0\text{V}$ | -0.5 | 0 | 0.5 | μA |
| I_{CEL} | CE "L" Input Current | $V_{OUT}=6.0\text{V}, V_{CE}=0\text{V}$ | -0.5 | 0 | 0.5 | μA |
| I_{DD1} | Supply Current1 *2 | $2.0\text{V} \leq \text{Set } V_{OUT} \leq 2.4\text{V}$ | | 25 | 50 | μA |
| | | $2.5\text{V} \leq \text{Set } V_{OUT} \leq 2.9\text{V}$ | | 30 | 55 | |
| | | $3.0\text{V} \leq \text{Set } V_{OUT} \leq 3.4\text{V}$ | | 35 | 60 | |
| | | $3.5\text{V} \leq \text{Set } V_{OUT} \leq 3.9\text{V}$ | | 40 | 65 | |
| | | $4.0\text{V} \leq \text{Set } V_{OUT} \leq 4.4\text{V}$ | | 45 | 75 | |
| | | $4.5\text{V} \leq \text{Set } V_{OUT} \leq 4.9\text{V}$ | | 50 | 80 | |
| | | $5.0\text{V} \leq \text{Set } V_{OUT} \leq 5.5\text{V}$ | | 55 | 90 | |

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|-----------------|----------------------|---|------|------|------|------|
| I _{LX} | Lx Switching Current | 2.0V ≤ Set V _{OUT} ≤ 2.4V, V _{LX} =0.4V | 80 | | | mA |
| | | 2.5V ≤ Set V _{OUT} ≤ 2.9V, V _{LX} =0.4V | 100 | | | |
| | | 3.0V ≤ Set V _{OUT} ≤ 3.4V, V _{LX} =0.4V | 120 | | | |
| | | 3.5V ≤ Set V _{OUT} ≤ 3.9V, V _{LX} =0.4V | 140 | | | |
| | | 4.0V ≤ Set V _{OUT} ≤ 4.4V, V _{LX} =0.4V | 160 | | | |
| | | 4.5V ≤ Set V _{OUT} ≤ 4.9V, V _{LX} =0.4V | 180 | | | |
| | | 5.0V ≤ Set V _{OUT} ≤ 5.5V, V _{LX} =0.4V | 200 | | | |

*1)Condition: An Output load resistor R_L is connected between V_{OUT} and GND.

Note that the resistor R_L has a resistance which makes an output current 1mA after step-up operation.

*2)The Supply Current 1 (I_{DD1}) for IC itself is measured when the internal oscillator works continuously.

If the oscillator works intermittently, the supply current becomes smaller than the value which is written on the above table.


● RN5RKxx2A

T_{opt}=25°C


| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|--|---|---|--------|------|--------|------------|
| V _{OUT} | Output Voltage | V _{OUT} =V _{CE} =0V→6V, Judgment is made by the EXT waveform | ×0.975 | | ×1.025 | V |
| V _{IN} | Input Voltage | | | | 8.0 | V |
| ΔV _{OUT} / ΔT _{opt} | Output Voltage Temperature Coefficient | -40°C ≤ T _{opt} ≤ 85°C | | ±100 | | ppm /°C |
| V _{start} | Start-Up Voltage | V _{OUT} =V _{CE} =0V→2V | | 0.7 | 0.8 | V |
| I _{DD2} | Supply Current2 | V _{OUT} =V _{CE} =Set V _{OUT} +0.5V | | 2 | 5 | μA |
| I _{standby} | Standby Current | V _{OUT} =6V, V _{CE} =0V | | | 0.5 | μA |
| f _{osc} | Maximum Oscillator Frequency | V _{OUT} =V _{CE} =Set V _{OUT} ×0.96 | 80 | 100 | 120 | kHz |
| Δf _{osc} / ΔT _{opt} | Frequency Temperature Coefficient | -40°C ≤ T _{opt} ≤ 85°C | | 0.41 | | kHz /°C |
| Duty | Oscillator Duty Cycle | V _{OUT} =V _{CE} =Set V _{OUT} ×0.96, ON (V _{LX} "H" side) | 70 | 77 | 85 | % |
| V _{CEH} | CE "H" Input Voltage | V _{OUT} =V _{CE} =Set V _{OUT} ×0.96, Judgment is made by the EXT waveform | 0.9 | | | V |
| V _{CEL} | CE "L" Input Voltage | | | | 0.3 | V |
| I _{CEH} | CE "H" Input Current | V _{OUT} =6.0V, V _{CE} =6.0V | -0.5 | 0 | 0.5 | μA |
| I _{CEL} | CE "L" Input Current | V _{OUT} =6.0V, V _{CE} =0V | -0.5 | 0 | 0.5 | μA |
| I _{DD1} | Supply Current1 *1 | 2.0V ≤ V _{OUT} ≤ 2.9V, EXT no load | | 20 | 40 | μA |
| | | 3.0V ≤ V _{OUT} ≤ 3.9V, EXT no load | | 25 | 50 | |
| | | 3.0V ≤ V _{OUT} ≤ 3.4V, EXT no load | | 30 | 60 | |
| | | 3.5V ≤ V _{OUT} ≤ 3.9V, EXT no load | | 35 | 70 | |
| I _{EXTH} | EXT "H" Output Current | 2.0V ≤ V _{OUT} ≤ 2.4V, EXT no load | | | -1.0 | mA |
| | | 2.5V ≤ V _{OUT} ≤ 2.9V, EXT no load | | | -1.5 | |
| | | 4.0V ≤ V _{OUT} ≤ 5.5V, EXT no load | | | -2.0 | |
| I _{EXTL} | EXT "L" Output Current | 2.0V ≤ V _{OUT} ≤ 2.9V, EXT no load | 1.0 | | | |
| | | 3.0V ≤ V _{OUT} ≤ 3.9V, EXT no load | 1.5 | | | |
| | | 4.0V ≤ V _{OUT} ≤ 5.5V, EXT no load | 2.0 | | | |

*1) The Supply Current 1 (I_{DD1}) for IC itself is measured when the internal oscillator works continuously.
If the oscillator works intermittently, the supply current becomes smaller than the value which is written on the above table.

TYPICAL APPLICATIONS AND TECHNICAL NOTES

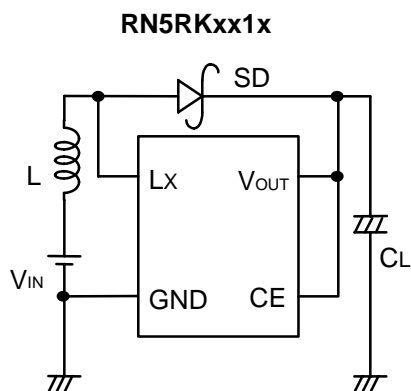

L : 100 μ H (Sumida, CD54)
 SD : MA721 (Matsushita Electronics, Schottky Type)
 CL : 47 μ F (Tantalum Type)

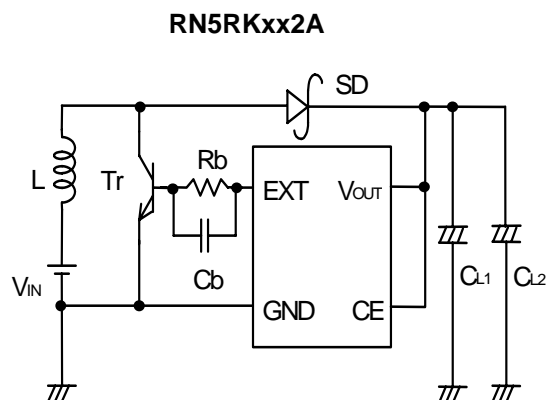

L : 27 μ H (Sumida, CD105)
 SD : RB111C (Rohm, Schottky Type)
 CL1 : 47 μ F (Tantalum Type)
 CL2 : 47 μ F (Tantalum Type)
 Tr : 2SD1628G
 Rb : 300 Ω
 Cb : 0.01 μ F

When you use these ICs, consider the following issues;

- Set external components as close as possible to the IC and minimize the connection between the components and the IC. In particular, a capacitor should be connected to V_{OUT} pin with the minimum connection.

- Make sufficient grounding. A large current flows through GND pin by switching. When the impedance of the GND connection is high, the potential within the IC is varied by the switching current. This may result in unstable operation of the IC.

- Use capacitors with a capacity of 22 μ F or more, and with good high frequency characteristics such as tantalum capacitors.

We recommend you to use output capacitors with an allowable voltage at least 3 times as much as setting output voltage. This is because there may be a case where a spike-shaped high voltage is generated by an inductor when an L_x transistor is off.

- Choose an inductor that has sufficiently small D.C. resistance and large allowable current and is hard to reach magnetic saturation.


And if the value of inductance of an inductor is extremely small, the I_{Lx} may exceed the absolute maximum rating at the maximum loading.

Use an inductor with appropriate inductance.


- Use a diode of a Schottky type with high switching speed, and also pay attention to its current capacity.

*The performance of power circuit with using this IC depends on external components. Choose the most suitable components for your application.


TEST CIRCUITS

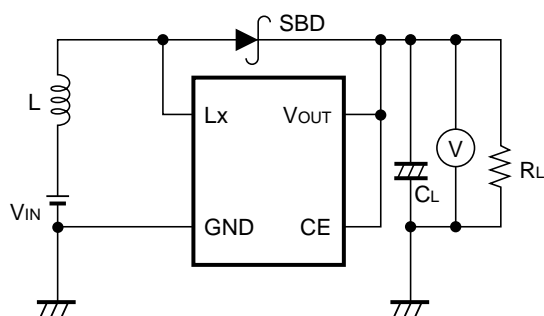

Test Circuit 1

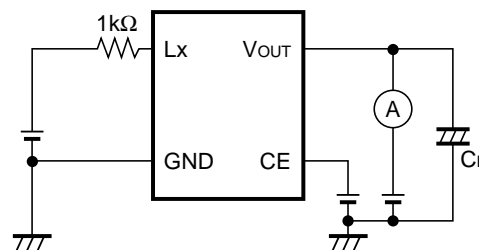

Test Circuit 2

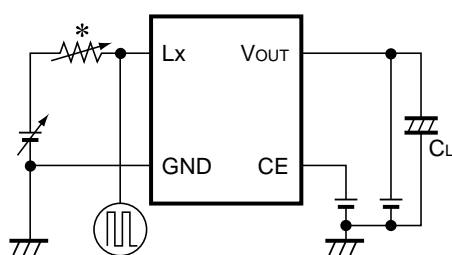

Oscilloscope

Test Circuit 3

*)When V_{Lxlim} and I_{Lx} are measured, the 5Ω resistor is used. Otherwise $1k\Omega$ is used.


Components Inductor (L) : 100 μ H, 220 μ H (Sumida Electric Co., Ltd; CD-54)
 Diode (SBD) : MA721 (Matsushita Electronics Corporation; Schottky Type)
 Capacitor (CL) : 47 μ F (Tantalum Type)

Using these test circuits characteristics data has been obtained as shown on the following pages.


Test Circuit 1: Typical Characteristics (1)-(7)

Test Circuit 2: Typical Characteristics (9)-(11)


Test Circuit 3: Typical Characteristics (8), (12)-(16)

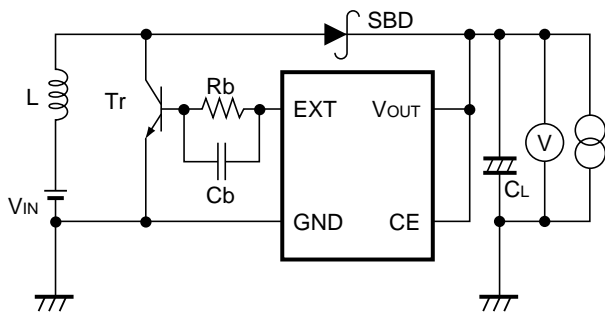


Test Circuit 1

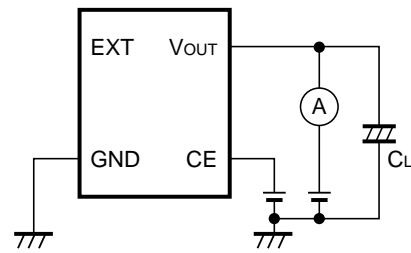

Test Circuit 2

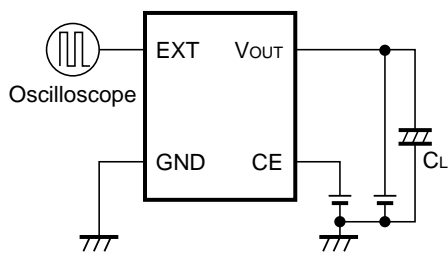

Test Circuit 3

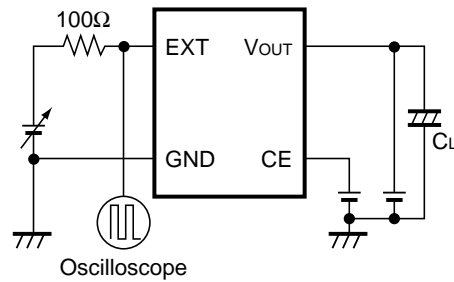

Test Circuit 4

| | | |
|---------------------|-------|--|
| Components Inductor | (L) | : 27 μ H (Sumida Electric Co., Ltd; CD-104) |
| Diode | (SBD) | : RB111C (Rohm Co., Ltd; Schottky Type) |
| Capacitor | (CL) | : 47 μ F \times 2(Tantalum Type) |
| Transistor | (Tr) | : 2SD1628G |
| Base Resistor | (Rb) | : 300 Ω Base Capacitor (Cb): 0.01 μ F |







The typical characteristics were obtained with using these test circuits.



- Test Circuit 1: Typical Characteristics (1)-(5)
- Test Circuit 2: Typical Characteristics (8)-(10)
- Test Circuit 3: Typical Characteristics (11)-(14)
- Test Circuit 4: Typical Characteristics (6), (7)

TYPICAL CHARACTERISTICS





● RN5RKxx1A/B





1) Output Voltage vs. Output Current (Topt=25°C)

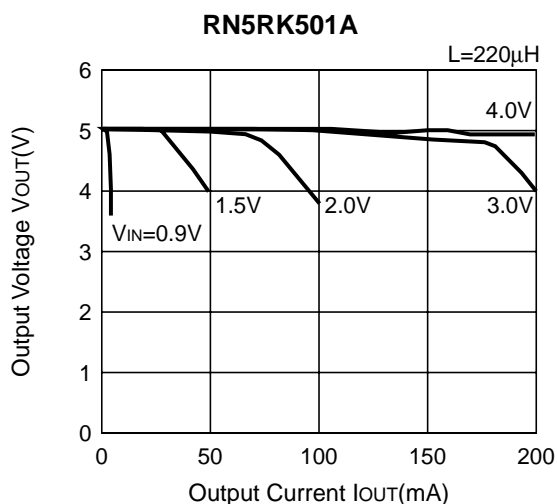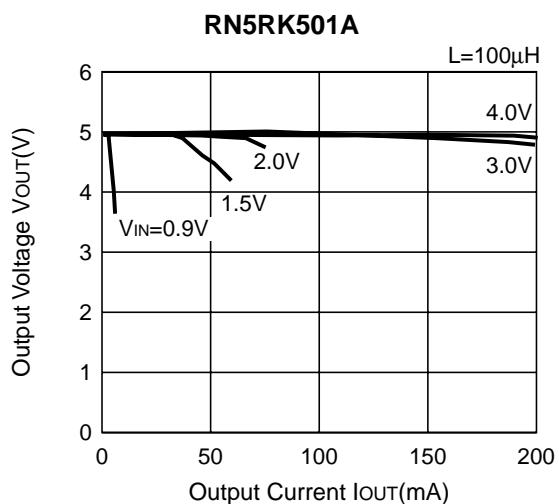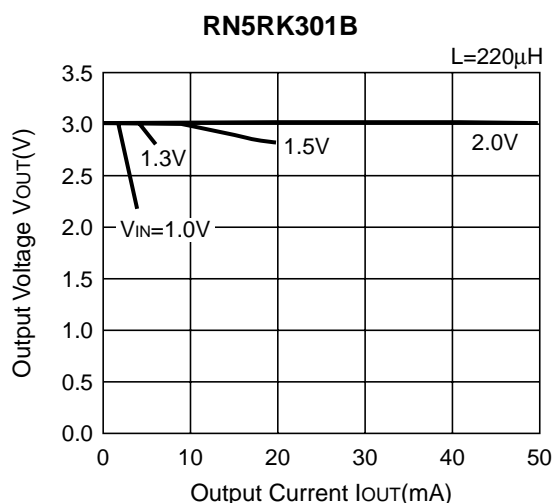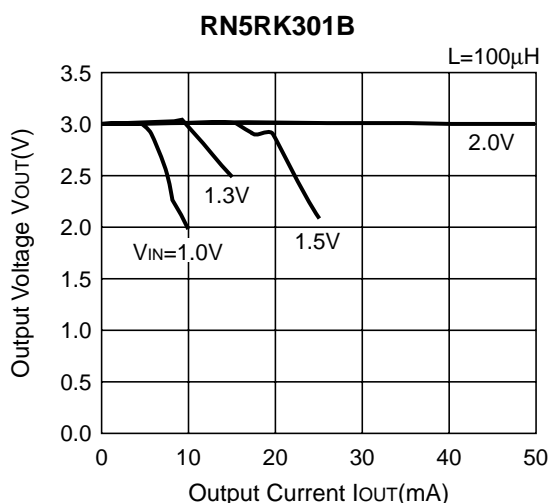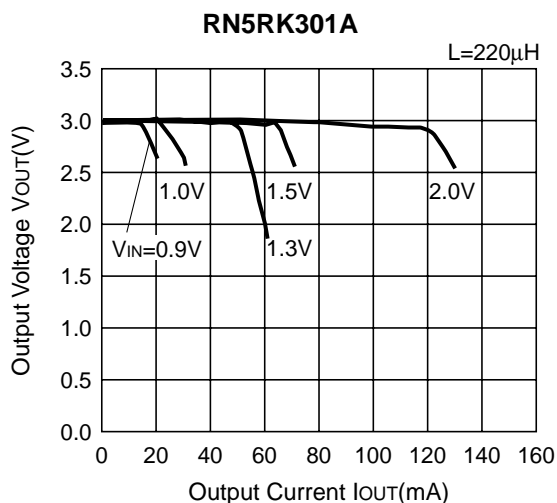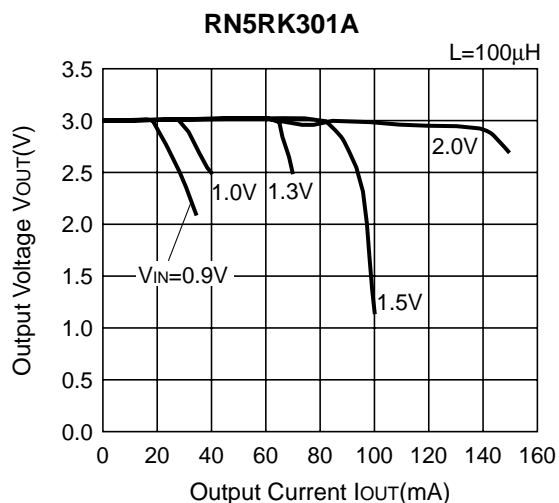

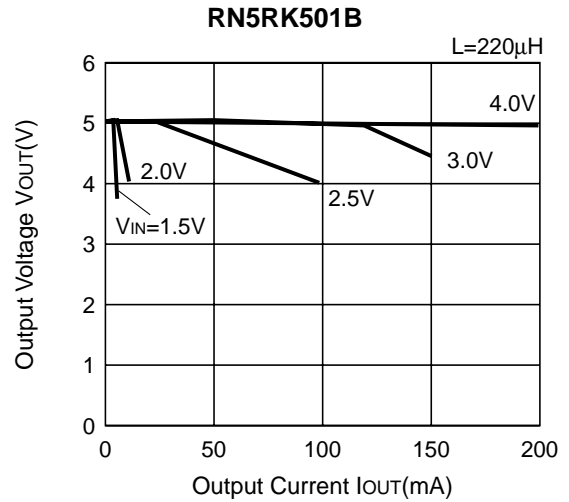
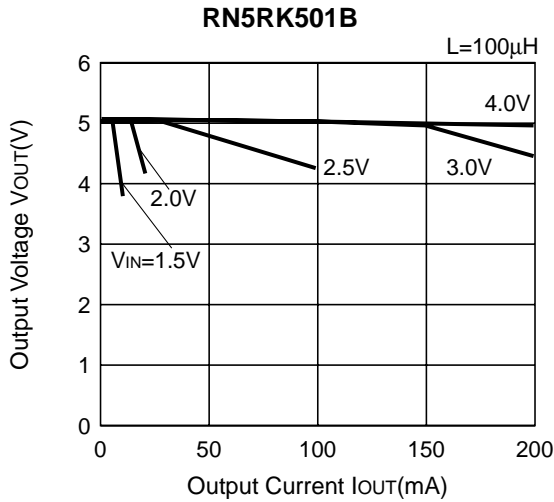








2) Efficiency vs. Output Current ($T_{opt}=25^{\circ}C$)

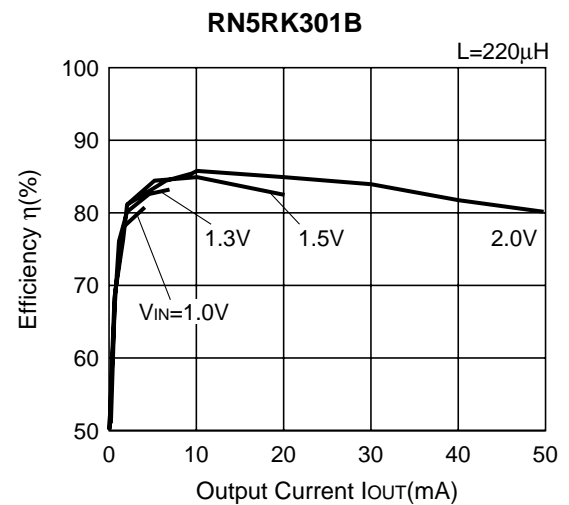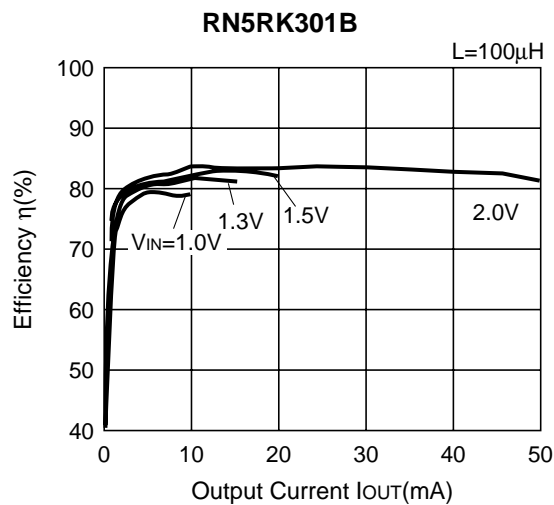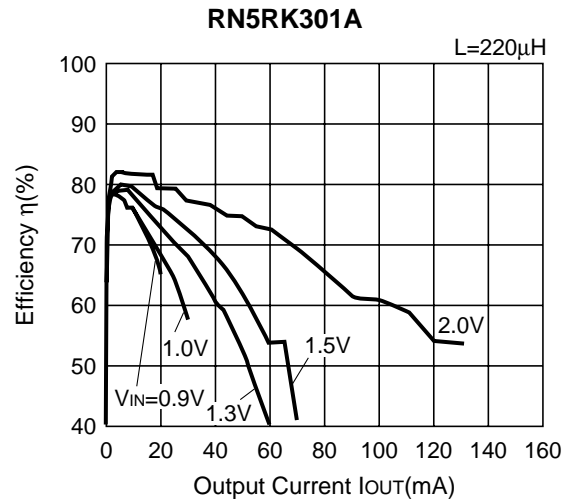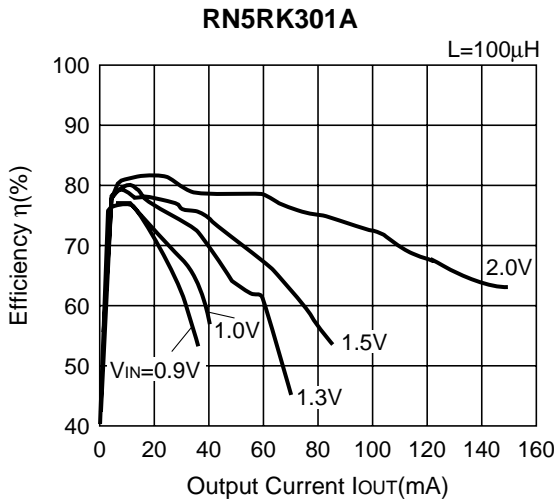

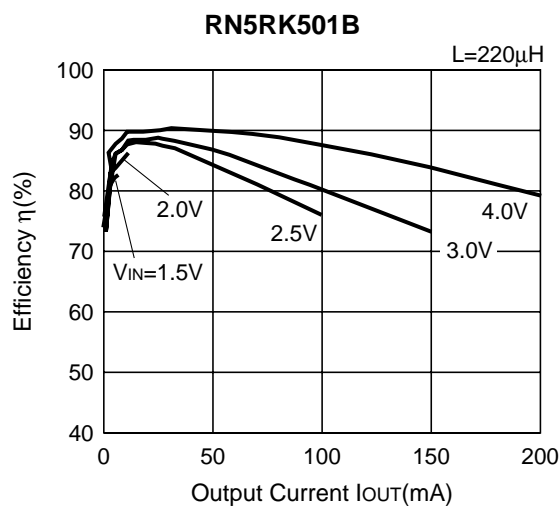
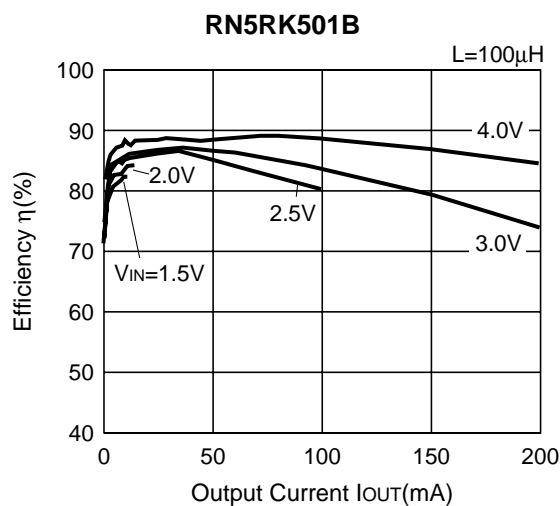
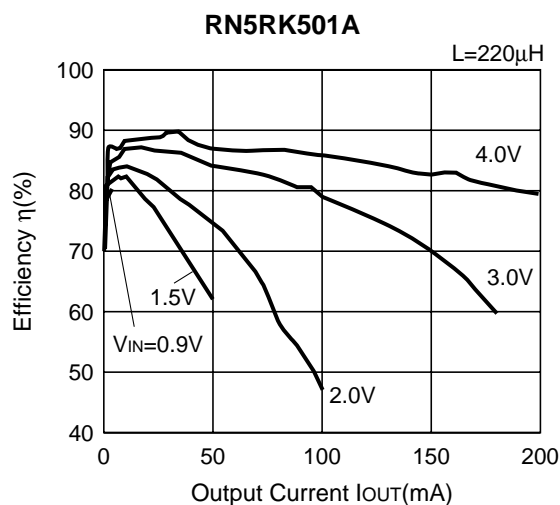
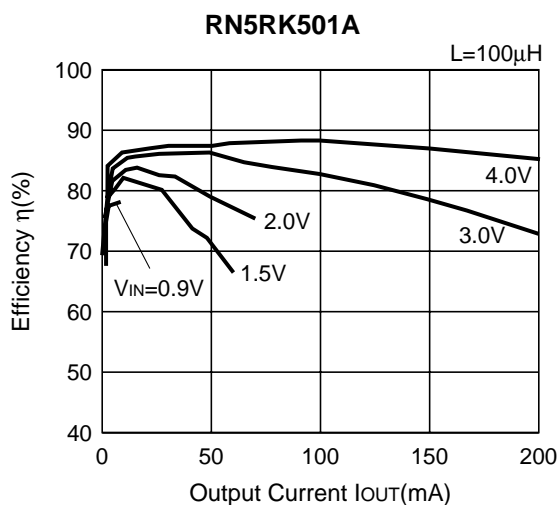


3) Ripple Voltage vs. Output Current (Topt=25°C)

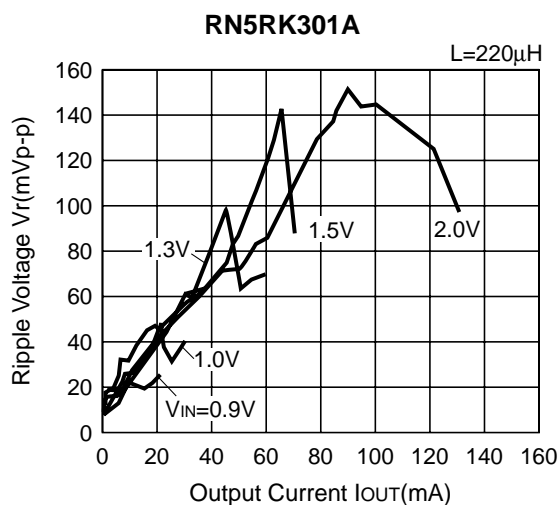
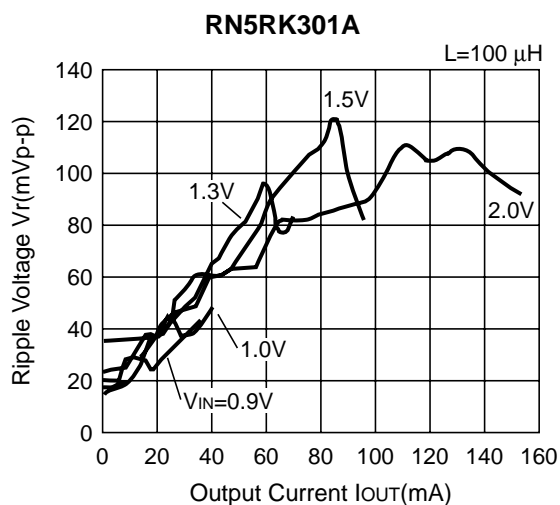


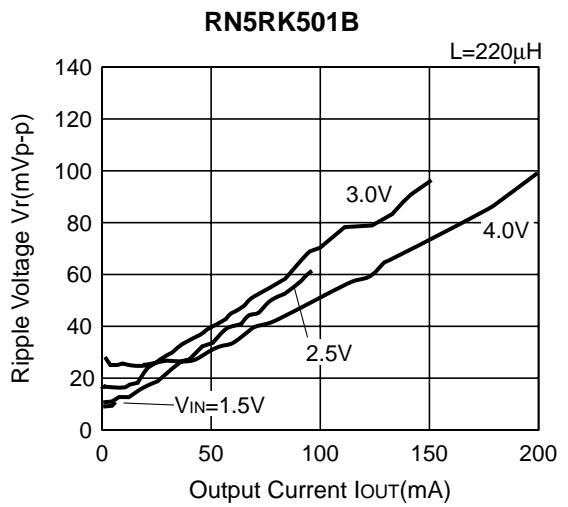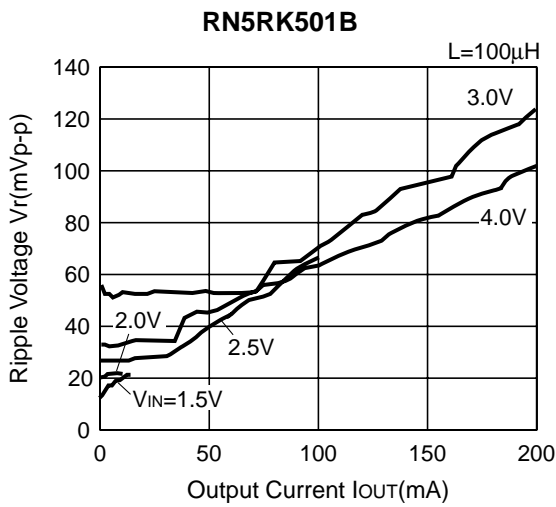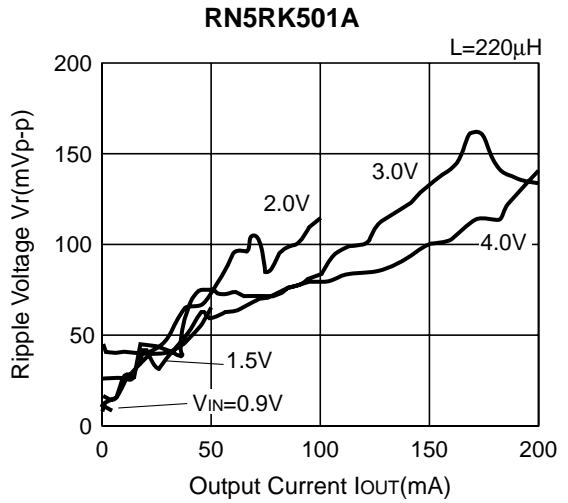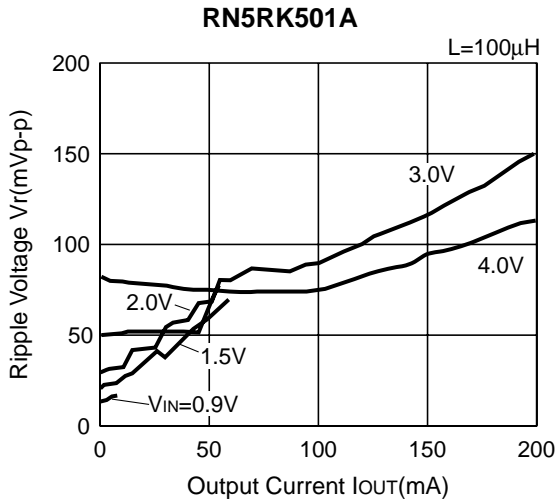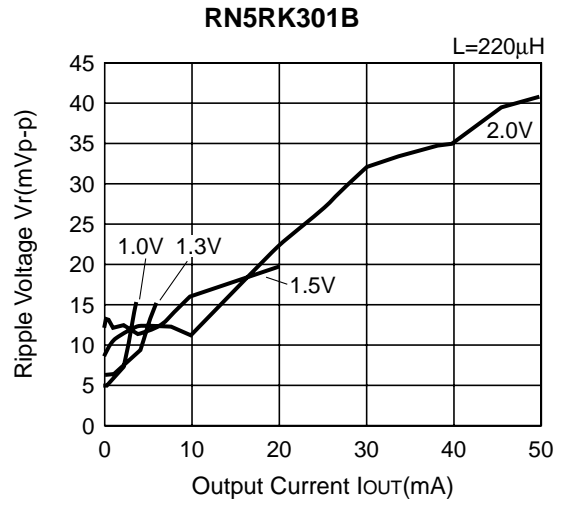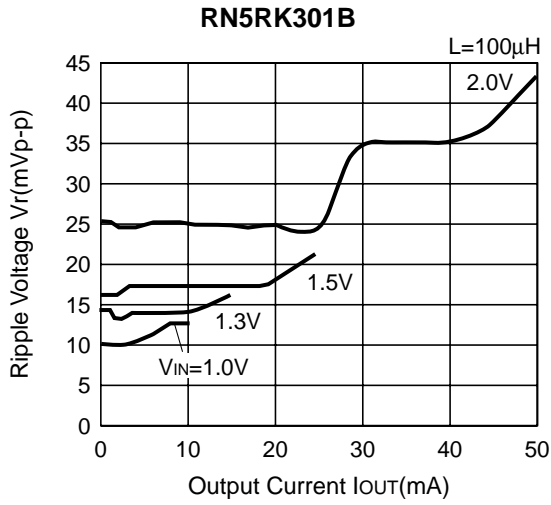



4) Start-up/Hold-on Voltage vs. Output Current (Topt=25 °C)

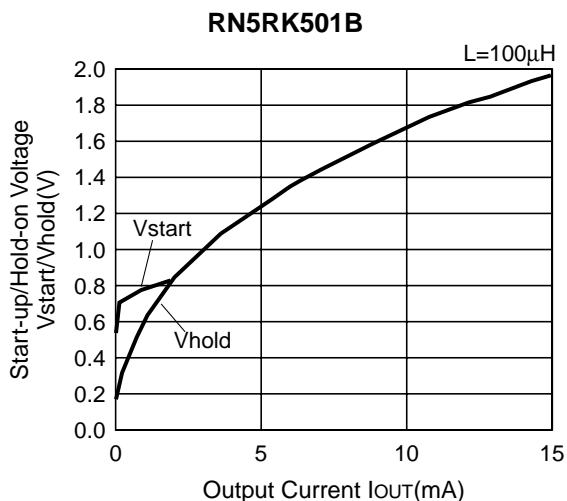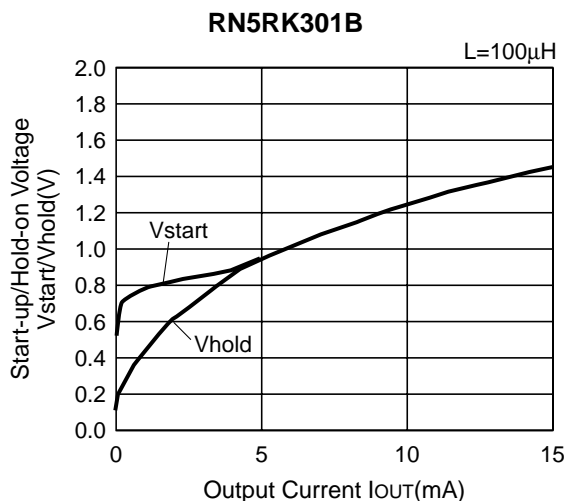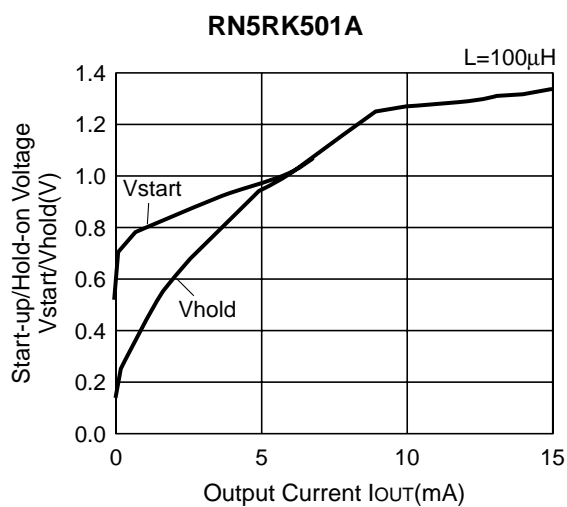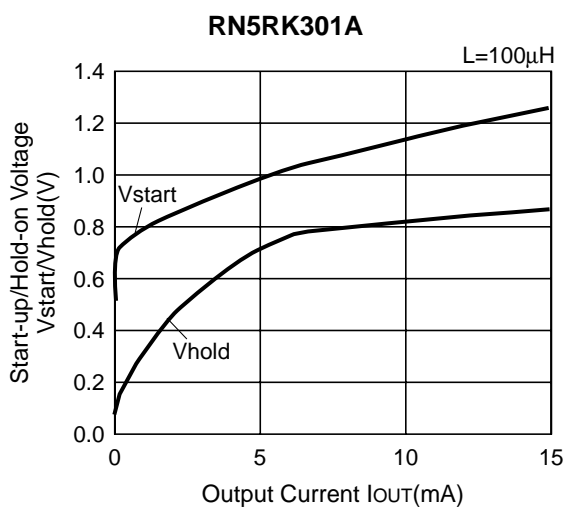



5) Output Voltage vs. Temperature

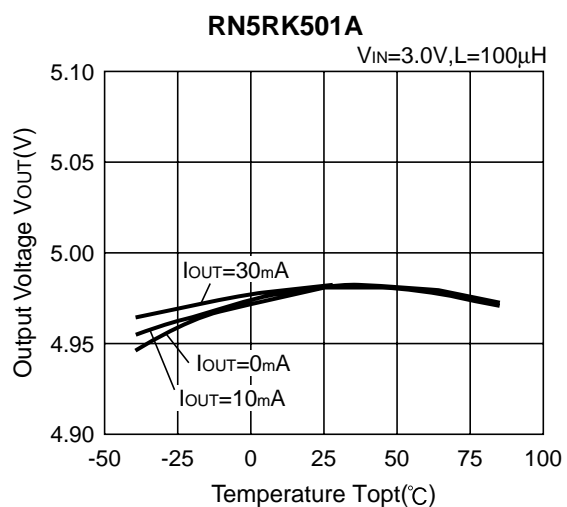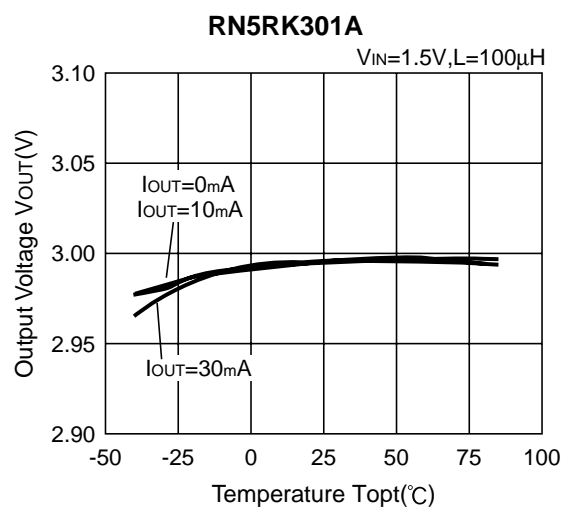



6) Start-up Voltage vs. Temperature

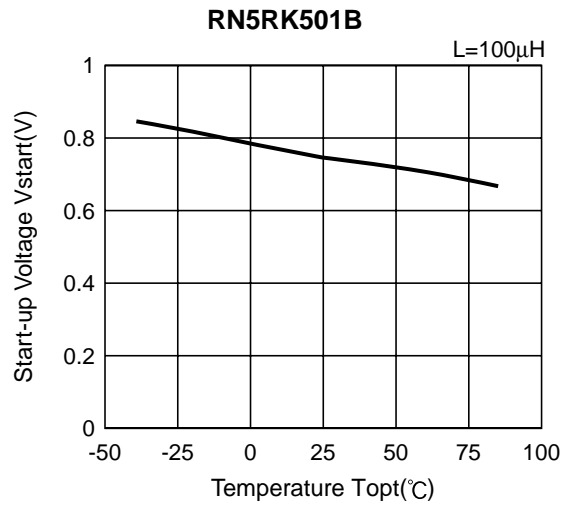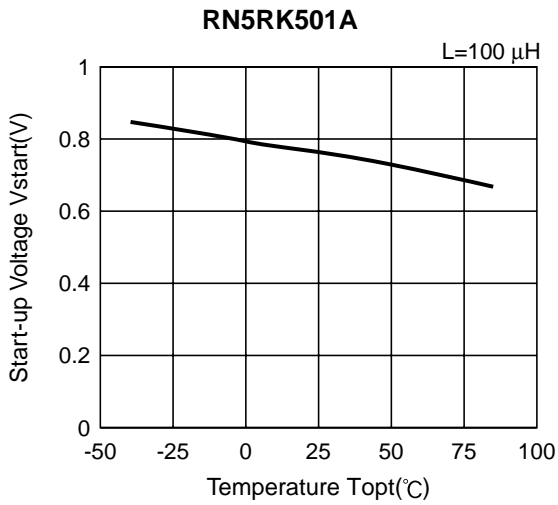



7) Hold-on Voltage vs. Temperature

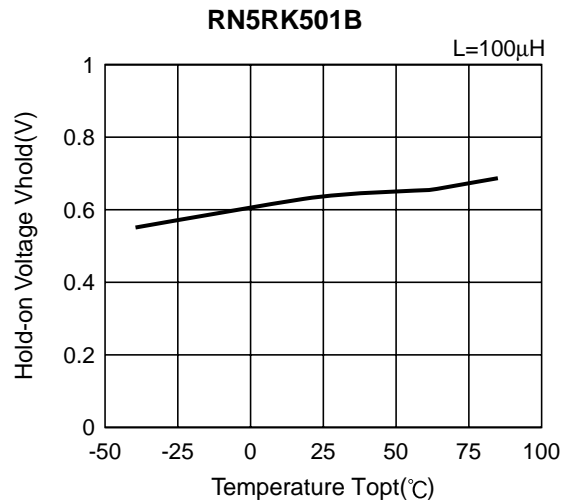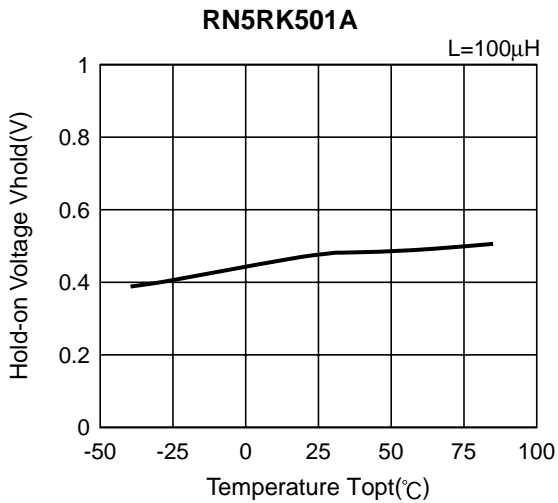


8) Lx Switching Current vs. Temperature

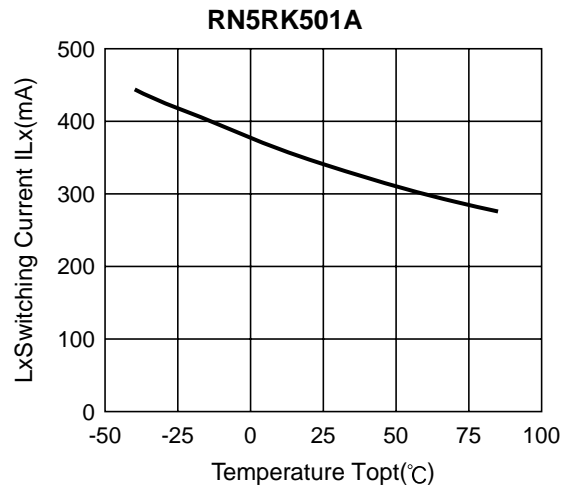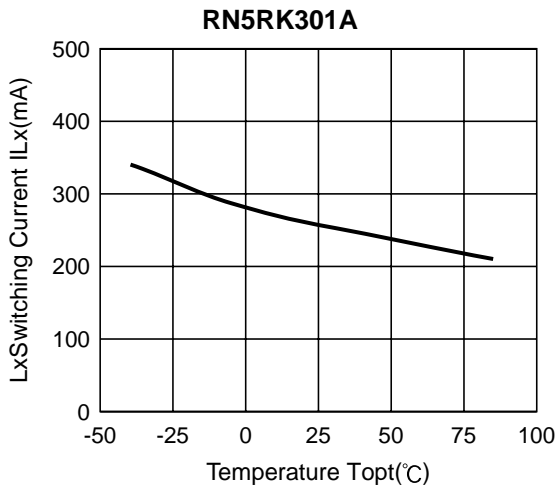


9) Supply Current 1 vs. Temperature

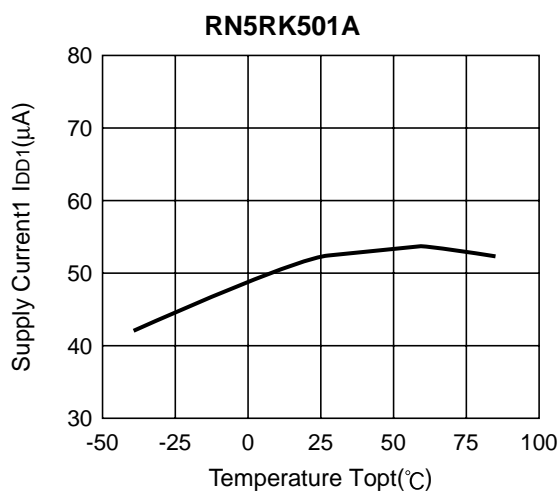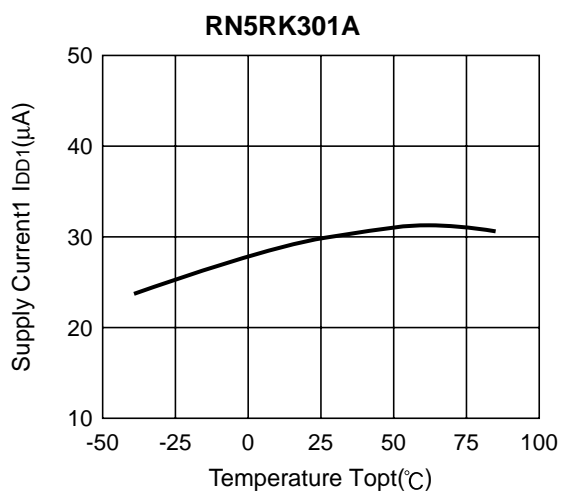



10) Supply Current 2 vs. Temperature

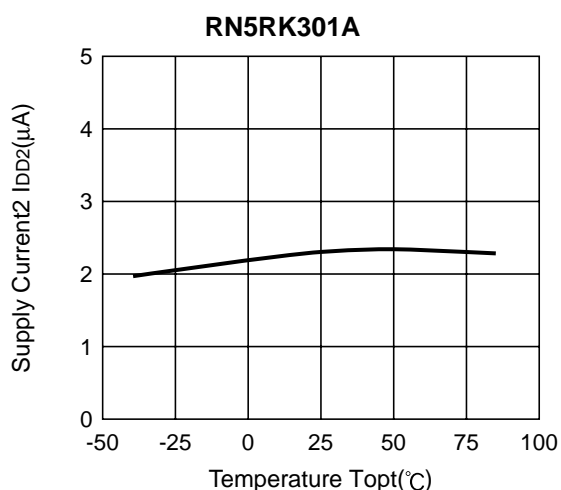


11) Standby Current 3 vs. Temperature

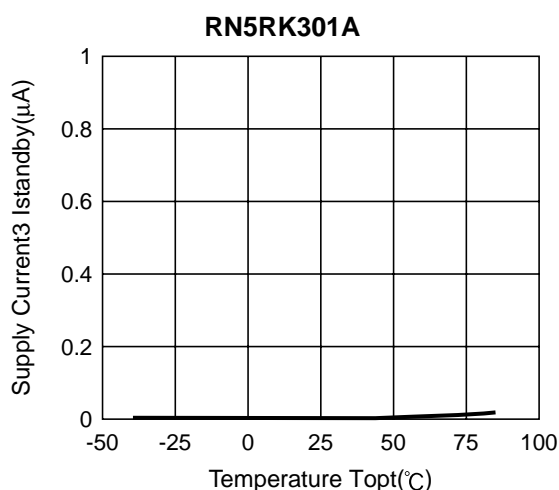


12) Oscillator Duty Cycle vs. Temperature

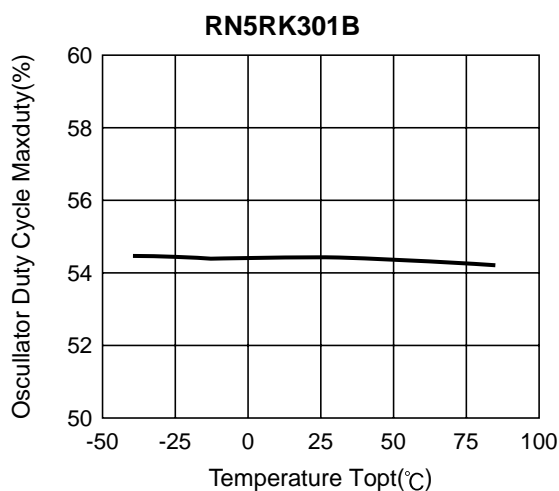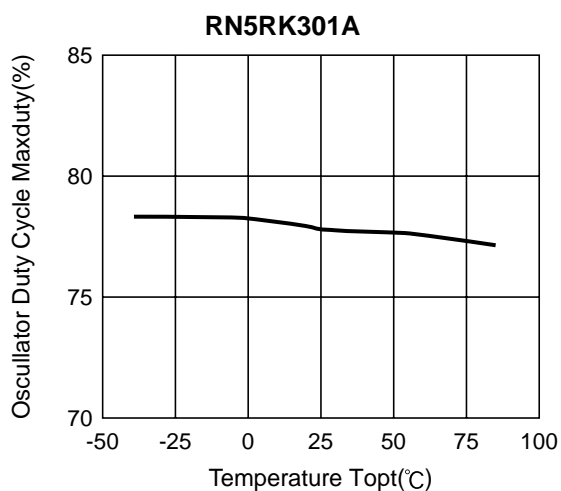


13) CE "H" Input Voltage vs. Temperature

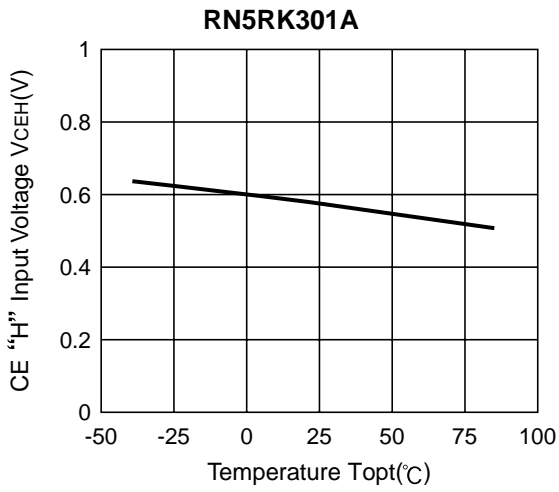


14) CE "L" Input Voltage vs. Temperature

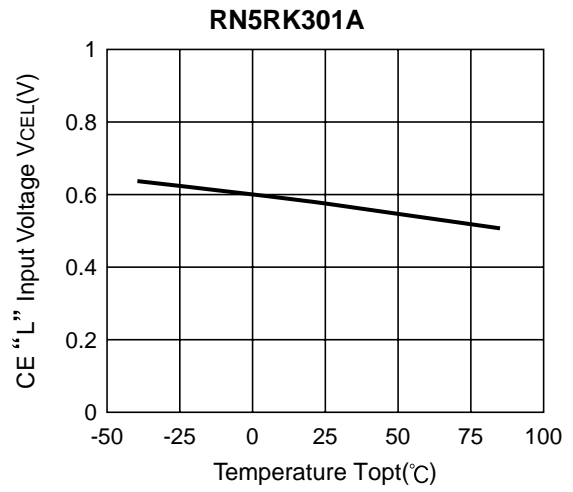

15) Maximum Oscillator Frequency vs. Temperature


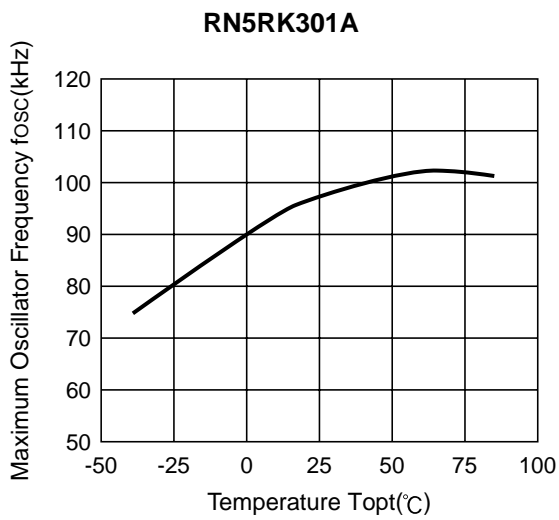


16) V_{Lx} Voltage Limit vs. Temperature


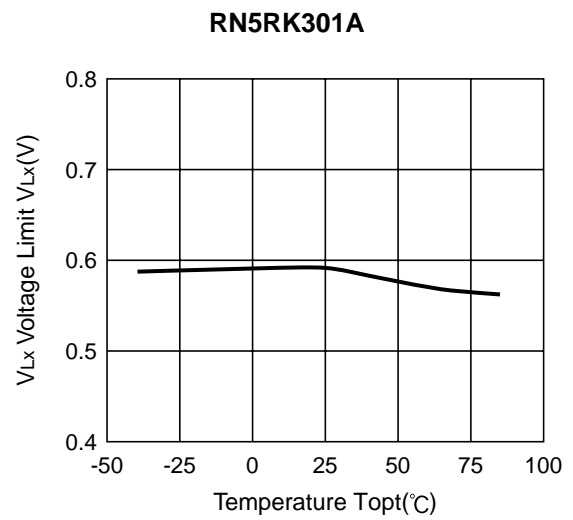


● RN5RKxx2A



1) Output Voltage vs. Output Current (Topt=25°C)

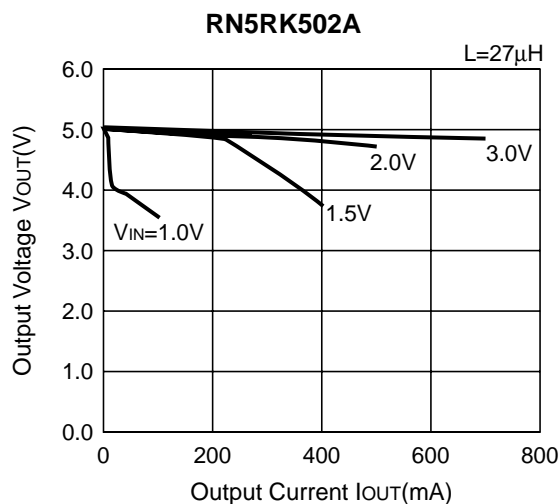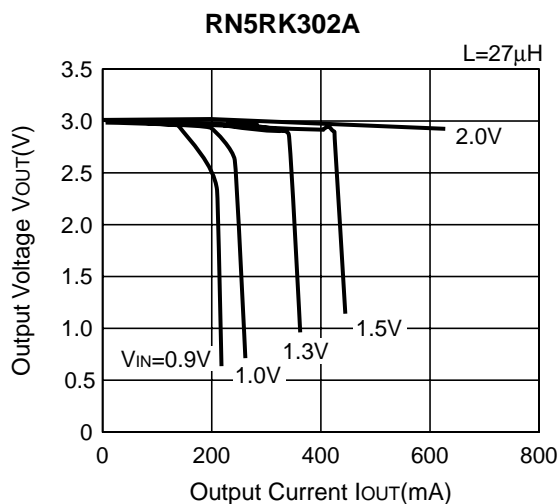



2) Efficiency vs. Output Current (Topt=25°C)

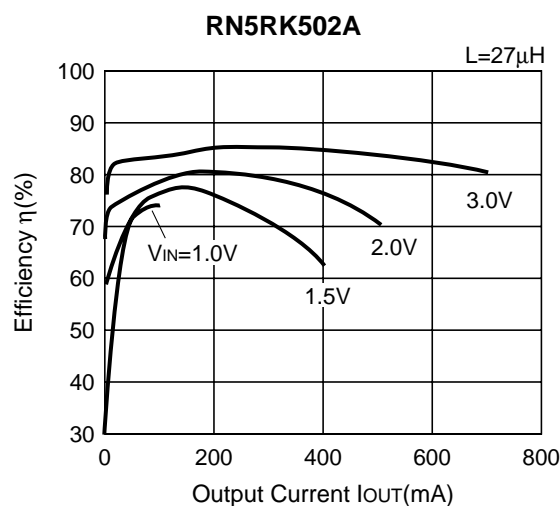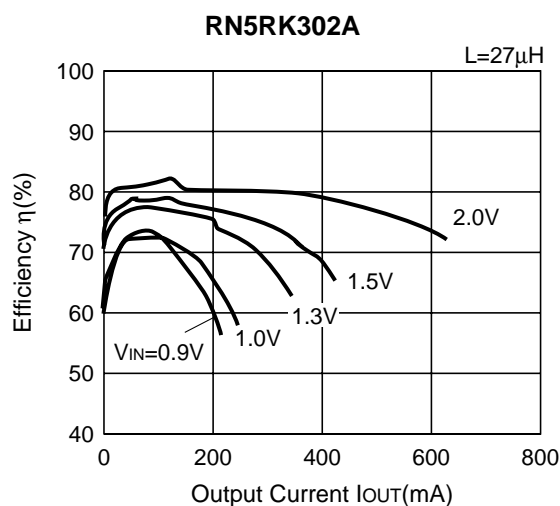



3) Ripple Voltage vs. Output Current (Topt=25°C)

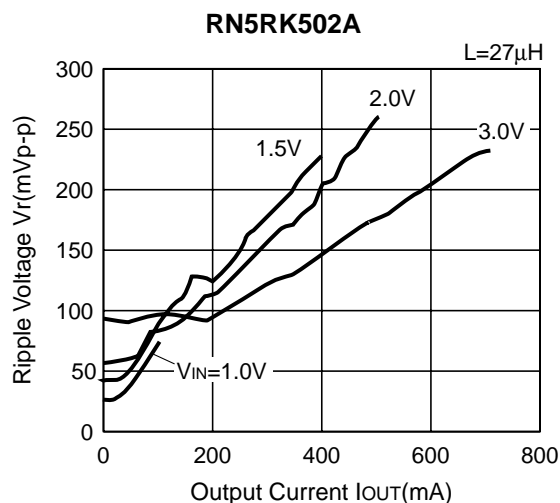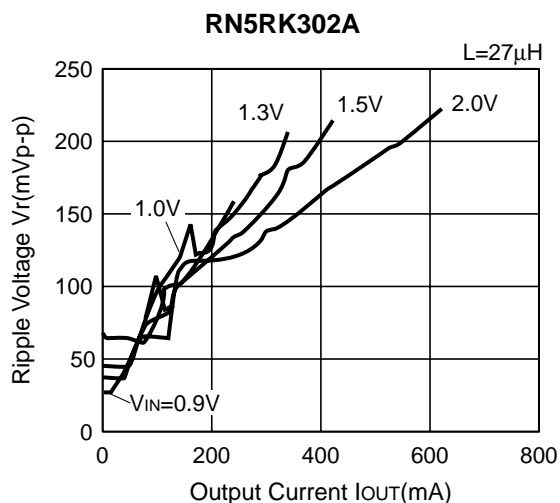



4) Start-up/Hold-on Voltage vs. Output Current (Topt=25°C)

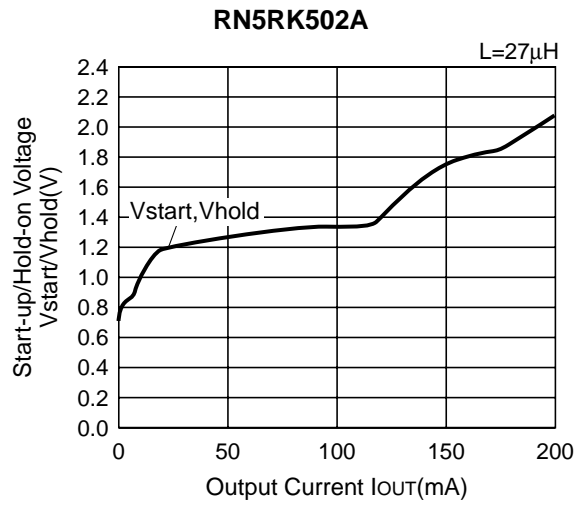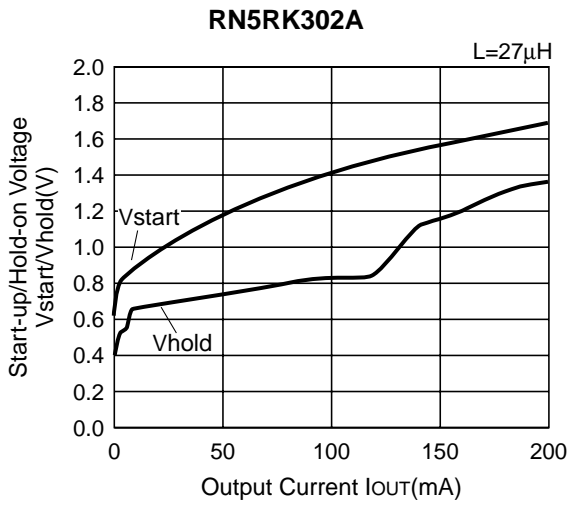



5) Output Voltage vs. Temperature

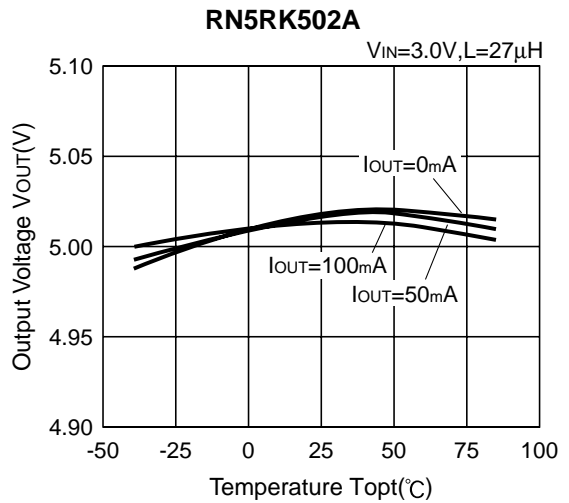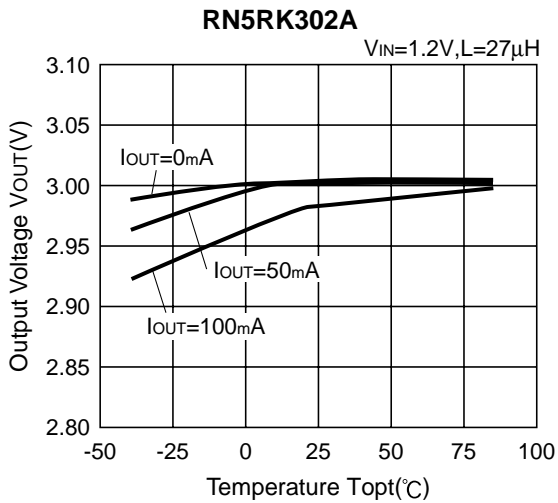



6) EXT "H" Output Current vs. Temperature

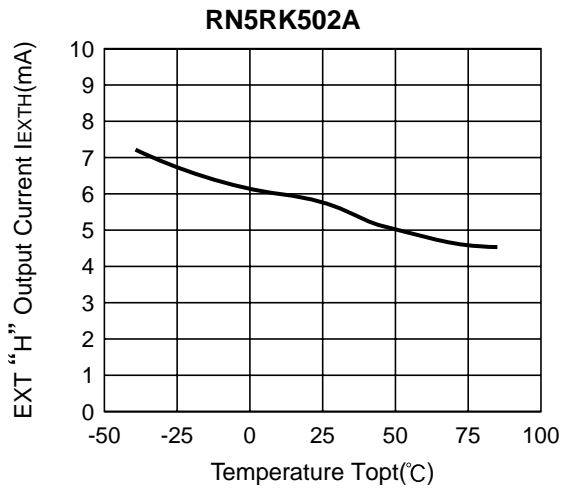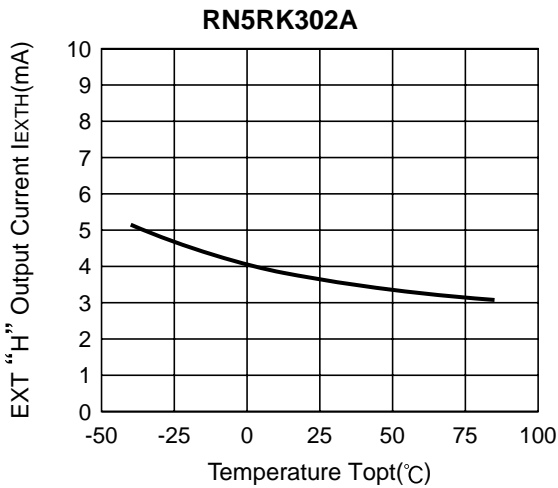


7) EXT "L" Output Current vs. Temperature

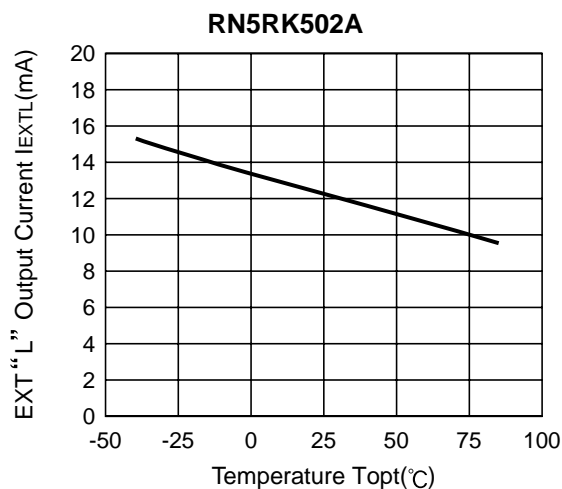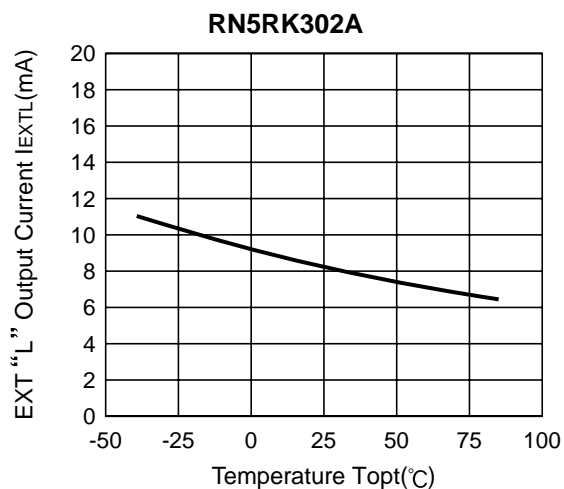


8) Supply Current 1 vs. Temperature

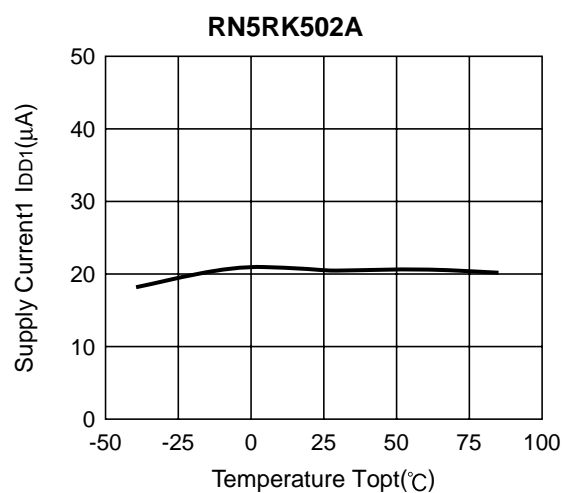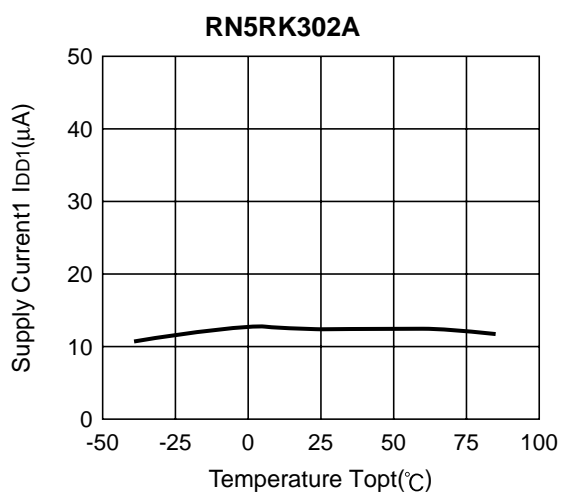


9) Supply Current 2 vs. Temperature

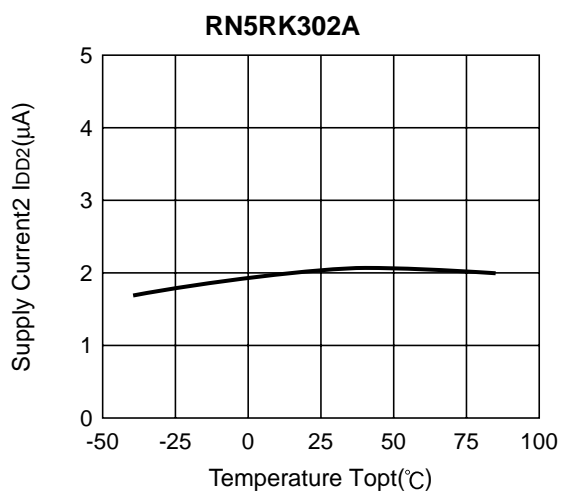


10) Standby Current vs. Temperature

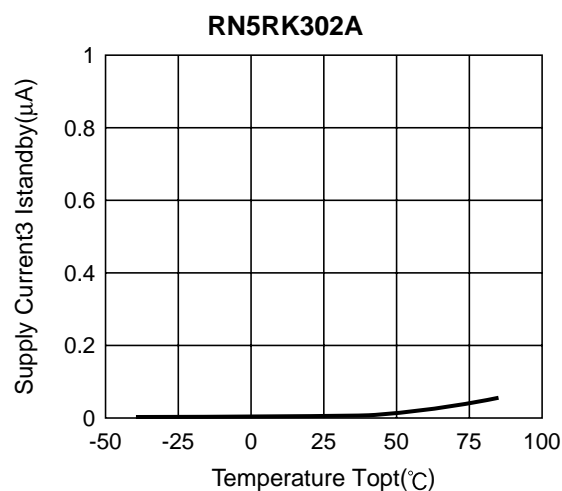


11) Oscillator Duty Cycle vs. Temperature

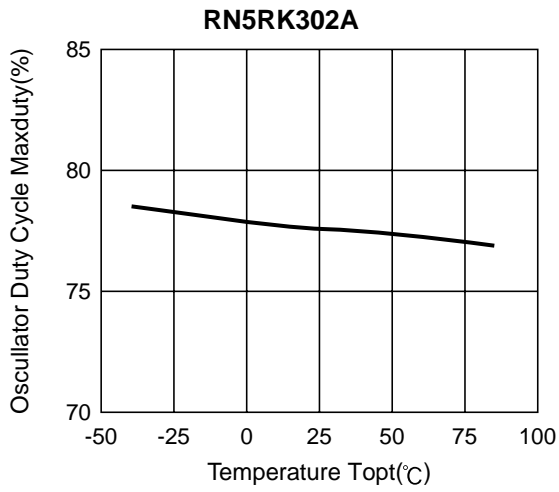


12) Maximum Oscillator Frequency vs. Temperature

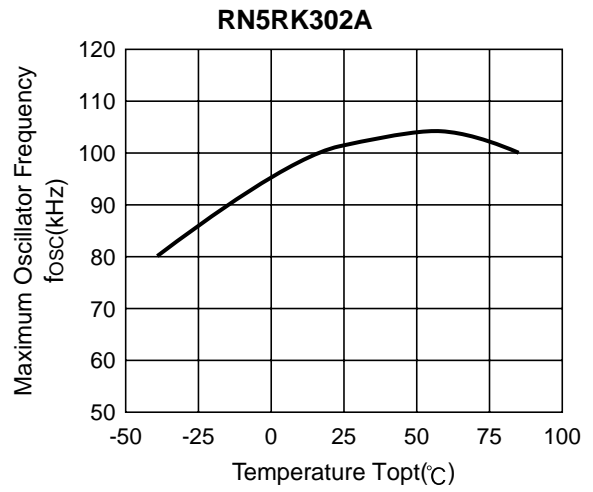

13) CE "H" Input Voltage vs. Temperature

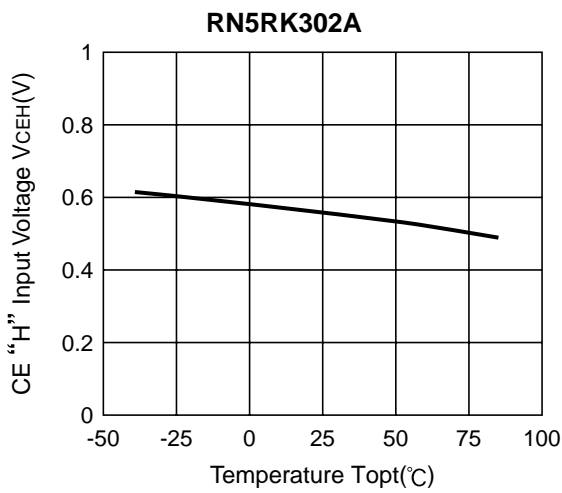


14) CE "L" Input Voltage vs. Temperature

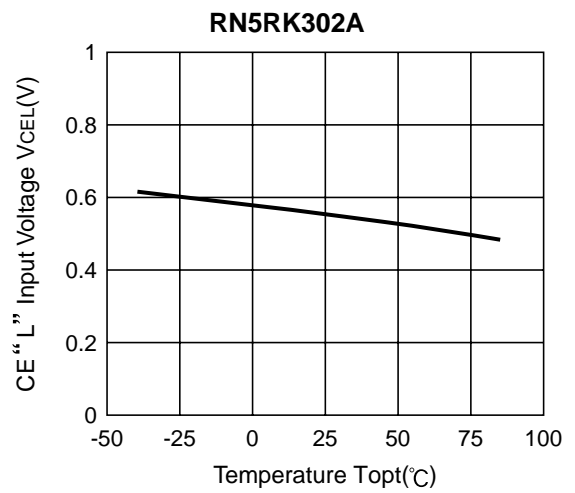


- SOT-23-5 (SC-74A)

Unit: mm

PACKAGE DIMENSIONS

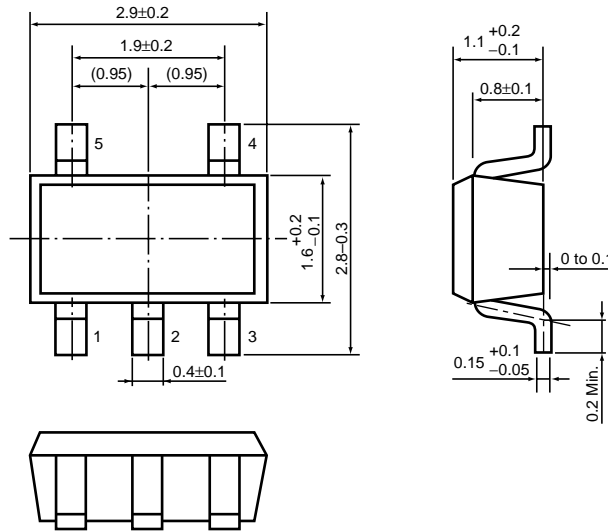


TAPING SPECIFICATION

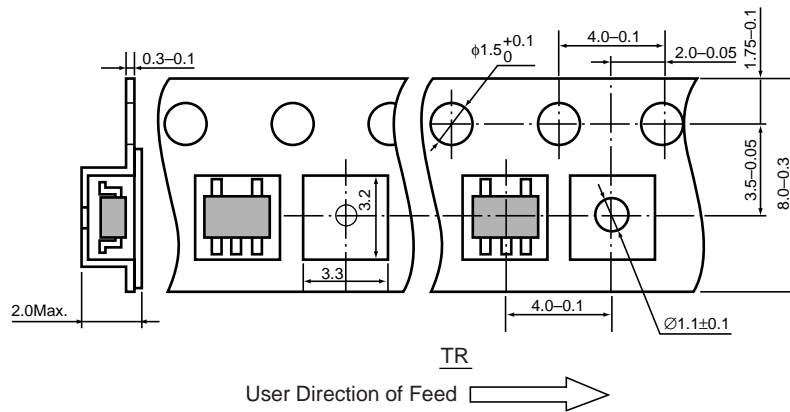

TAPING REEL DIMENSIONS REUSE REEL (EIAJ-RRM-08Bc)

(1reel=3000pcs)

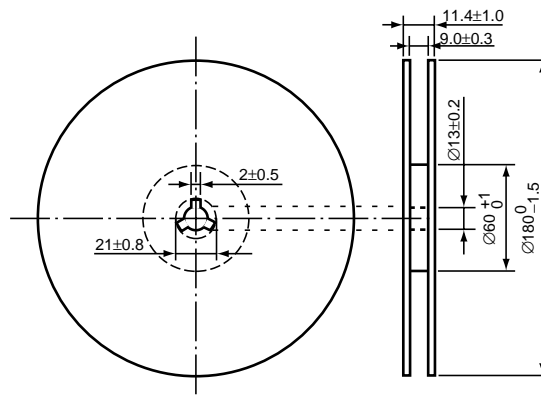

POWER DISSIPATION (SOT-23-5)

This specification is at mounted on board. Power Dissipation (P_D) depends on conditions of mounting on board.

This specification is based on the measurement at the condition below:

(Power Dissipation (SOT-23-5) is substitution of SOT-23-6.)


Measurement Conditions

| | |
|------------------|--|
| | Standard Land Pattern |
| Environment | Mounting on Board (Wind velocity=0m/s) |
| Board Material | Glass cloth epoxy plastic (Double sided) |
| Board Dimensions | 40mm × 40mm × 1.6mm |
| Copper Ratio | Top side : Approx. 50% , Back side : Approx. 50% |
| Through-hole | φ0.5mm × 44pcs |


Measurement Result

($T_{opt}=25^{\circ}C$, $T_{jmax}=125^{\circ}C$)

| | | |
|--------------------|--|-------------------|
| | Standard Land Pattern | Free Air |
| Power Dissipation | 420mW | 250mW |
| Thermal Resistance | $\theta_{ja}=(125-25^{\circ}C)/0.42W=238^{\circ}C/W$ | 400 $^{\circ}C/W$ |

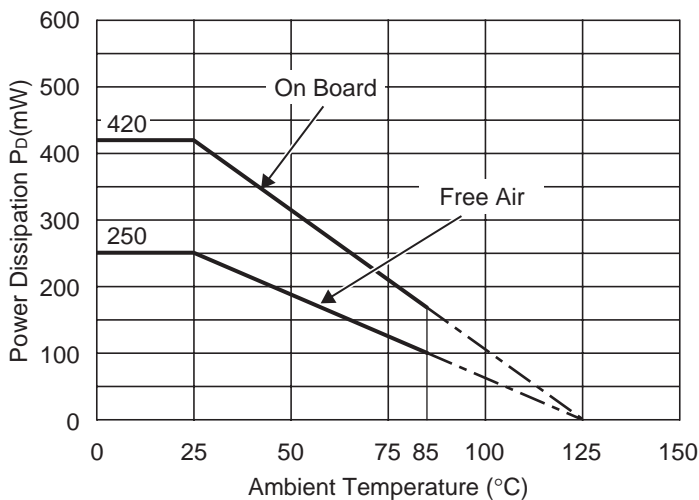


Power Dissipation

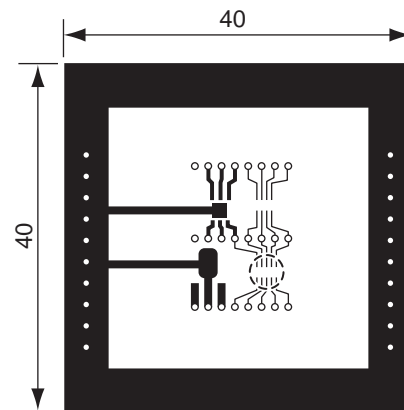

Measurement Board Pattern


○ IC Mount Area Unit : mm

RECOMMENDED LAND PATTERN

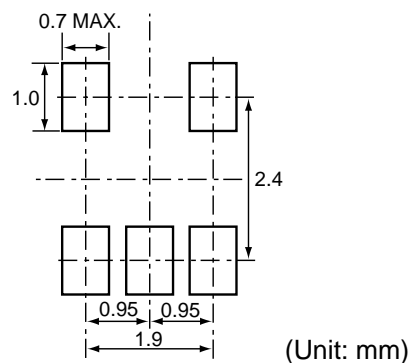

RN5RK SERIES MARK SPECIFICATION

• SOT-23-5 (SC-74A)



①, ② : Product Code (refer to Part Number vs. Product Code)

③, ④ : Lot Number

• Part Number vs. Product Code

RN5RKxx1A Series

| Part Number | Product Code | |
|-------------|--------------|---|
| | ① | ② |
| RN5RK301A | W | A |
| RN5RK241A | W | B |
| RN5RK501A | W | C |
| RN5RK201A | W | D |
| RN5RK251A | W | E |
| RN5RK331A | W | F |
| RN5RK551A | W | G |
| RN5RK221A | W | H |
| RN5RK271A | W | J |
| RN5RK361A | W | K |
| RN5RK261A | W | L |
| RN5RK281A | W | M |
| RN5RK321A | W | N |
| RN5RK371A | W | P |
| RN5RK391A | W | Q |
| RN5RK351A | W | R |
| RN5RK521A | W | S |
| RN5RK401A | W | T |
| RN5RK511A | W | U |
| RN5RK451A | W | V |

RN5RKxx1B Series

| Part Number | Product Code | |
|-------------|--------------|---|
| | ① | ② |
| RN5RK271B | X | A |
| RN5RK201B | X | B |
| RN5RK221B | X | C |
| RN5RK251B | X | D |
| RN5RK301B | X | E |
| RN5RK331B | X | F |
| RN5RK361B | X | G |
| RN5RK501B | X | H |
| RN5RK551B | X | J |
| RN5RK391B | X | K |
| RN5RK421B | X | L |
| RN5RK351B | X | M |
| RN5RK451B | X | N |

RN5RKxx2A Series

| Part Number | Product Code | |
|-------------|--------------|---|
| | ① | ② |
| RN5RK202A | Y | A |
| RN5RK252A | Y | B |
| RN5RK272A | Y | C |
| RN5RK302A | Y | D |
| RN5RK332A | Y | E |
| RN5RK502A | Y | F |
| RN5RK552A | Y | G |
| RN5RK522A | Y | H |
| RN5RK222A | Y | J |
| RN5RK452A | Y | K |
| RN5RK532A | Y | L |
| RN5RK352A | Y | M |
| RN5RK362A | Y | N |
| RN5RK462A | Y | P |
| RN5RK472A | Y | Q |