

TRANSISTOR (NPN)

FEATURES


- Low $V_{CE(sat)}$ - $V_{CE(sat)} = 0.2V$ (Typ.)($I_C / I_B = 2A / 0.1A$)
- Excellent current gain characteristics.
- Complements to 2SA1585

MAXIMUM RATINGS ($T_A=25^\circ C$ unless otherwise noted)

| Symbol | Parameter | Value | Units |
|-----------|-------------------------------|---------|------------|
| V_{CBO} | Collector-Base Voltage | 40 | V |
| V_{CEO} | Collector-Emitter Voltage | 20 | V |
| V_{EBO} | Emitter-Base Voltage | 6 | V |
| I_C | Collector Current -Continuous | 3 | A |
| P_C | Collector Power Dissipation | 500 | mW |
| T_J | Junction Temperature | 150 | $^\circ C$ |
| T_{stg} | Storage Temperature | -55-150 | $^\circ C$ |

SOT-89

1. BASE
2. COLLECTOR
3. EMITTER



ELECTRICAL CHARACTERISTICS ($T_{amb}=25^\circ C$ unless otherwise specified)

| Parameter | Symbol | Test conditions | MIN | TYP | MAX | UNIT |
|---------------------------------------|---------------|---|-----|-----|-----|---------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C = 50\mu A, I_E = 0$ | 40 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C = 1mA, I_B = 0$ | 20 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E = 50\mu A, I_C = 0$ | 6 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB} = 30V, I_E = 0$ | | | 0.1 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB} = 5V, I_C = 0$ | | | 0.1 | μA |
| DC current gain | h_{FE} | $V_{CE} = 2V, I_C = 0.1A$ | 120 | | 560 | |
| Collector-emitter saturation voltage* | V_{CEsat} | $I_C = 2A, I_B = 0.1A$ | | | 0.5 | V |
| Transition frequency | f_T | $V_{CE} = 2V, I_C = 0.5A$ $F = 100MHz$ | 200 | 290 | | MHz |

*pulse test

CLASSIFICATION OF h_{FE}

| Rank | Q | R | S |
|---------|---------|---------|---------|
| Range | 120-270 | 180-390 | 270-560 |
| marking | 4115Q | 4115R | 4115S |

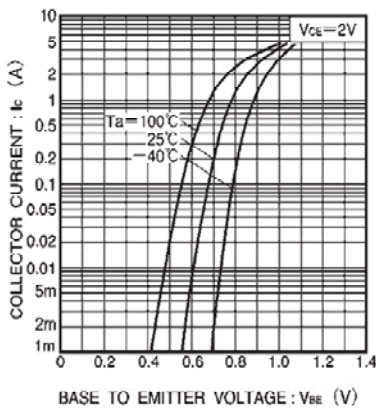


Fig.1 Grounded emitter propagation characteristics

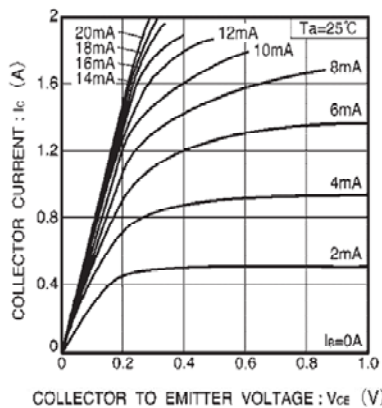


Fig.2 Grounded emitter output characteristics (I)

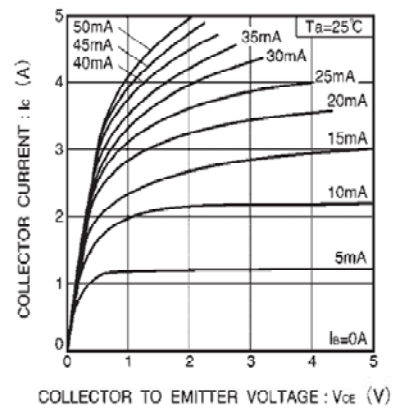


Fig.3 Grounded emitter output characteristics (II)

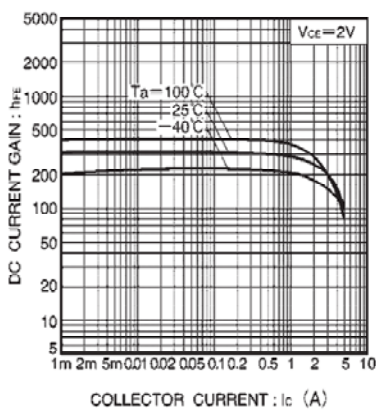


Fig.4 DC current gain vs. collector current

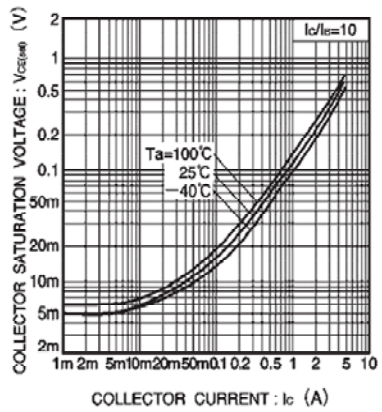


Fig.5 Collector-emitter saturation voltage vs. collector current (I)

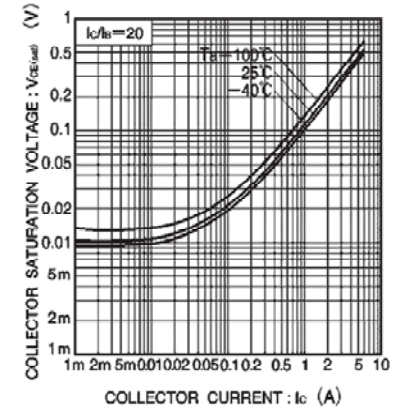


Fig.6 Collector-emitter saturation voltage vs. collector current (II)

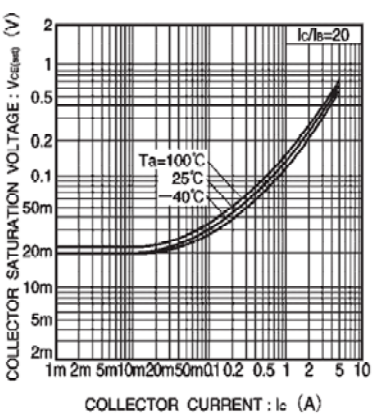


Fig.7 Collector-emitter saturation voltage vs. collector current (III)

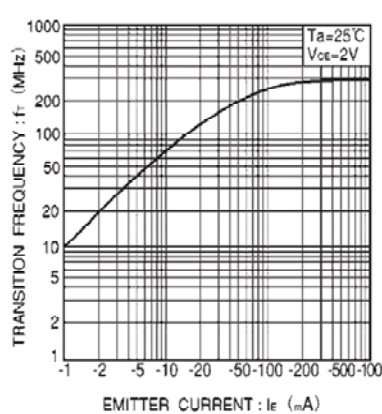


Fig.8 Gain bandwidth product vs. emitter current

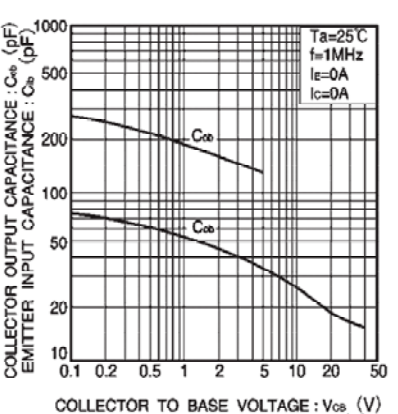


Fig.9 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage