


Flyback Transformer P / N T-836

10 Watt





Turns Ratio (1 - 4 to 5 - 8)		1:10 $\pm$ 2%			
Parameter		Min.	Typ.	Max.	Units
Inductance	(1-4)		20		μ H
Leakage Inductance			.25		μ H
Interwinding Capacitance			20		pF
DC Resistance	(1-5)		20		m Ω
	(2-9)		1300		m Ω
Hi-Pot	(1-4) to (5-8)	1000			V _{RMS}
Primary current			1		A
Operating Frequency			500		kHz

Schematic Diagram

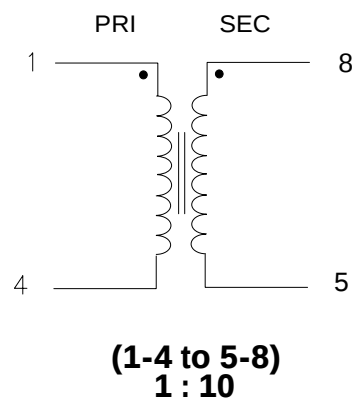

Physical Dimensions

inches (mm)

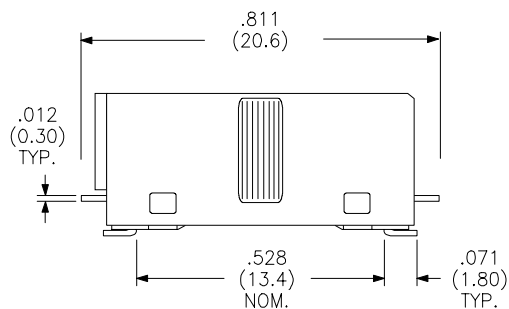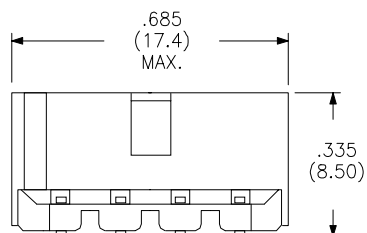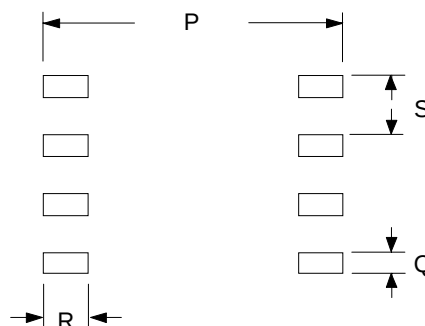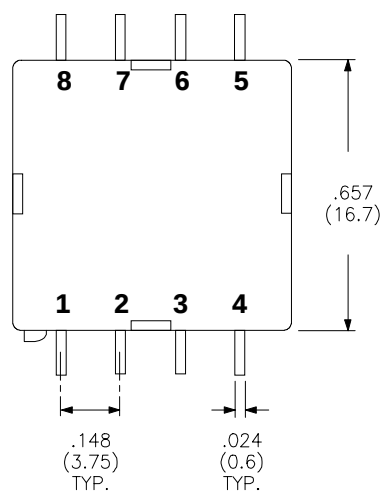

02/5/97