

**Micro Commercial Components** 

**Micro Commercial Components** 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

### Features

- Case Material: Molded Plastic. UL Flammability Classification
- Rating 94V-0 and MSL Rating 1 Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making device design easy


#### Absolute maximum ratings @ $25^{\circ}$ C

Symbol	Parameter	Min	Тур	Max	Unit
V <sub>cc</sub>	Supply voltage		50		V
V <sub>IN</sub>	Input voltage	-10		40	V
I <sub>O</sub> I <sub>C(MAX)</sub>	Output current		30 100		mA
Pd	Power dissipation		200		mW
Tj	Junction temperature		150		°C
T <sub>stg</sub>	Storage temperature	-55		150	°C

### Electrical Characteristics @ 25°C

Symbol	Parameter	Min	Тур	Max	Unit
V <sub>I(off)</sub>	Input voltage (V <sub>cc</sub> =5V, I <sub>o</sub> =100 µ A)			0.5	V
V <sub>I(on)</sub>	(V <sub>0</sub> =0.2V, I <sub>0</sub> =5mA)	3.0			V
V <sub>O(on)</sub>	Output voltage (I <sub>0</sub> /I <sub>I</sub> =10mA/0.5mA)		0.1	0.3	V
L.	Input current (V <sub>I</sub> =5V)			0.36	mA
I <sub>O(off)</sub>	Output current (V <sub>CC</sub> =50V, V <sub>I</sub> =0)			0.5	μA
G	DC current gain (V <sub>0</sub> =5V, I <sub>0</sub> =5mA)	56			
R1	Input resistance	15.4	22	28.6	KΩ
$R_2/R_1$	Resistance ratio	0.8	1.0	1.2	
f⊤	Transition frequency (V <sub>CE</sub> =10V, I <sub>E</sub> =5mA, f=100MHz)		250		MHz


#### Equivalent circuit



\*Marking: 25

## DTC124EUA

### **NPN Digital Transistors**

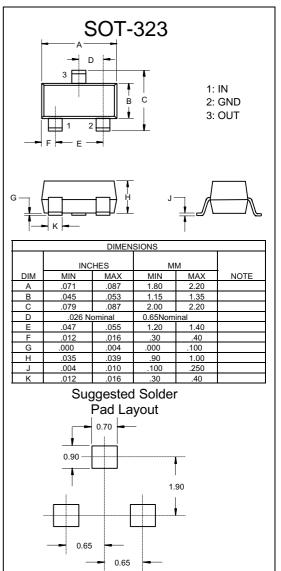

## www.mccsemi.com



### **Ordering Information**

Device	Packing
(Part Number)-TP	Tape&Reel3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

Micro Commercial Components Corp . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp . and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

# www.mccsemi.com