

EP27122A

INTERNATIONAL RECTIFIER


Provisional Data

1BQ SERIES

1A single phase D.I.L. Schottky bridge

FEATURES

- Convenient DIP case design conforming to standard 0.1 inch lead spacing
- Wide operational and storage temperature ranges from -55°C to $+150^{\circ}\text{C}$
- 20 volts and 40 volts VRRM
- 0.65 volts V_f @ 1.0 A per diode
- Moisture Resistant Epoxy Case

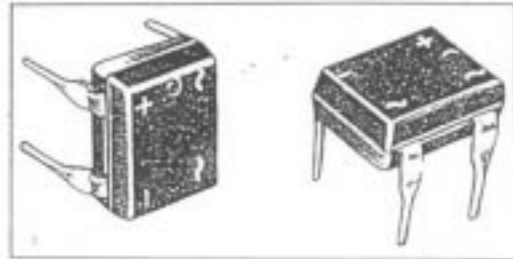


SPECIFICATIONS

ELECTRICAL RATINGS and CHARACTERISTICS

$I_{O(AV)}$	Maximum average output current $T_{amb} = 45^{\circ}\text{C}$	1 A
I_{FSM}	Maximum, peak one cycle, non repetitive forward current 10ms	30 A.
V_{FM}	Maximum peak forward voltage drop per diode, IFM = 1.0 A.	0.65 V
I_{RM}	Typical peak reverse current per diode at rated V_{RRM}	
	$T_a = 25^{\circ}\text{C}$	2.0 mA
	$T_a = 100^{\circ}\text{C}$	5.0 mA

OUTLINE

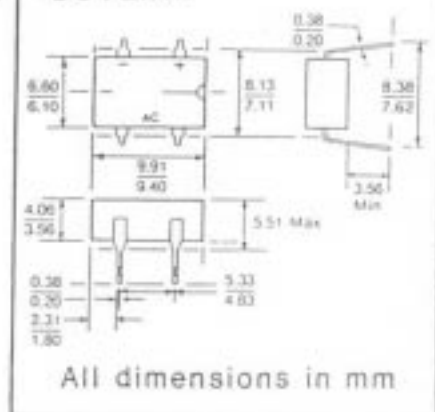

VOLTAGE DATA

Type	V_{RRM} Volts	V_{RRMS} Volts.
1BQ 20	20	14
1BQ 40	40	28

The current flow in a Schottky barrier rectifier is due to majority carrier conduction and is not affected by reverse transients due to stored charge and minority carrier injection as in conventional PN diodes. The Schottky barrier rectifier may be considered for purposes of circuit analysis, as an ideal diode in parallel with a variable capacitance equal in value to the junction capacitance. See Figure 1

THERMAL CONSIDERATIONS:

The derating curve of figure 2 may be used for initial design work.

Thermal runaway is entirely possible on marginal designs due to the inherently large reverse leakage of Schottky barrier rectifiers and the fact that reverse power multiplies about 1.32 times for each 5°C of junction temperature increase.

It is recommended that all designs be verified at an ambient temperature at least 10°C above the maximum at which the equipment will ever have to operate.

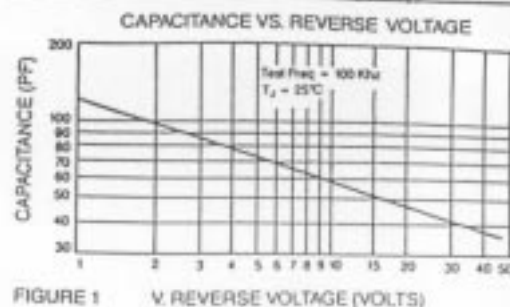


FIGURE 1 V. REVERSE VOLTAGE (VOLTS)

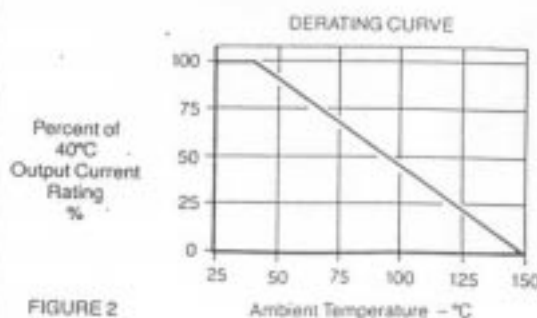


FIGURE 2

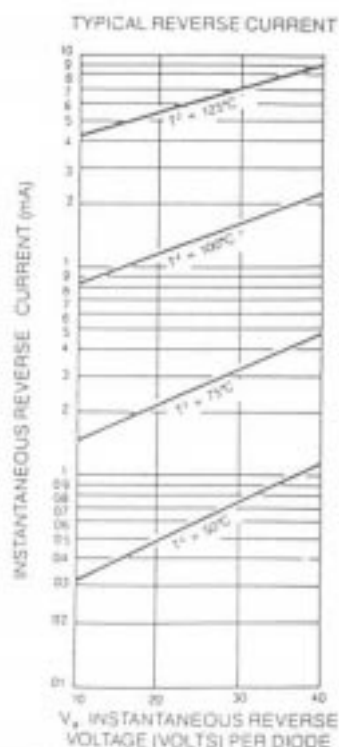


FIGURE 3

INTERNATIONAL RECTIFIER



WORLD HEADQUARTERS: 233 Katuska St., El Segundo, California 90245, USA. Tel: (213) 772-0000. Tlx: 4725402. Fax: (213) 772-9026.
 EUROPEAN HEADQUARTERS: Hurst Green, GATFED, Surrey RH8 9BB, UK. Tel: (0883) 713215. Tlx: 95219. Fax: (0883) 714234.

CANADA: 101 Bentley St., Markham, ONTARIO L3R 3L1. Tel: (416) 475-1897. Tlx: 06/966-650.
 FRANCE: 123 Rue de Petit Vesin, 91360 EPINAY sur ORGE. Tel: (1) 64.54.83.29. Tlx: 602943. Fax: (1) 64.54.83.30.
 GERMANY: 557, D-6300 BAD HOMBURG. Tel: (69) 72 37066. Tlx: 430454. Fax: (69) 72 37065.
 ITALY: Via Liguria 49, 10071 Biadene Cavour, TORINO. Tel: (011) 470 14 84. Tlx: 221257. Fax: (011) 470 42 90.
 Via Karslba 11, 21054 MELANO. Tel: (02) 34 07 9031 29 48.
 Via Arno 1, 40139 BOLOGNA. Tel: (051) 49 33 07.

INDIA: 31 Greenacre, 5 Union Park, Khar IVS, BOMBAY 400 052. Tel: (022) 530265/337795/40342. Tlx: 011/71481.
 JAPAN: R 2 H Bldg. 2F, 3-30-4 Hoshinabukuro, Toshima-ku, TOKYO, Japan 171. Tel: (03) 963 0841. Fax: (03) 963 0642.
 SINGAPORE: 190 Middle Road, HEX 16-01 Fortune Centre, SINGAPORE 0718. Tel: (65) 336 2822/237 4889/236 6280.
 Fax: (65) 337 4897.

SWEDEN: Box 88, S-162 12 Vallerby 1, STOCKHOLM. Tel: (08) 870035. Tlx: 13164. Fax: (08) 874242.
 U.S.A.: 2401 Phun Grove Rd., Suite 111, PALATINE, IL 60067. Tel: (312) 397 0002. Fax: (312) 397 3114.
 CENTRAL ZONE: 71 Grand Ave., PALISADES PARK, NJ 07650. Tel: (201) 943-4554. Tlx: 13-5477. Fax: (201) 943-5754.
 EASTERN ZONE:

Sales Offices, Agents, and Distributors in Major Cities throughout the World.

In the event of product development (R&D) or other activities, INTERNATIONAL RECTIFIER reserves the right to change specifications at any time without notice.