





MKT-Funk-Entstörkondensatoren Klasse Y2, 250 V~
MKT-Radio-Interference Suppression Capacitors – Class Y2, AC 250 V
Condensateurs de type MKT – Classe Y2, c.a. 250 V

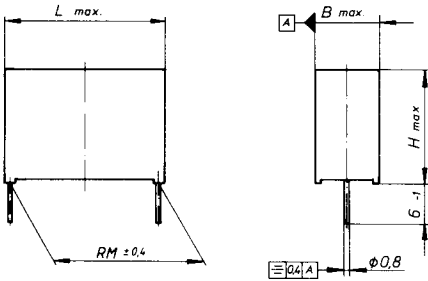

Ausf. / Fig. / ill. A

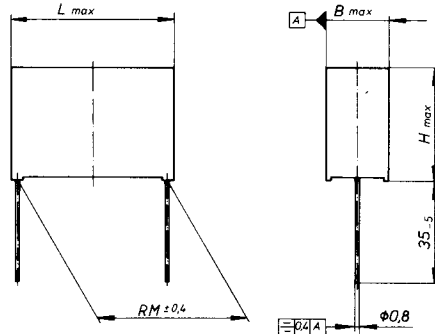

Ausf. / Fig. / ill. B

Kapazität Capacitance Capacité	B (mm)	H (mm)	L (mm)	RM (mm)	Teile-Nr. / Part number / Référence	
					Ausf. / Fig. / ill. A	Ausf. / Fig. / ill. B
1 nF	5	11	18	15	KMT 255/954 – 210/011	KMT 255/954 – 210/030
1,5 nF	5	11	18	15	KMT 255/954 – 215/011	KMT 255/954 – 215/030
2,2 nF	5	11	18	15	KMT 255/954 – 222/011	KMT 255/954 – 222/030
3,3 nF	5	11	18	15	KMT 255/954 – 233/011	KMT 255/954 – 233/030
4,7 nF	6	12	18	15	KMT 255/954 – 247/011	KMT 255/954 – 247/030
6,8 nF	7,5	13,5	18	15	KMT 255/954 – 268/011	KMT 255/954 – 268/030
10 nF	8,5	14,5	18	15	KMT 255/954 – 310/011	KMT 255/954 – 310/030
15 nF	7	15	26,5	22,5	KMT 255/955 – 315/011	KMT 255/955 – 315/030
22 nF	7	15	26,5	22,5	KMT 255/955 – 322/011	KMT 255/955 – 322/030
27 nF	8,5	16,5	26,5	22,5	KMT 255/955 – 327/011	KMT 255/955 – 327/030

Anschlüsse:

Ausf. A
Cu-Draht verzinkt $\varnothing 0,8 \times 6$ mm

Ausf. B
Cu-Draht verzinkt $\varnothing 0,8 \times 35$ mm

Weitere Drahtlängen auf Anfrage.

Connections:

Fig. A
Tinned copper wire $\varnothing 0,8 \times 6$ mm

Fig. B
Tinned copper wire $\varnothing 0,8 \times 35$ mm

Different wire lengths on demand.


Connexions:

ill. A
File cuivre étamé $\varnothing 0,8 \times 6$ mm

ill. B
Fil cuivre étamé $\varnothing 0,8 \times 35$ mm

Autres longueurs de fil sur demande.

Prüfzeichen:
Approvals:
Homologations:



Prüfzeichen beantragt:
Approvals applied for:
Homologations en préparation:

