

# 2.50mm (0.098") PITCH CONNECTOR







**Board-to-Board  
Housing**


**BMH250-NNR Series**

**DIP**

**Right Angle**

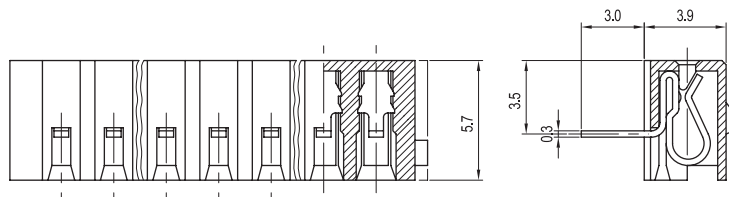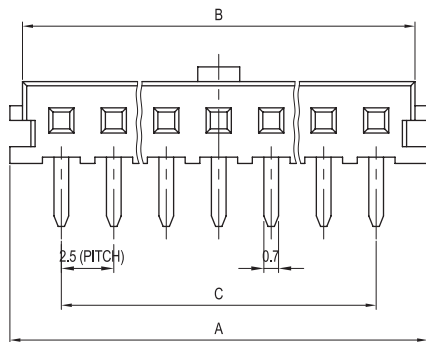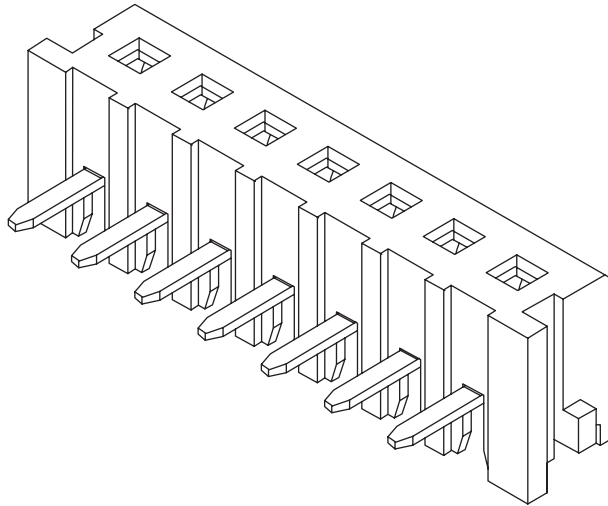

PCB LAYOUT



PCB ASS'Y

## Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	HOUSING	BMH250-NNR	PA66, UL94 V Grade
2	TERMINAL	BMT250(A/T)	Phosphor Bronze & Tin-Plated

## Available Pin

PARTS NO.	A	B	C
BMH250-03R	9.9	8.7	5.0
BMH250-04R	12.4	11.2	7.5
BMH250-05R	14.9	13.7	10.0
BMH250-06R	17.4	16.2	12.5
BMH250-08R	19.9	18.7	15.0
BMH250-09R	22.4	21.2	17.5
BMH250-09R	24.9	23.7	20.0
BMH250-10R	27.4	26.2	22.5
BMH250-11R	29.9	28.7	25.0
BMH250-12R	32.4	31.2	27.5
BMH250-13R	34.9	33.7	30.0
BMH250-14R	37.4	36.2	32.5
BMH250-15R	39.9	38.7	35.0

## Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 2A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	-
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-