


ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

bel
POWER PRODUCTS

07CY-60T Series

- Isolated
- High Efficiency
- High Power Density
- Fix Frequency (300KHz)
- Low Cost
- Input Under Voltage Lockout
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off Logic (Option)
- Output Voltage Trim
- Positive/Negative Remote Sense



Description

The 07CY-60T Series are isolated DC/DC converters that operate from a nominal 48V source. These units provide up to 60W of output power from a nominal 48V input. These units are designed to be highly efficient and low cost. Features include remote on/off, short circuit protection, over current protection, over temperature protection, input under voltage lockout, and output over voltage protection. These converters are provided in an industry standard eighth brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12.0V	36V – 75V	5A	60.0W	91%	07CY-60T120	07CY-60T12L
5.0V	36V – 75V	12A	60.0W	91%	07CY-60T050	07CY-60T05L
3.3V	36V – 75V	15A	50.0W	89%	07CY-60T033	07CY-60T03L

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	80V	
Remote On/Off	-2V	-	18V	
I/O Isolation Voltage	-	-	2000V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-55°C	-	125°C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36V	48V	75V	
Input Current (full load)				
Vo=12.0V	-	-	3.0A	
Vo=5.0V	-	-	2.8A	
Vo=3.3V	-	-	2.6A	
Input Current (no load)				
Vo=12.0V	-	120mA	240mA	
Vo=5.0V	-	80mA	160mA	
Vo=3.3V	-	40mA	80mA	
Remote Off Input Current		2mA	5mA	

ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



Input Specifications (Continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current ¹ (pk-pk)	-	12mA	24mA	
Input Reflected Ripple Current ¹ (RMS)	-	2mA	4mA	
I ² t Inrush Current Transient	-	0.01A ² s	0.02A ² s	
Turn-on Voltage Threshold	32V	34V	35V	
Turn-off Voltage Threshold	30V	32V	33V	

Note: 1. Test conditions: with simulated source impedance of 10uH; use a 100uF/100V electrolytic capacitor with ESR = 1 ohm max. at 5Hz to 20MHz at 25°C.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point Vo=12.0V Vo=5.0V Vo=3.3V	11.820V 4.925V 3.250V	12.0V 5.0V 3.3V	12.180V 5.075V 3.350V	Vin=48V, Io=50% full load, Ta=25°C.
Line Regulation Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±12mV ±5mV ±3mV	±24mV ±10mV ±7mV	
Load Regulation Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±30mV ±10mV ±7mV	±60mV ±20mV ±15mV	
Regulation Over Temperature (-40°C to +85°C) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	±60mV ±45mV ±30mV	±100mV ±75mV ±50mV	
Output Current Vo=12.0V Vo=5.0V Vo=3.3V	0A 0A 0A	- - -	5A 12A 15A	
Current Limit Threshold Vo=12.0V Vo=5.0V Vo=3.3V	5.5A 13.5A 16A	6.5A 16A 18A	8A 19A 20A	
Short Circuit Surge Transient	-	3A ² s	5A ² s	
Ripple and Noise (RMS) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	25mV 25mV 15mV	50mV 50mV 30mV	Test conditions: Vin=48V, Ta=25°C, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.
Ripple and Noise (pk-pk) Vo=12.0V Vo=5.0V Vo=3.3V	- - -	100mV 110mV 55mV	130mV 150mV 100mV	
Turn on Time	-	10mS	25mS	
Overshoot at Turn on	-	0%	5%	
Output Capacitance Vo=12.0V Vo=5.0V Vo=3.3V	0uF 0uF 0uF	- - -	1000uF 10000uF 18000uF	

ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



Output Specifications (Continued)

Parameter		Min	Typ	Max	Notes		
Transient Response							
25% ~ 50% Max Load	Overshoot	Vo=12.0V	-	300mV	400mV	Test conditions: di/dt = 0.1A/uS, Vin=48V, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.	
	Settling Time		-	400uS	500uS		
50% ~ 25% Max Load	Overshoot		-	300mV	400mV		
	Settling Time		-	400uS	500uS		
25% ~ 50% Max Load	Overshoot		Vo=5.0V	-	200mV		300mV
	Settling Time			-	300uS		400uS
50% ~ 25% Max Load	Overshoot	-		200mV	300mV		
	Settling Time	-		300uS	400uS		
25% ~ 50% Max Load	Overshoot	Vo=3.3V		-	150mV		200mV
	Settling Time			-	150uS		200uS
50% ~ 25% Max Load	Overshoot		-	150mV	200mV		
	Settling Time		-	150uS	200uS		

Note: All specifications are typical at 25°C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes	
Efficiency					
	Vo=12.0V	88%	91%	-	Vin=48V, full load
	Vo=5.0V	88%	91%	-	
	Vo=3.3V	87%	89%	-	
Switching Frequency	270KHz	300KHz	330KHz		
Isolation capacitance	-	1500pF	-		
Output Voltage Trim Range	80%Vo	-	110%Vo		
Over Temperature Protection	-	125°C	-		
Over Voltage Protection	117%Vo	122%Vo	127%Vo		
MTBF	2,410,000 hours			Calculated Per Bell Core TR-332 (Io = 12A, Vin=48V, Vo=3.3V, Ta = 25°C, No forced air)	
Dimensions					
	Inches (L x W x H)	2.30 x 0.896 x 0.395			
	Millimeters (L x W x H)	58.42 x 22.86 x 10.04			
Weight	-	20g	-		

Note: All specifications are typical at 25°C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes	
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3V	-	0.8V	The remote on/off pin open, Unit on.
Signal High (Unit Off)		2.4V	-	18V	
Signal Low (Unit Off)	Active High	-0.3V	-	0.8V	
Signal High (Unit On)		2.4V	-	18V	
Current Sink		0mA	-	0.75mA	

ISOLATED DC/DC CONVERTERS


48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

bel
POWER PRODUCTS


Output Trim Equations

Equations for calculating the trim resistor (in kΩ) are shown below. The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

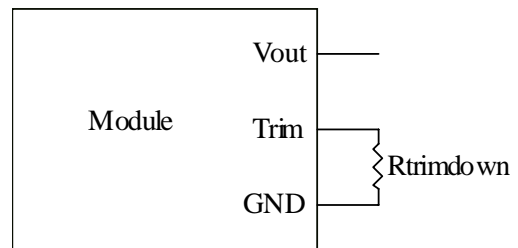

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

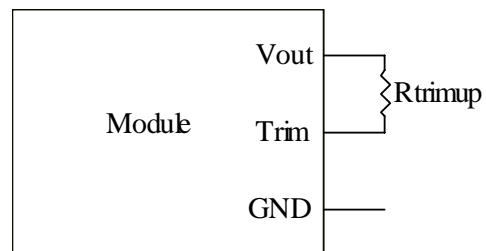

Notes:

$$\delta = \frac{(V_o - req - V_o)}{V_o} \times 100[\%]$$

V_{o_req}=Desired (trimmed) output voltage [V]




Output voltage V_o=3.308V for 3.3V output; V_o=5.002V for 5.0V; V_o=12.007V for 12V output

ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick



Efficiency Data

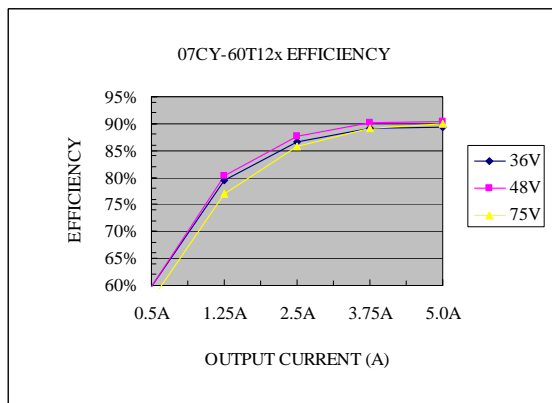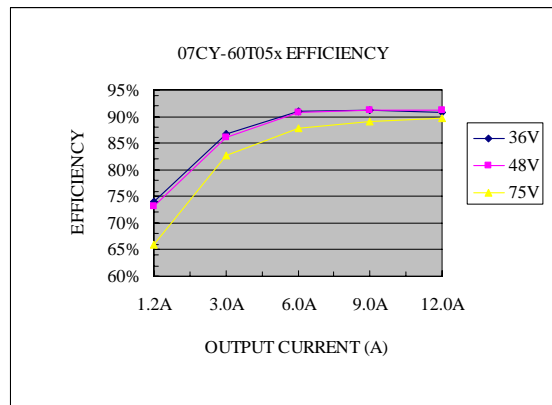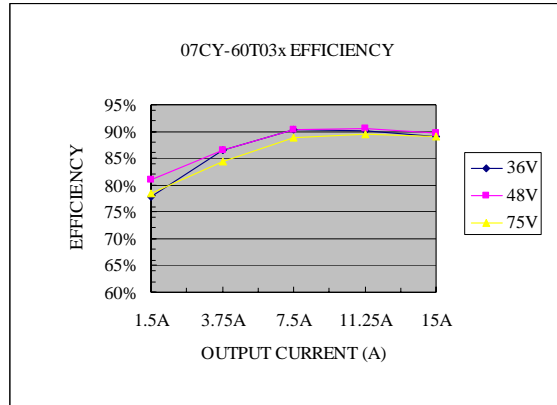


ISOLATED DC/DC CONVERTERS


48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick




Thermal Derating Curves (Vin=48V)

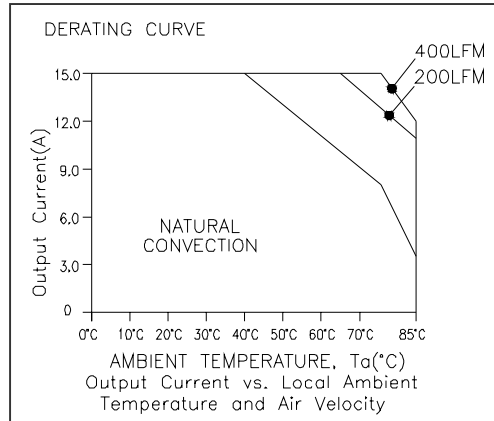

07CY-60T03x

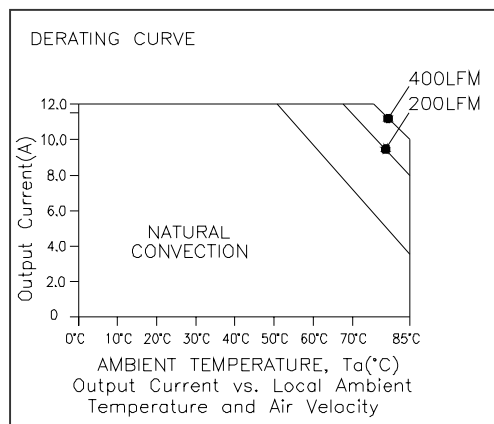





07CY-60T05x

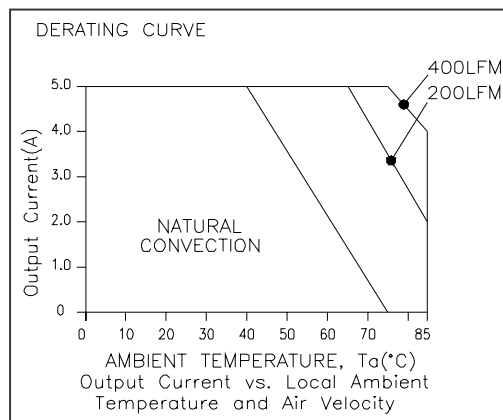

07CY-60T12x

ISOLATED DC/DC CONVERTERS

48V Input 3.3V/15A, 5V/12A, 12V/5A Output, 1/8 Brick

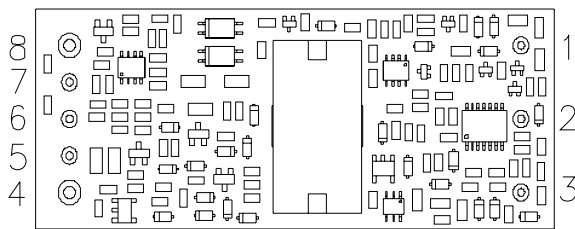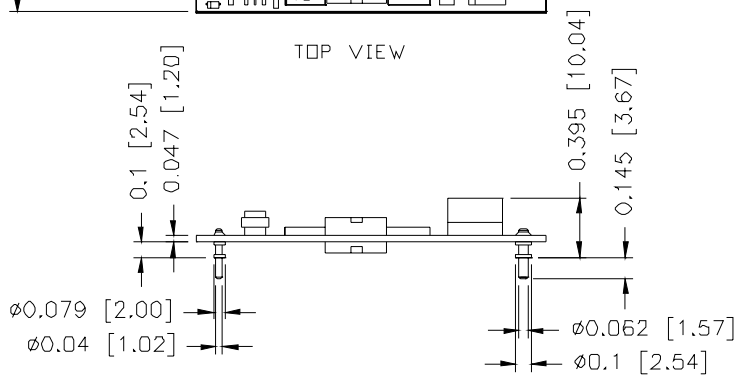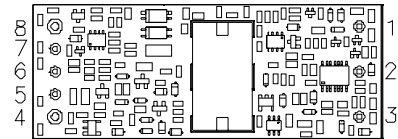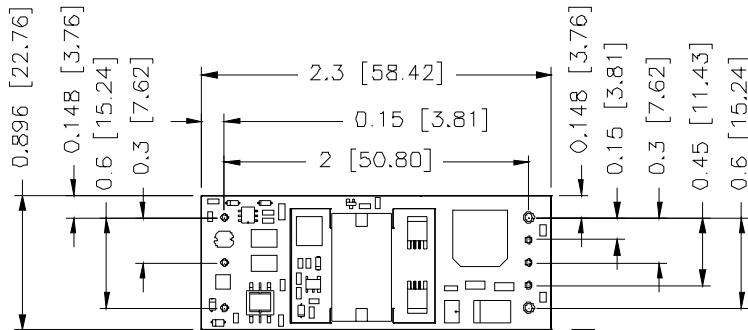

Pin Connections

Pin	Function
1	Vin+
2	Remote On/Off
3	Vin-
4	Vout-
5	Sense-
6	Trim
7	Sense+
8	Vout+

©2004 Bel Fuse Inc. Specifications subject to change without notice. 120804

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com