


**5994S Series Panel Mounted LED Indicator Light**

**DESCRIPTION AND FEATURES**

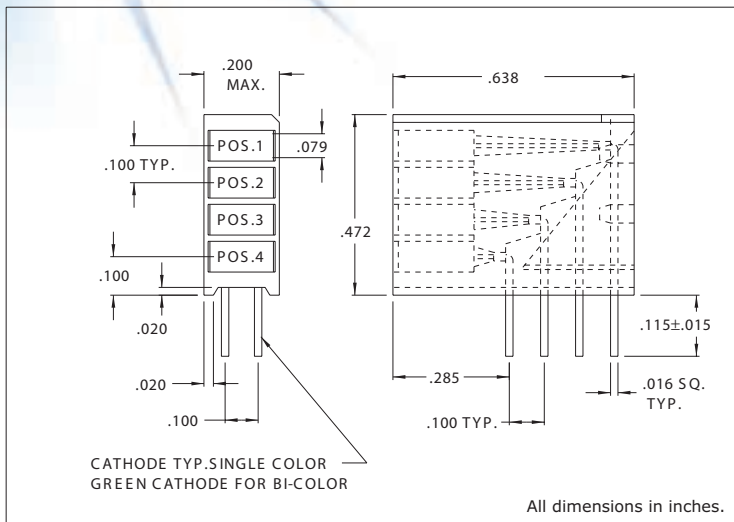

**Features**

- 4 LEDs stack mounted in single block saves space and assembly time.
- Super Brite light output
- Standoffs prevent flux entrapment.
- Black plastic mounting block for high contrast ratio.
- Meets UL 94V-0 and Bellcore flammability specifications.
- Assembly can also be supplied in various color combinations. Call factory for details.

**ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS**

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)	Peak Forward Current @ 1ms-300 PPS (A)
					Typ. (V)	Max. (V)			
5994S 1;1;1;1	Red	10	10	30	2.2	3.0	5	650	-
5994S 5;5;5;5	Green	16	10	30	2.3	3.0	5	562	-
5994S 7;7;7;7	Yellow	6.3	10	30	2.2	3.0	5	585	-