


Type 5SF / 5SFP

5 x 20mm Glass Tube
RoHS Compliant

Quick-acting Fuse Series (Low Breaking Capacity)

5SFD0106

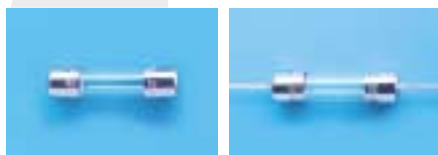

Electrical Characteristics (IEC-127-2 STANDARD SHEET 2)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MAX
80mA to 100mA	1	30	10	0.5	3	100	20		
125mA to 6.3A	1	30	50	2	10	300	20		
8A to 10A	1	30	50	2	10	400	40		
	hr.	min.	ms	sec	ms	ms	ms		

Approvals

Safety Agency Approvals	Amp range / Volt @ I.R. ability
Certificate No. 0035174 / 0046197 Licence No. 40000509 Certificate No. EM234	80mA - 6.3A / 250V AC@ 35A or 10 In whichever is greater
Recognized File No. E20624 Acceptance File No. LR39772	80mA - 10A / 250V AC@ 35A or 10 In whichever is greater
Licence No. 2003010207030263	80mA - 6.3A / 250V AC@ 35A or 10 In whichever is greater

RoHS Compliant Product

For RoHS Compliant Version, add suffix "R" after catalog number

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Glass body / Nickel Plated Brass Caps

Lead wire:

Tin plated Copper alloy,

Diameter 0.032", 6.3A and less

Diameter 0.040", 8A and above

Marking

On fuse:

"bel", "F", "Current Rating", "L", "250V", "Appropriate Safety Logos" and "✓" (RoHS Version)

On label:

"bel", "5SF", or "5SFP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "✓" + suffix "R" for RoHS Version

Packaging

1. In bulk:

5SF - 1,000 pcs per box; 5SFP - 500 pcs per box

2. On Axial Tape & Reel:

1,500 pcs per reel

3. Tape & Reel specification:


per EIA-296-E & IEC 286-1

@ 10mm Pitch and 63.5mm inside Tape Spacing

Catalog Number	RoHS Suffix	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Melting I ² T < 10 mSec (A ² Sec)	Melting I ² T @10 In (A ² Sec)	Maximum Power Dissipation (W)
5SF (P) 80	-R	80mA	6.80	0.93	0.003	0.003	0.39
5SF (P) 100	-R	100mA	4.90	0.84	0.005	0.005	0.44
5SF (P) 125	-R	125mA	3.50	0.76	0.009	0.008	0.50
5SF (P) 160	-R	160mA	2.50	0.68	0.017	0.015	0.57
5SF (P) 200	-R	200mA	1.10	0.44	0.030	0.028	0.64
5SF (P) 250	-R	250mA	0.95	0.40	0.05	0.05	0.73
5SF (P) 315	-R	315mA	0.50	0.35	0.10	0.09	0.83
5SF (P) 400	-R	400mA	0.44	0.32	0.17	0.17	0.94
5SF (P) 500	-R	500mA	0.32	0.28	0.40	0.40	1.12
5SF (P) 630	-R	630mA	0.15	0.15	0.64	0.65	1.15
5SF (P) 800	-R	800mA	0.11	0.14	1.01	1.04	1.20
5SF (P) 1	-R	1A	0.090	0.13	1.6	1.7	1.27
5SF (P) 1.25	-R	1.25A	0.062	0.12	2.5	2.7	1.35
5SF (P) 1.6	-R	1.6A	0.050	0.12	4.0	4.4	1.47
5SF (P) 2	-R	2A	0.036	0.11	6.4	7.0	1.62
5SF (P) 2.5	-R	2.5A	0.026	0.11	10	11	1.82
5SF (P) 3.15	-R	3.15A	0.022	0.10	16	18	2.08
5SF (P) 4	-R	4A	0.017	0.10	26	30	2.43
5SF (P) 5	-R	5A	0.012	0.09	41	48	2.89
5SF (P) 6.3	-R	6.3A	0.010	0.09	65	74	3.50
5SF (P) 8	-R	8A	0.007	0.08	103	119	4.30
5SF (P) 10	-R	10A	0.006	0.08	163	192	5.37

Consult manufacturer for other ratings

Mechanical Dimensions

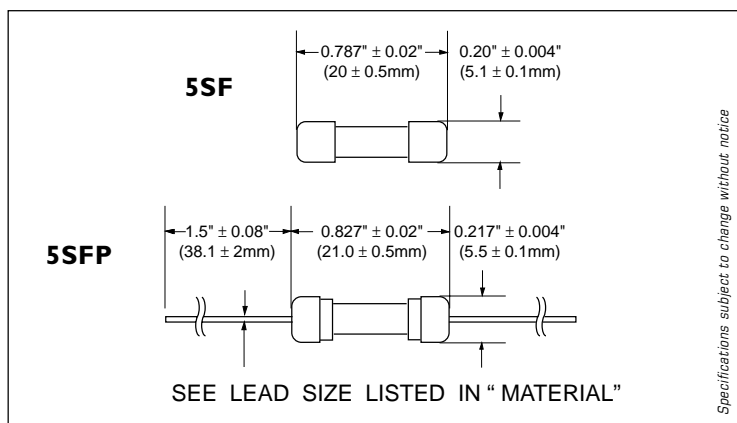

Specifications subject to change without notice

ORDERING INFORMATION SEE LAST 2 PAGES


Type 5SF / 5SFP

5 x 20mm Glass Tube
RoHS Compliant

Quick-acting Fuse Series (Low Breaking Capacity)

5SFC1005

5SF / 5SFP - TIME CURRENT CHARACTERISTIC CURVE

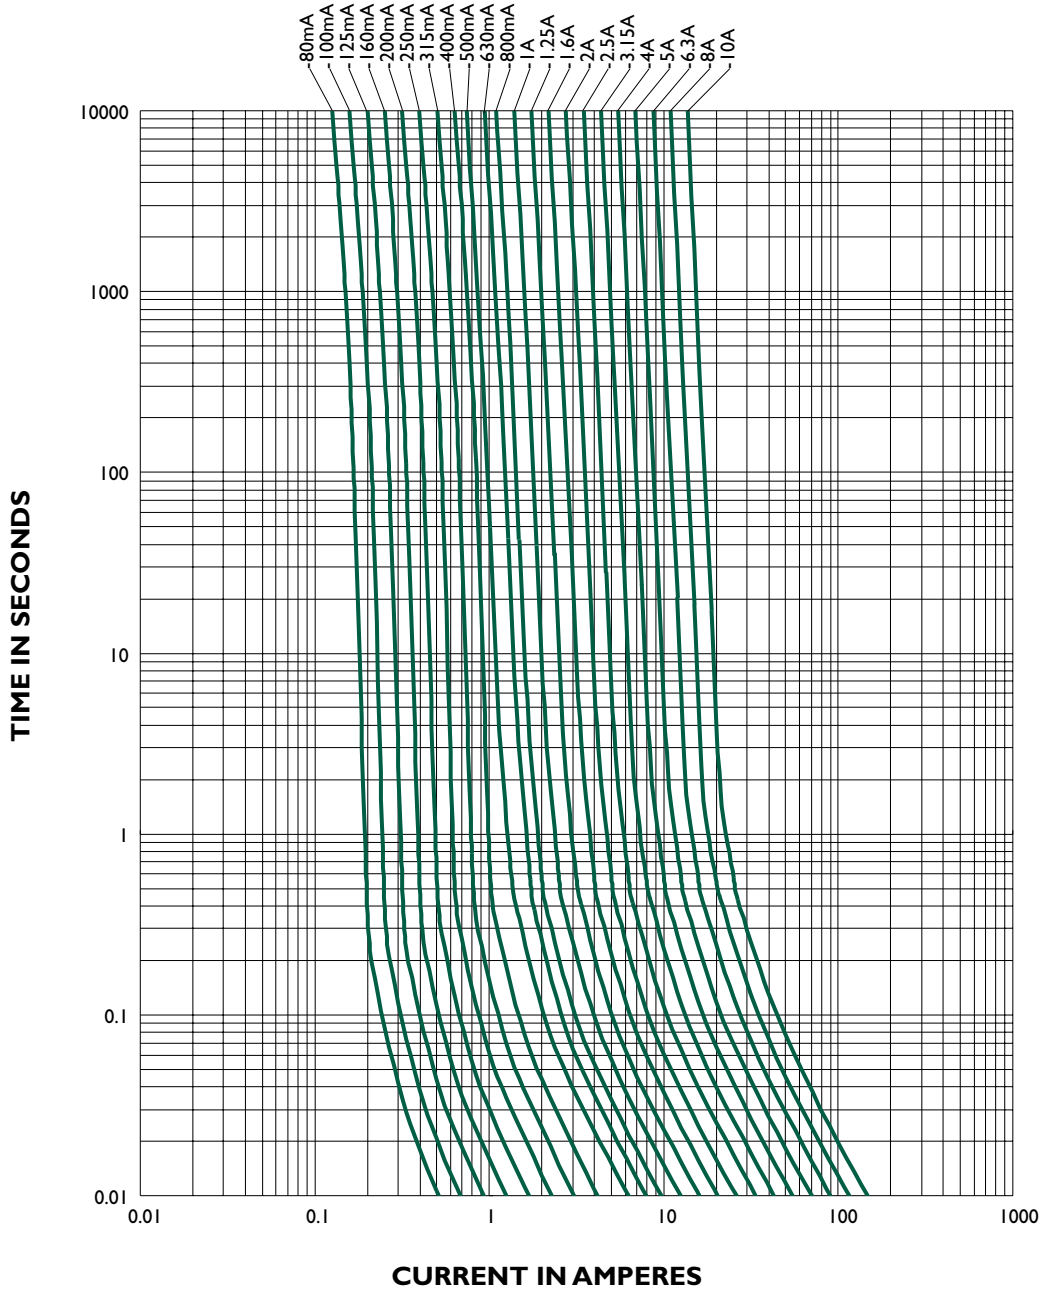

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office

Bel Fuse Inc.
206 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: belfuse@belfuse.com
Website: www.belfuse.com

Far East Office

Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K
Tel: 44-1772-556601
Fax: 44-1772-888366