
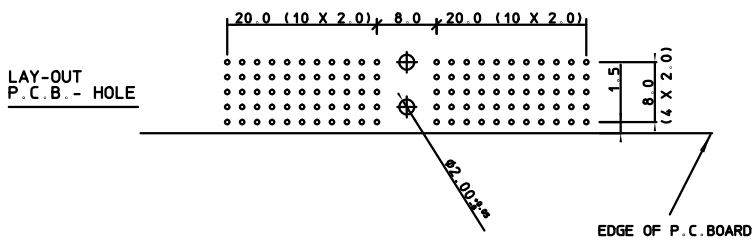
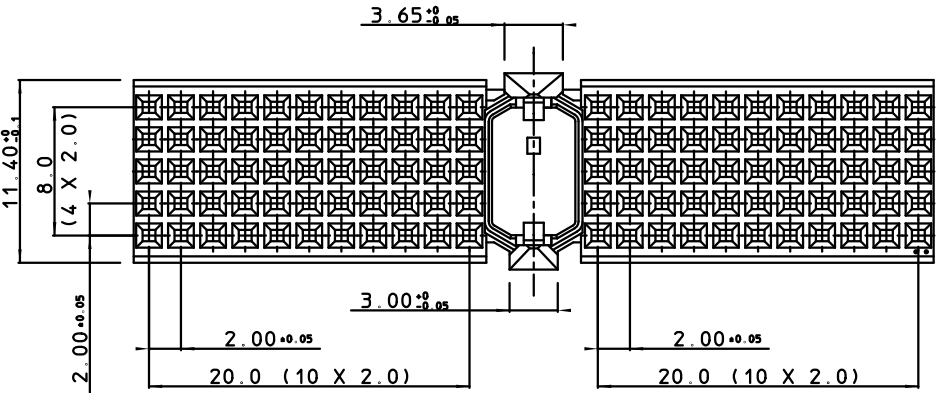
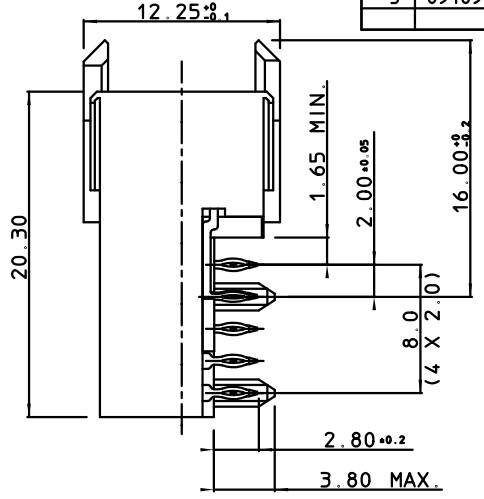


BS,C ,201418,001,03

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90	REV.	DATE	DESCRIPTION	BY	C'K'D'																
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	76	81	82	83	84	88	1	221292	DIM. MODIFIED	WP	
																															2	060494	CONVERSION ME10	W.P.	
																															3	091095	NOTE 2 ADDED	W.P.	

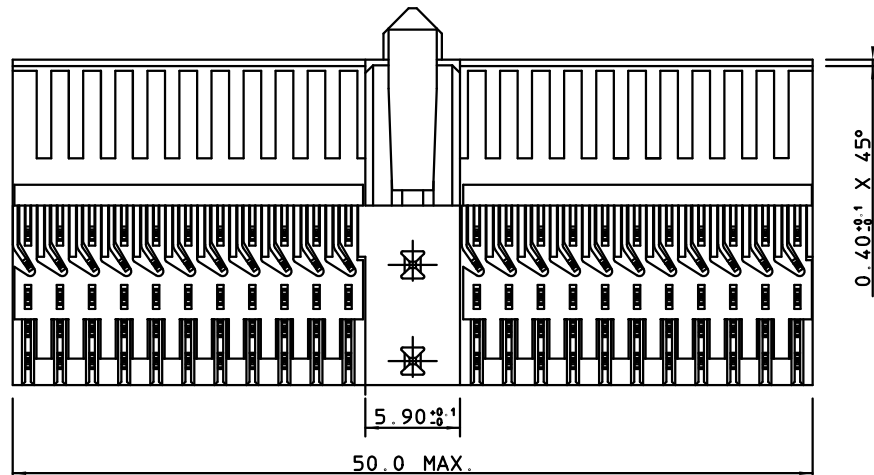

PERFORMANCE CHARACTERISTICS

CURRENT RATING : 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT / CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 mΩ MAX
 INSERTION FORCE : 0.75 N MAX / CONT
 EXTRACTION FORCE : 0.15 N MIN / CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

1. "..." PERFORMANCE LEVEL INDICATION: Z1- PL3
 (SEE CAT. NR.) N9- PL2
 E9- PL1

2. CSA CERTIFIED, FILE NUMBER LR 44961-51.
 UL APPROVED, FILE NUMBER E31151.

FEMALE SIGNAL RIGHT ANGLE PRESS-FIT-TO-BOARD CONNECTOR				
WITH SERVICECENTER				
1DEC ±0.2 1DEC	APPR.	DATE	SIGN.	MILLIPACS 2 / TYPE A / NO SHIELDING
2DEC ±0.1 2DEC	DRAFT	4 2 92	J. V. B.	CAT. No. HM2R01PA5100--
ANGLES ±1° HOEKEN	CHECKED			SCALE
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.			FRAMATOME CONNECTORS BELGIUM N.V. A. SPINOYSTRAAAT 8, 2800 MECHELEN
	PR. ENG. MGR.			
ALL DIMENSIONS IN MM	PR. MGT. MGR.			
	REFERENCES / REFERENTIES			
ALLE AFMETINGEN IN MM	BS,C ,201418,001,03			
	DRAWING No. CUSTOMER DRAWING			

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE.

DIT IS ONZE EIGENDOM EN MAG NIET NADERHAANT, HERDRUKT, OVERGEDRUKT AAN DEREN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS TERUGZENDING VERPLICHT.