



**Voltage Ratings**

Part number	15CLQ100
$V_R$ Max. DC Reverse Voltage (V) (Per Leg)	100
$V_{RWM}$ Max. Working Peak Reverse Voltage (V) (Per Leg)	

**Absolute Maximum Ratings**

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 5	15	A	50% duty cycle @ $T_C = 100^\circ\text{C}$ , rectangular waveform
$I_{FSM}$ Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	250	A	@ $t_p = 8.3$ ms half-sine

**Electrical Specifications**

Parameters	Limits	Units	Conditions	
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1 ①	0.67	V	@ 5.0A	$T_J = 25^\circ\text{C}$
	0.9	V	@ 15A	
	0.53	V	@ 5.0A	$T_J = 125^\circ\text{C}$
	0.72	V	@ 15A	
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) See Fig. 2 ①	0.5	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$
	15	mA	$T_J = 125^\circ\text{C}$	
$C_T$ Max. Junction Capacitance (Per Leg)	600	pF	$V_R = 5V_{DC}$ ( 1MHz, $25^\circ\text{C}$ )	
$L_S$ Typical Series Inductance (Per Leg)	5.9	nH	Measured from center of cathode pad to center of anode pad	

**Thermal-Mechanical Specifications**

Parameters	Limits	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Leg)	1.67	$^\circ\text{C}/\text{W}$	DC operation See Fig. 4
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Package)	0.83	$^\circ\text{C}/\text{W}$	DC operation
wt Weight (Typical)	2.4	g	
Die Size	125X125	mils	
Case Style	SMD-1		

① Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

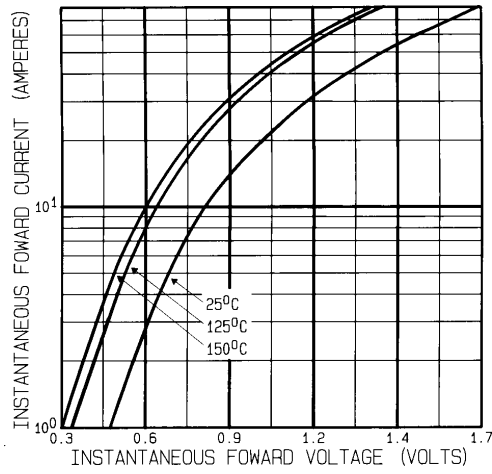


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

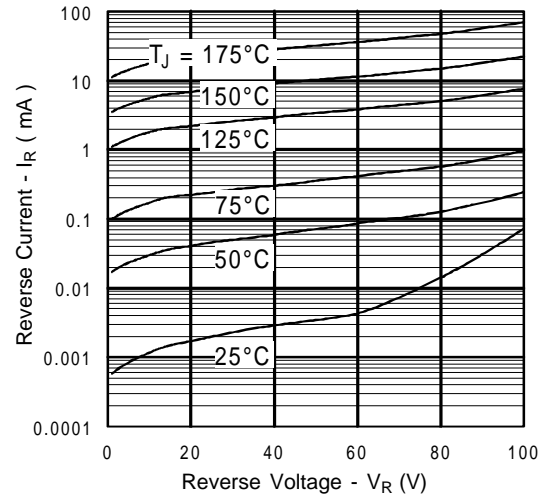


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

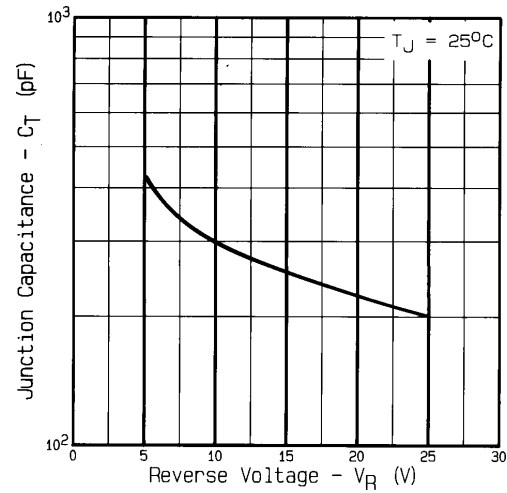


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

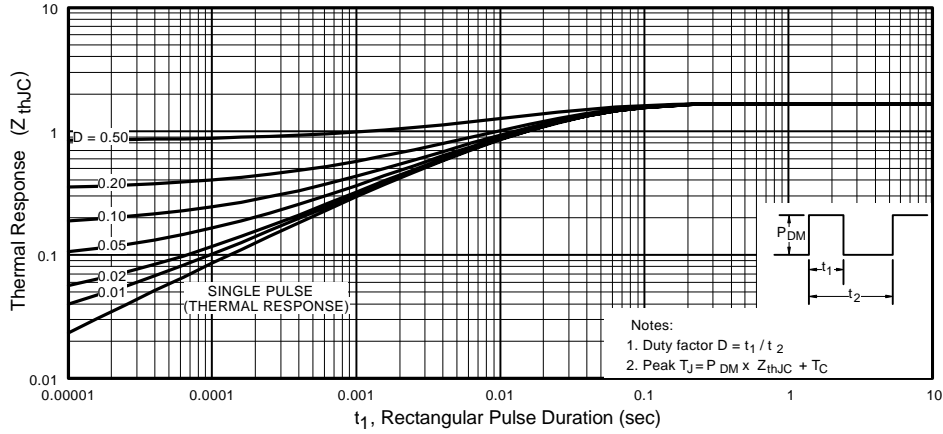


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

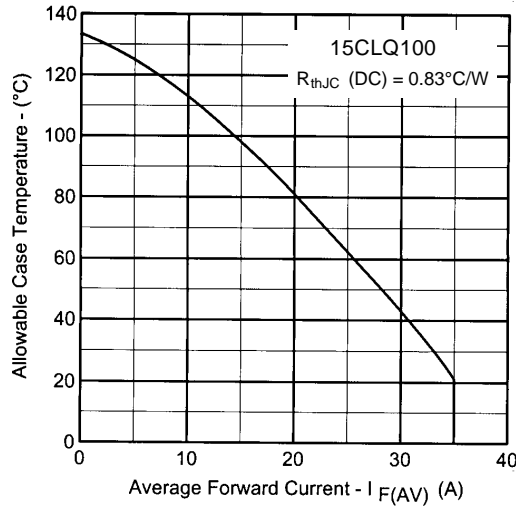


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.