


SILICON NPN POWER DARLINGTON TRANSISTOR

- STMicroelectronics PREFERRED SALES TYPE
- NPN DARLINGTON
- HIGH CURRENT CAPABILITY
- INTEGRATED ANTIPARALLEL COLLECTOR-EMITTER DIODE

DESCRIPTION


The device is a silicon epitaxial-base NPN power transistor in monolithic Darlington configuration mounted in Jedec TO-220 plastic package.

It is intended for use in low and medium frequency power applications.

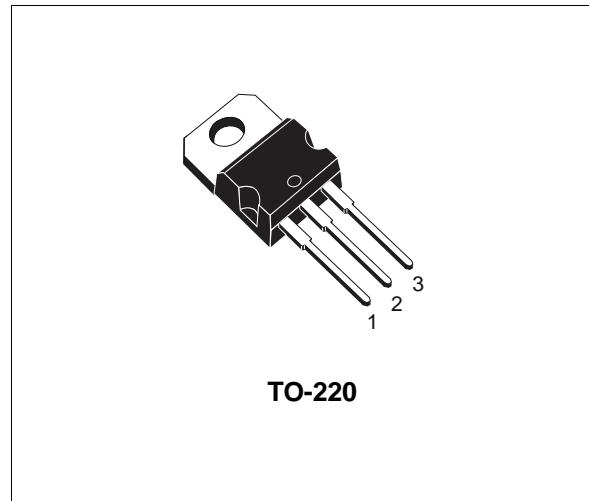

TO-220

INTERNAL SCHEMATIC DIAGRAM



R₁ Typ. = 10 KΩ R₂ Typ. = 160 Ω

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage (I _B = 0)	80	V
V _{CEV}	Collector-Emitter Voltage (V _{BE} = -1.5V)	80	V
V _{CER}	Collector-Emitter Voltage (R _{BE} ≤ 100Ω)	80	V
V _{CEO}	Collector-Emitter Voltage (I _B = 0)	80	V
V _{EBO}	Emitter-Base Voltage (I _C = 0)	5	V
I _C	Collector Current	10	A
I _{CM}	Collector Peak Current	15	A
I _B	Base Current	0.25	A
P _{tot}	Total Dissipation at T _c ≤ 25 °C	65	W
T _{stg}	Storage Temperature	-65 to 150	°C
T _j	Max. Operating Junction Temperature	150	°C

2N6388

THERMAL DATA

R _{thj-case}	Thermal Resistance Junction-case	Max	1.92	°C/W
-----------------------	----------------------------------	-----	------	------

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CEV}	Collector Cut-off Current ($V_{BE} = -1.5\text{V}$)	$V_{CE} = \text{rated } V_{CEO}$ $V_{CE} = \text{rated } V_{CEO} \quad T_c = 125^{\circ}\text{C}$			0.3 3	mA mA
I _{CEO}	Collector Cut-off Current ($I_B = 0$)	$V_{CE} = 80\text{ V}$			1	mA
I _{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5\text{ V}$			5	mA
V _{CEO(sus)*}	Collector-Emitter Sustaining Voltage	$I_C = 200\text{ mA}$	80			V
V _{CER(sus)*}	Collector-Emitter Sustaining Voltage	$I_C = 200\text{ mA} \quad R_{BE} = 100\Omega$	80			V
V _{CEV(sus)*}	Collector-Emitter Sustaining Voltage	$I_C = 200\text{ mA} \quad V_{BE} = -1.5\text{V}$	80			V
V _{CE(sat)*}	Collector-Emitter Saturation Voltage	$I_C = 5\text{ A} \quad I_B = 10\text{ mA}$ $I_C = 10\text{ A} \quad I_B = 100\text{ mA}$			2 3	V V
V _{BE*}	Base-Emitter Voltage	$I_C = 5\text{ A} \quad V_{CE} = 3\text{ V}$ $I_C = 10\text{ A} \quad V_{CE} = 3\text{ V}$			2.8 4.5	V V
h _{FE*}	DC Current Gain	$I_C = 5\text{ A} \quad V_{CE} = 3\text{ V}$ $I_C = 10\text{ A} \quad V_{CE} = 3\text{ V}$	1000 100		20000	
h _{fe}	Small Signal Current Gain	$I_C = 1\text{ A} \quad V_{CE} = 10\text{ V} \quad f = 1\text{MHz}$ $I_C = 1\text{ A} \quad V_{CE} = 10\text{ V} \quad f = 1\text{KHz}$	20 1000			
V _{F*}	Parallel-diode Forward Voltage	$I_F = 10\text{ A}$			4	V
C _{CB0}	Collector Base Capacitance	$I_E = 0 \quad V_{CB} = 10\text{ V} \quad f = 1\text{MHz}$			200	pF
I _{s/b**}	Second Breakdown Collector Current	$V_{CE} = 25\text{ V}$	2.6			A
E _{s/b}	Second Breakdown Energy	$L = 12\text{ mH} \quad R_{BE} = 100\Omega$ $V_{BE} = -1.5\text{ V} \quad I_C = 4.5\text{ A}$	120			mJ

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %

** Pulsed: Pulse duration = 100ms non repetitive pulse.

TO-220 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

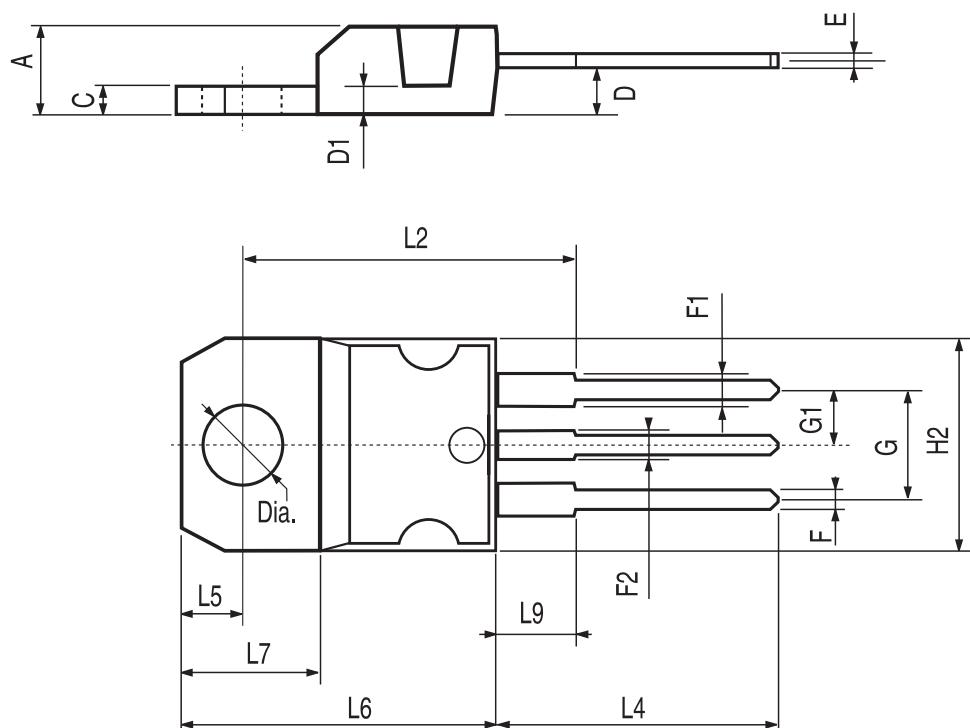

P011C

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

<http://www.st.com>