

---

# HVC355B

Variable Capacitance Diode for VCO

# HITACHI

ADE-208-416(Z)

Rev 0

October 1996

---

## Features


- High capacitance ratio. ( $n = 2.20$ .min)
- Low series resistance. ( $r_s = 0.6\Omega$ max)
- Ultra small Flat Package (UFP) is suitable for surface mount design.

## Ordering Information

Type No.	Laser Mark	Package Code
HVC355B	B1	UFP

---

## Outline

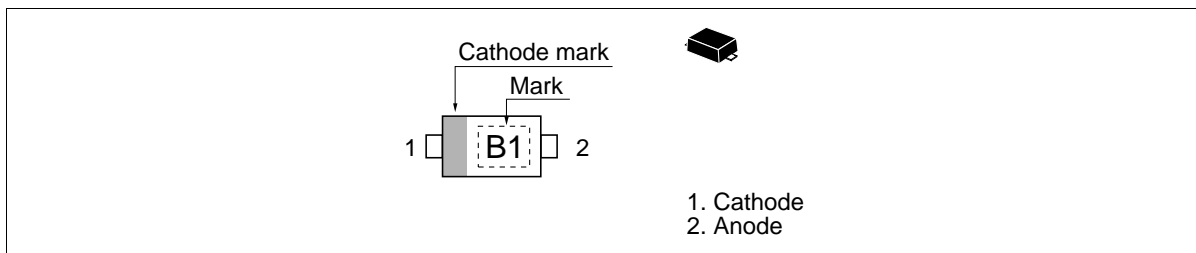

---

## HVC355B

---

### Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit
Reverse voltage	VR	15	V
Junction temperature	Tj	125	°C
Storage temperature	Tstg	-55~+125	°C

### Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse current	IR1	~	~	10	nA	VR = 15V
	IR2	~	~	100		VR = 15V, Ta =60°C
Capacitance	C1	6.40	~	7.20	pF	VR = 1V, f = 1 MHz
	C4	2.55	~	2.95		VR = 4V, f = 1 MHz
Capacitance ratio	n	2.20	~	~	~	C1 / C4
Series resistance	rs	~	~	0.6	Ω	VR = 1V, f = 470 MHz

Main Characteristic

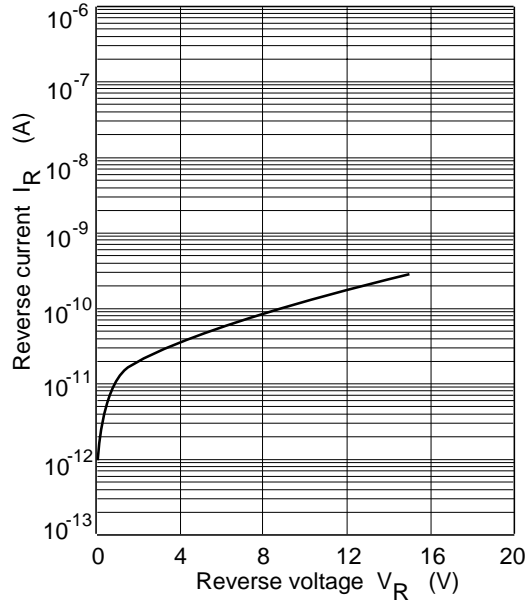


Fig.1 Reverse current Vs. Reverse voltage

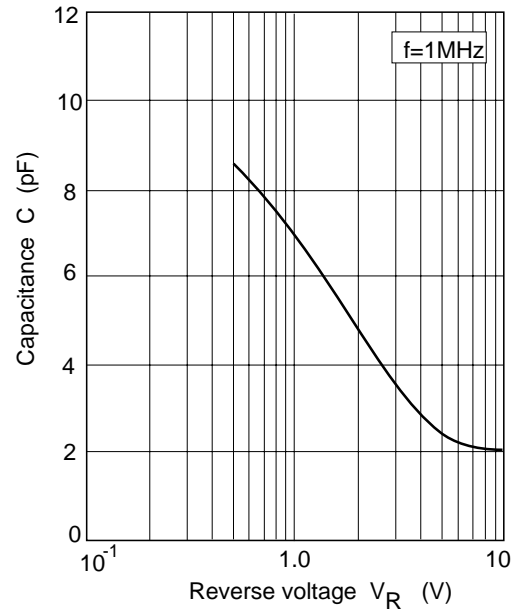


Fig.2 Capacitance Vs. Reverse voltage

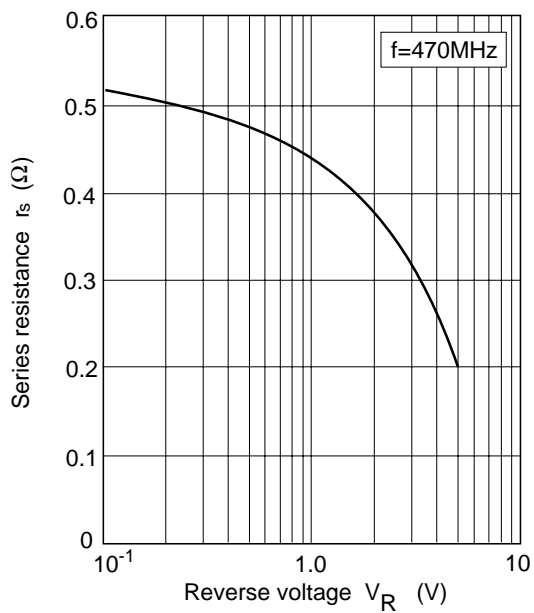


Fig.3 Series resistance Vs. Reverse voltage

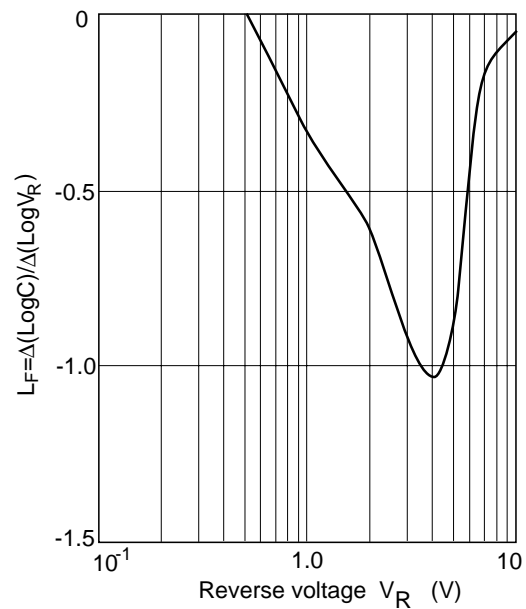


Fig.4  $L_F$  Vs. Reverse voltage

---

# HVC355B

---

## Package Dimensions

Unit : mm

