


DSL Network Module

RADSL-LP CP

VAP00103


- Complete miniaturized analog transmitter and receiver for the RADSL-LP customer premises (CP) application
- +15 dBm differential transmit signal power into a 100 Ω termination
- Operating temperature -40° to 85° C
- Single power supply voltage
- Low power (Pd) dissipation
- Surface mount packaging

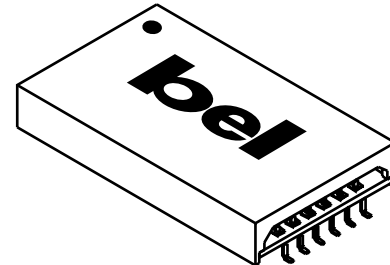

ELECTRICAL SPECIFICATIONS AT 25° C


0803-1439-01	Min	Max
Absolute Maximum Ratings		
Power supply voltage to AGND	-0.3V	+6.0V
Storage temperature	-40° C	+125° C
Recommended Maximum Operating Conditions		
Power supply voltage	+4.75V	+5.25V
Operating temperature (non condensing)	-40° C	+85° C
EDS Threshold (Highest Passing Voltage)		
Human body model (all pins)	> 500V	
General Characteristics		
Transmit path gain variation (laser trimmed)	----	±0.25dB
Power dissipation (varies with baud rate)	375 mW typ	
Package type	12-pin SMD	

BLOCK DIAGRAM

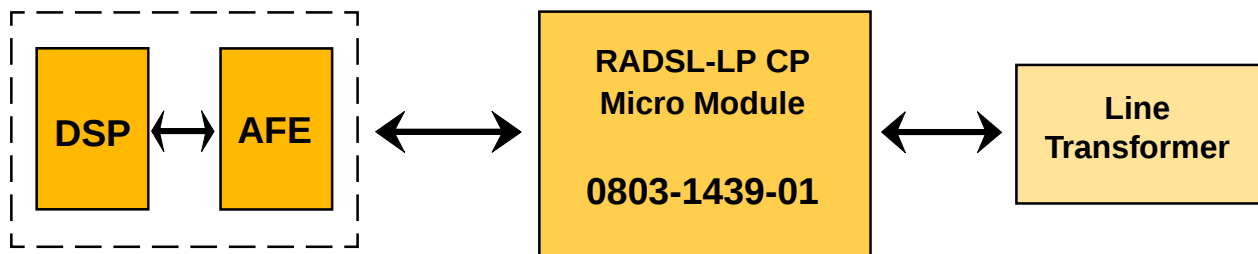

MECHANICAL

0803-1439-01

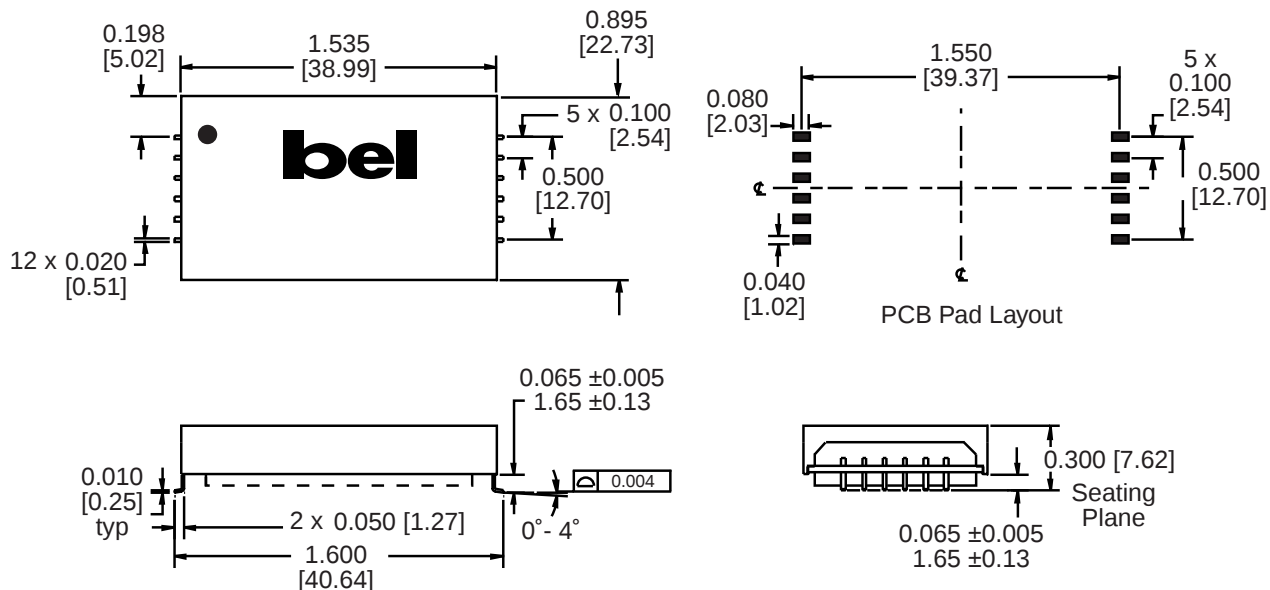

Dimensions are in inches [millimeters].
Standard dimension tolerance is ±0.010 [0.25] unless otherwise noted.

Pin	Function	Description
1	N/C	No Connection
2	TXFL1	Transmit Signal 1
3	TXFL2	Transmit Signal 2
4	ATTEN	Receive Attenuation, Receive Mode Select
5	PGA1	Receive Signal Output 1
6	PGA2	Receive Signal Output 2
7	RCV2	Receive Signal Input 2
8	RCV1	Receive Signal Input 1
9	LO1	Transmit Signal Output 1
10	LO2	Transmit Signal Output 2
11	+5A	+5VA Analog Supply Voltage
12	AGND	Analog Circuit Ground

©2000 Bel Fuse Inc. Specifications subject to change without notice. 06.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com