

140FF- 2Z- C3-3

RELAY SOCKET



CE

C US

File No.:E253370

Screw terminal,
DIN rail / Screw mounted,
with finger protection device

CHARACTERISTICS



- Ambient temperature : -40 °C to 70°C
- Rated voltage: 300VAC
- Rated current : 12A (per pole)
- Insulation voltage (Min.) : 5000VAC
- Protection degree DIN40050 : IP20
- Socket material : PA66+GF V0 (UL)
- Contacts spring material : H65Y
- Plastic retainer : available
- White plastic tag : available
- Modules (on request) : HFHAA to HFHHU module available
- Terminal torque : 0.6Nm
- Wire strip length : 7mm

Applicable relay type:
suit for HF14FW(JQX-14FW) /HF140FF(JZX-140FF) (Relay height 26.3mm, 25.5mm).


DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm



Outline Dimensions

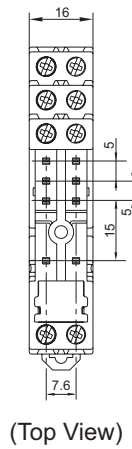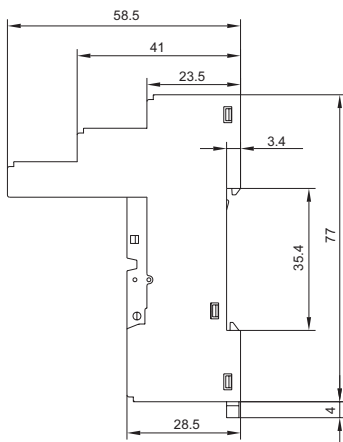

Wiring Diagram

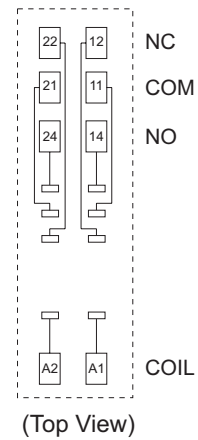

Retainer Dimensions

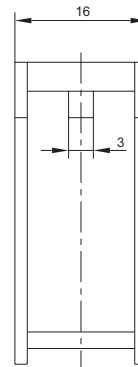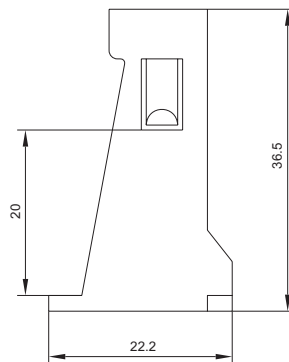

HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00