


Major Ratings and Characteristics

Characteristics	52CPQ030	Units
$I_{F(AV)}$ Rectangular waveform	50	A
V_{RRM}	30	V
I_{FSM} @tp = 5 μ s sine	2180	A
V_F @25 Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.38	V
T_J range	-55 to 150	$^\circ\text{C}$

Description/Features

The 52CPQ030 center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

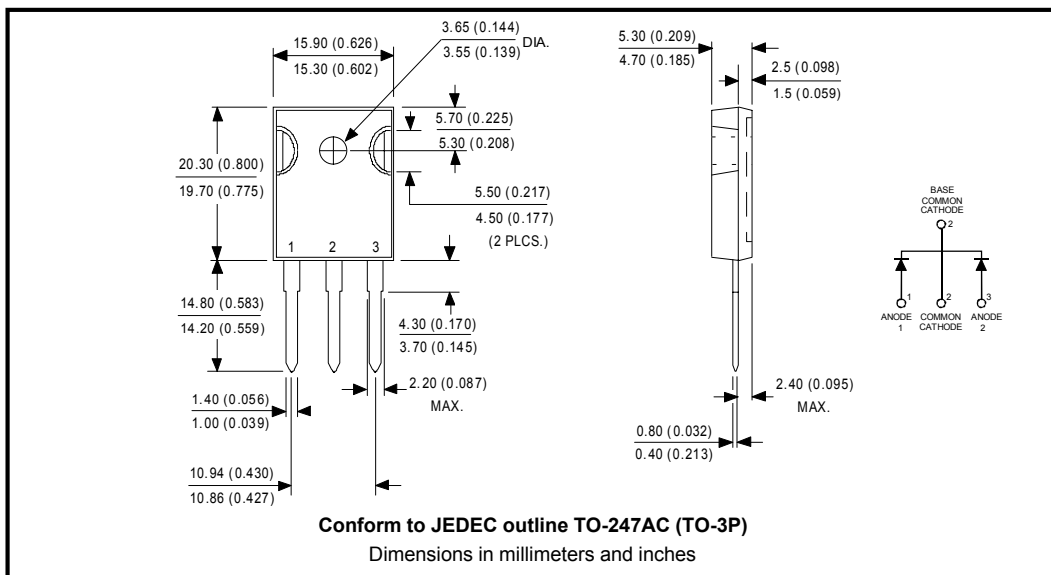

Voltage Ratings

Part number	52CPQ030
V _R Max. DC Reverse Voltage (V)	30
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	52CPQ	Units	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)	25	A	50% duty cycle @ T _C = 132°C, rectangular wave form
	50		
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	2180	A	5μs Sine or 3μs Rect. pulse
	600		10ms Sine or 6ms Rect. pulse
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	27	mJ	T _J = 25°C, I _{AS} = 6 Amps, L = 1.5 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	6	A	Current decaying linearly to zero in 1 μsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	52CPQ	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.48	V	@ 25A
	0.55	V	@ 50A
	0.38	V	@ 25A
	0.49	V	@ 50A
I _{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.9	mA	T _J = 25°C
	450	mA	T _J = 125°C
V _{F(TO)} Threshold Voltage	0.24	V	T _J = T _J max.
r _t Forward Slope Resistance	5.05	mΩ	
C _T Max. Junction Capacitance (Per Leg)	4600	pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25°C
L _S Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V _R)	10000	V/μs	

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	52CPQ	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 150	°C	
T _{stg} Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg) * See Fig. 4	0.8	°C/W	DC operation
R _{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.4	°C/W	DC operation
R _{thCS} Typical Thermal Resistance, Case to Heatsink	0.25	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	6(0.21)	g(oz.)	
T Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)
	Max.	12(10)	
Case Style	TO-247AC(TO-3P)	JEDEC	

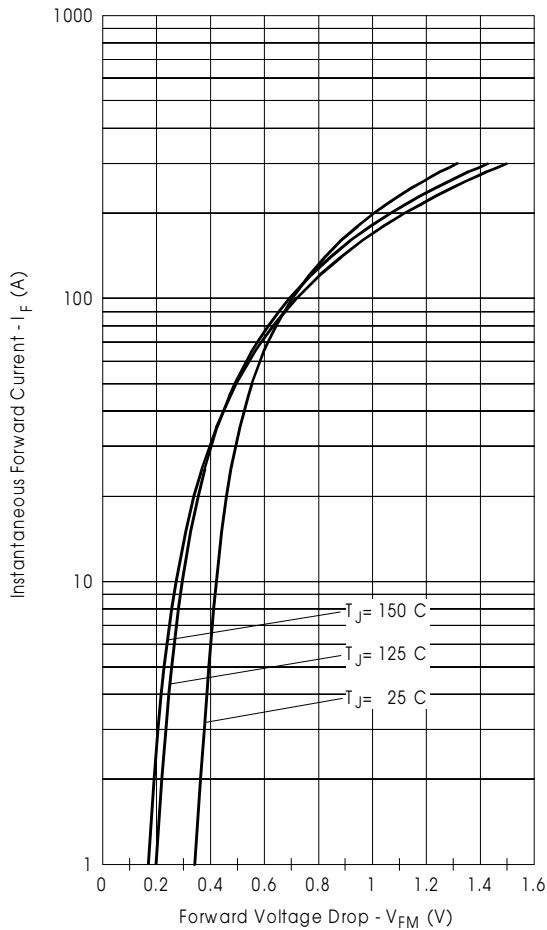


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

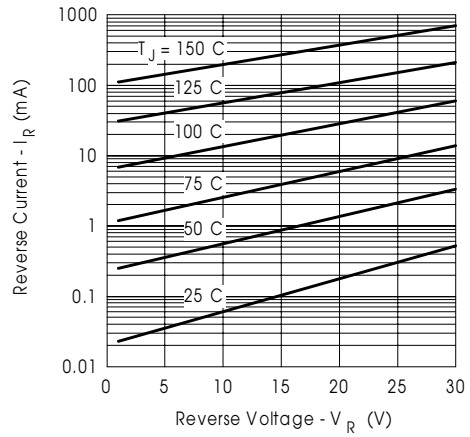


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

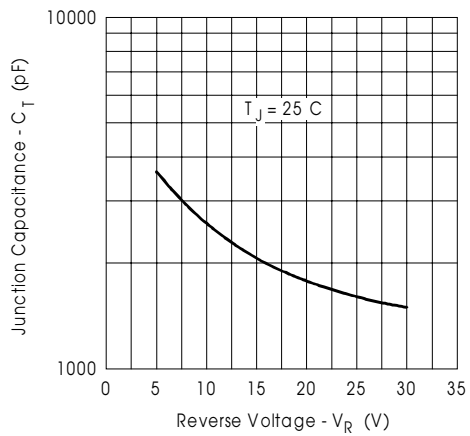


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

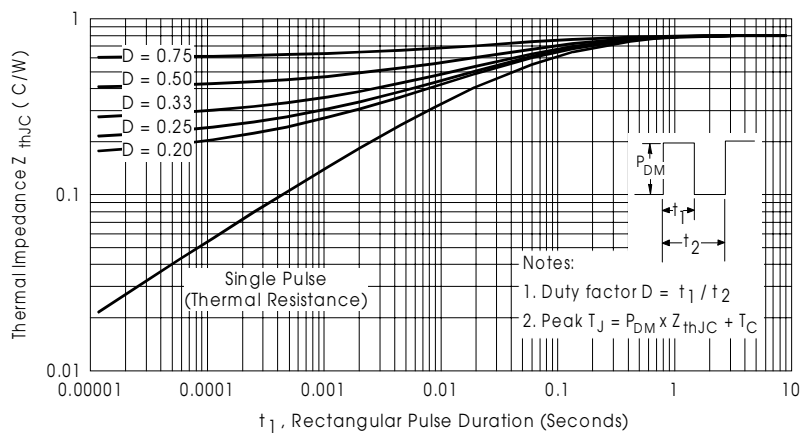


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

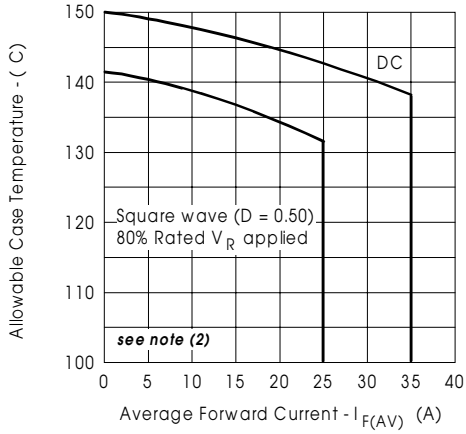


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

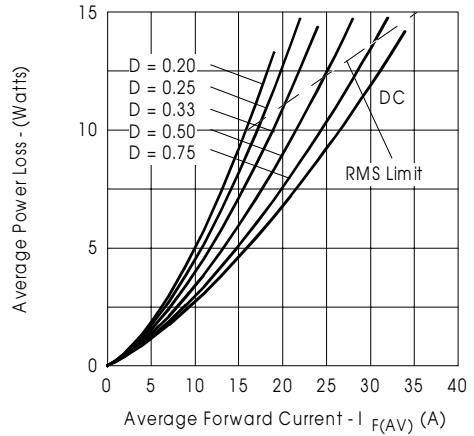


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

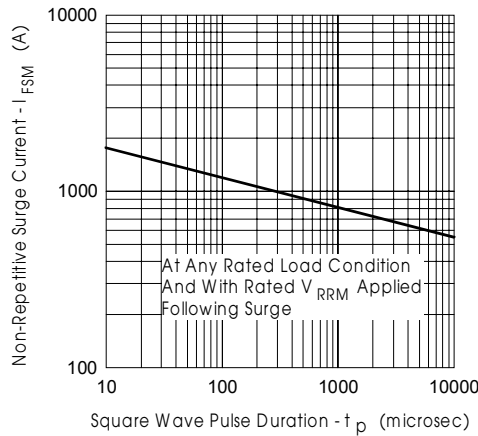


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

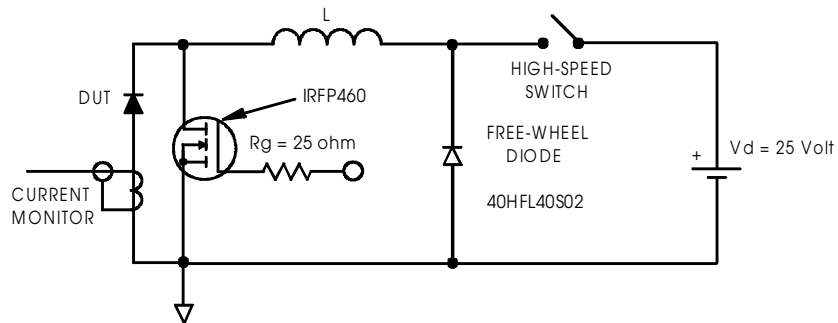


Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Ordering Information Table

Device Code	
52	C
P	Q
030	
①	②
③	④
⑤	

1	-	Essential Part Number
2	-	Common Cathode
3	-	P = TO-247
4	-	Q = Schottky Q Series
5	-	Voltage Rating

030 = 30V

Standard Pack Quantity: 25 pcs

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.