

Z5U (Y5U)
SMD
Features

- Extremely high volumetric efficiency
- Non-linear capacitance change
- Y5U characteristic is also fulfilled


Applications

- Blocking
- Coupling
- Decoupling
- Interference suppression


Termination

- For soldering: Nickel-barrier termination (Ni) for case sizes 0603 to 1210
Silver-palladium termination (AgPd) for case sizes 1812 and 2220

Delivery mode

- Cardboard and blister tape (blister tape for chip thickness $\geq 1,2 \pm 0,1$ mm and case sizes ≥ 1210), 180-mm and 330-mm reel available
- Bulk case for case sizes 0603 and 0805 (≥ 68 nF)

Electrical data

Temperature characteristic		Z5U (Y5U) ¹⁾	
Climatic category (IEC 60068-1)		30/85/56	
Standard		EIA	
Dielectric		Class 2	
Rated voltage ²⁾	V_R	25, 50	VDC
Test voltage	V_{test}	$2,5 \cdot V_R/5$ s	VDC
Capacitance range	C_R	10 nF ... 4,7 μ F	
Max. relative capacitance change	$\Delta C/C$	+22/-56	%
Dissipation factor (limit value)	$\tan \delta$	$< 50 \cdot 10^{-3}$	
Insulation resistance ³⁾ at +25 °C	R_{ins}	$> 10^4$	M Ω
Time constant ³⁾ at +25 °C	τ	> 500	s
Operating temperature range	T_{op}	-30 ... +85	°C
Ageing ⁴⁾		yes	

1) Y5U specification is also fulfilled.


2) Note: No operation on AC line.

3) For $C_R > 10$ nF the time constant $\tau = C \cdot R_{ins}$ is given.

4) Refer to chapter "General Technical Information", page 197.


Capacitance tolerances

Code letter	M (standard)
Tolerance	$\pm 20\%$

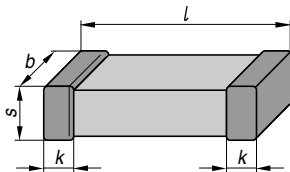Dimensional drawing


KKE0329-N


Dimensions (mm)

Case size (inch) (mm)	0603 1608	0805 2012	1206 3216	1210 3225
<i>l</i>	$1,6 \pm 0,15$	$2,0 \pm 0,20$	$3,2 \pm 0,20$	$3,2 \pm 0,30$
<i>b</i>	$0,8 \pm 0,10$	$1,25 \pm 0,15$	$1,6 \pm 0,15$	$2,5 \pm 0,30$
<i>s</i>	$0,8 \pm 0,10$	1,30 max.	1,30 max.	1,30 max.
<i>k</i>	0,1 – 0,4	0,13 – 0,75	0,25 – 0,75	0,25 – 0,75

Case size (inch) (mm)	1812 4532	2220 5750
<i>l</i>	$4,5 \pm 0,30$	$5,7 \pm 0,40$
<i>b</i>	$3,2 \pm 0,30$	$5,0 \pm 0,40$
<i>s</i>	1,30 max.	1,30 max.
<i>k</i>	0,25 – 1,0	0,25 – 1,0

Tolerances to CECC 32101-801

Recommended solder pad




KKE0308-1

Maximum dimensions (mm)

Case size (inch/mm)	Type	A	C	D
0603/1608	single chip	1,0	3,0	1,0
0805/2012	single chip	1,2	3,4	1,3
1206/3216	single chip	1,2	4,5	1,8
1210/3225	single chip	1,2	4,5	2,8
1812/4532	single chip	1,5	6,0	3,6
2220/5750	single chip	1,5	7,2	5,5

Termination

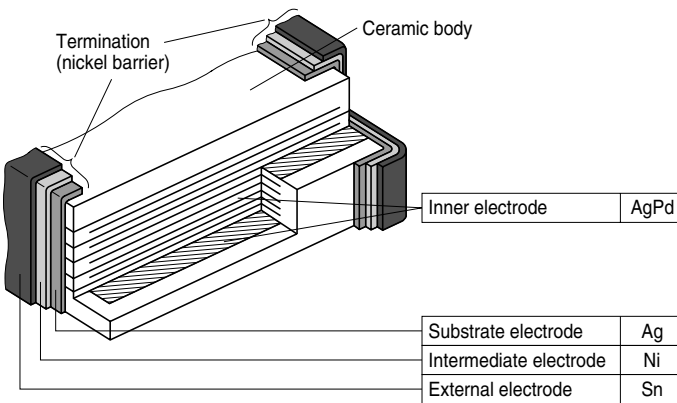


KKE0484-W

Product range chip capacitors

		Z5U (Y5U)											
Size ¹⁾ inch mm		0603 1608		0805 2012		1206 3216		1210 3225		1812 4532		2220 5750	
		Type	B37932		B37942		B37873		B37951		B37954		B37957
V_R (VDC)		25	50	25	50	25	50		50		50		50
C_R													
10	nF												
15	nF												
22	nF												
33	nF												
47	nF												
68	nF												
100	nF												
150	nF												
220	nF												
330	nF												
470	nF												
680	nF												
1,0	μ F												
1,5	μ F												
2,2	μ F												
3,3	μ F												
4,7	μ F												

1) $l \times b$ (inch) / $l \times b$ (mm)

Multilayer Ceramic Capacitors
Z5U (Y5U); 0603 to 1206

Ordering codes and packing for Z5U (Y5U), 25 VDC, nickel-barrier terminations

C_R	Ordering code	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel	Bulk case
			** \triangle 60	** \triangle 70	** \triangle 01
			pcs/reel	pcs/reel	pcs

Case size 0603, 25 VDC

100 nF	B37932K0104M0**	0,8 ± 0,1	4000	16000	15000
--------	-----------------	-----------	------	-------	-------

Case size 0805, 25 VDC


150 nF	B37942K0154M0**	0,8 ± 0,1	4000	16000	–
220 nF	B37942K0224M0**	0,8 ± 0,1	4000	16000	–

Case size 1206, 25 VDC

1,0 μ F	B37873K0105M0**	1,2 ± 0,1	3000 ¹⁾	12000 ²⁾	–
-------------	-----------------	-----------	--------------------	---------------------	---

1) Blister tape, 180-mm reel, ordering code ** \triangle 62

2) Blister tape, 330-mm reel, ordering code ** \triangle 72



Multilayer Ceramic Capacitors
Z5U (Y5U); 0603 to 1210

Ordering codes and packing for Z5U (Y5U), 50 VDC, nickel-barrier terminations

C_R	Ordering code	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel	Bulk case
			** \triangleq 60	** \triangleq 70	** \triangleq 01
			pcs/reel	pcs/reel	pcs

Case size 0603, 50 VDC

10 nF	B37932K5103M0**	0,8 ± 0,1	4000	16000	15000
22 nF	B37932K5223M0**	0,8 ± 0,1	4000	16000	15000
47 nF	B37932K5473M0**	0,8 ± 0,1	4000	16000	15000

Case size 0805, 50 VDC

10 nF	B37942K5103M0**	0,6 ± 0,1	5000	20000	10000
22 nF	B37942K5223M0**	0,6 ± 0,1	5000	20000	10000
47 nF	B37942K5473M0**	0,6 ± 0,1	5000	20000	10000
100 nF	B37942K5104M0**	0,8 ± 0,1	4000	16000	–

Case size 1206, 50 VDC


100 nF	B37873K5104M0**	0,8 ± 0,1	4000	16000	–
220 nF	B37873K5224M0**	0,8 ± 0,1	4000	16000	–
470 nF	B37873K5474M0**	1,2 ± 0,1	3000 ¹⁾	12000 ²⁾	–

Case size 1210, 50 VDC

470 nF	B37951K5474M0**	0,8 ± 0,1	4000 ¹⁾	16000 ²⁾	–
1,0 µF	B37951K5105M0**	1,2 ± 0,1	3000 ¹⁾	12000 ²⁾	–

1) Blister tape, 180-mm reel, ordering code ** \triangleq 62

2) Blister tape, 330-mm reel, ordering code ** \triangleq 72

Multilayer Ceramic Capacitors
Z5U (Y5U); 1812 and 2220

Ordering codes and packing for Z5U (Y5U), 50 VDC, silver-palladium terminations

C_R	Ordering code	Chip thickness	Blister tape, Ø 180-mm reel	Blister tape, Ø 330-mm reel
		mm	** \triangle 62	** \triangle 72
			pcs/reel	pcs/reel

Case size 1812, 50 VDC


680 nF	B37954J5684M0**	1,2 ± 0,1	1500	5000
1,0 µF	B37954J5105M0**	1,2 ± 0,1	1500	5000
1,5 µF	B37954J5155M0**	1,2 ± 0,1	1500	5000

Case size 2220, 50 VDC


1,0 µF	B37957J5105M0**	1,2 ± 0,1	1500	5000
2,2 µF	B37957J5225M0**	1,2 ± 0,1	1500	5000
4,7 µF	B37957J5475M0**	1,2 ± 0,1	1500	5000

Typical characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T

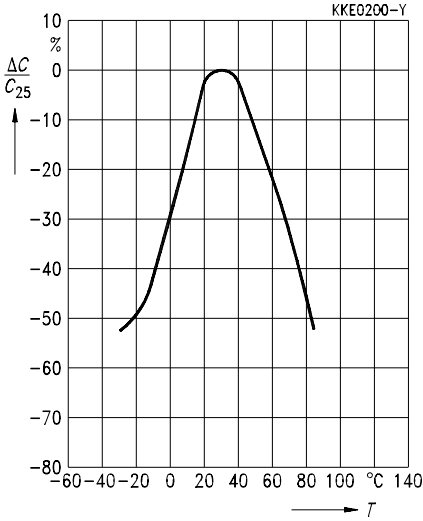


Capacitance change $\Delta C/C_0$ versus superimposed DC voltage V

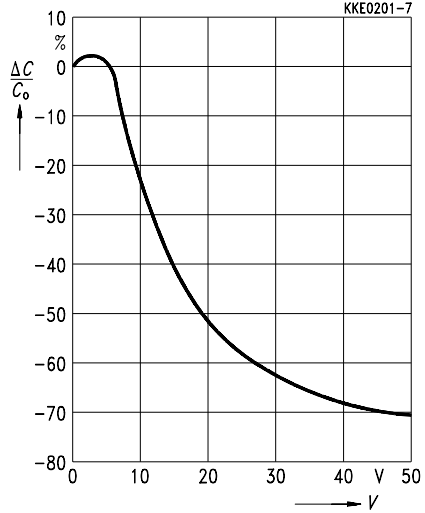

Impedance $|Z|$ versus frequency f

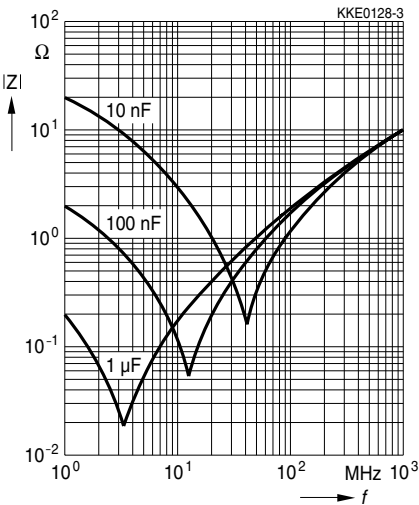


Dissipation factor $\tan \delta$ versus temperature T

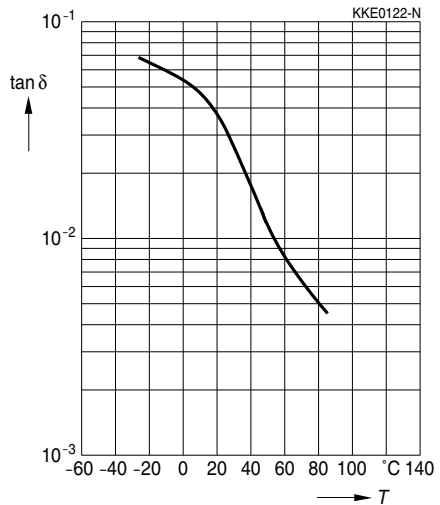


Typical characteristics

Insulation resistance R_{ins} versus temperature T

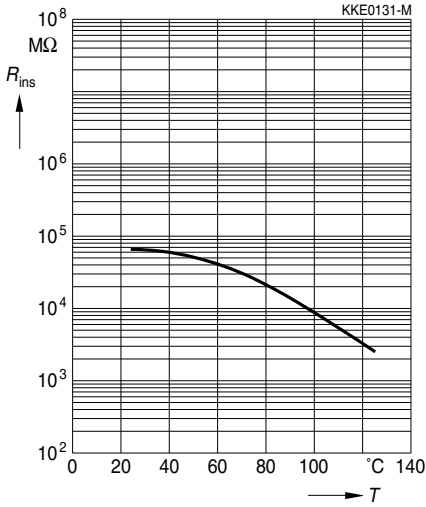

Capacitance change $\Delta C/C_1$ versus time t

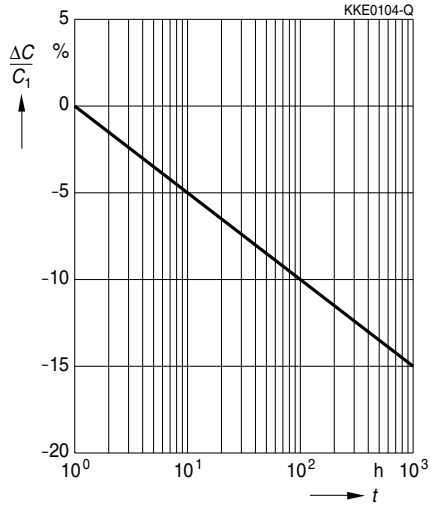

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.