


# PRODUCT SPECIFICATION



DATE : 03/01/2005

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW217H</b>	Preliminary	REV. 0
		SHEET 1 OF 7	

## ● OUTSIDE DIMENSION :

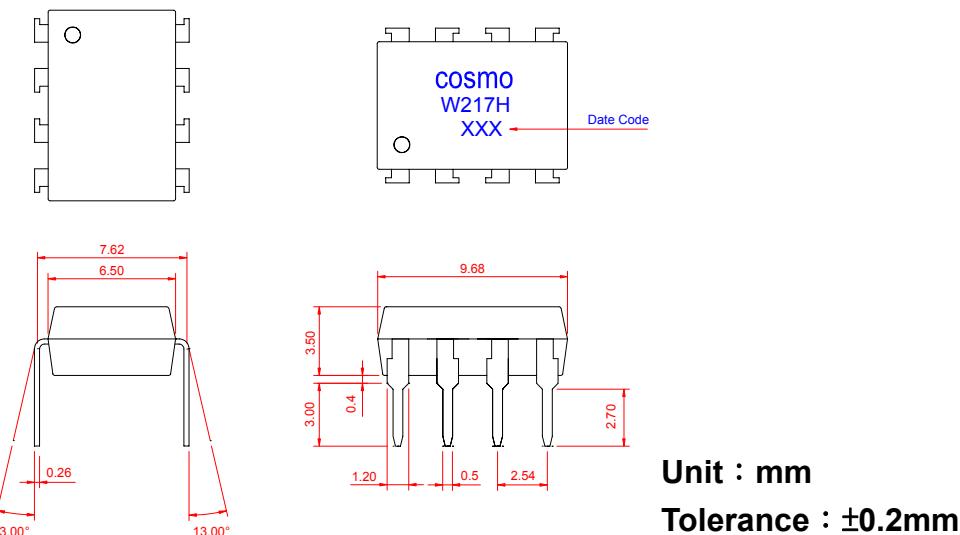

## ● Turn On / Turn Off time

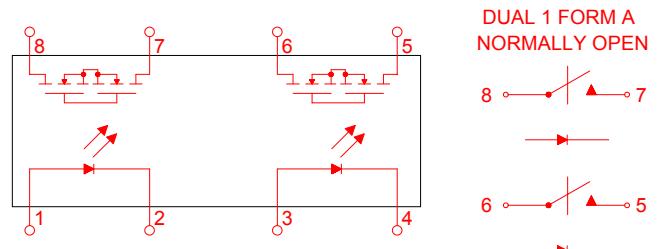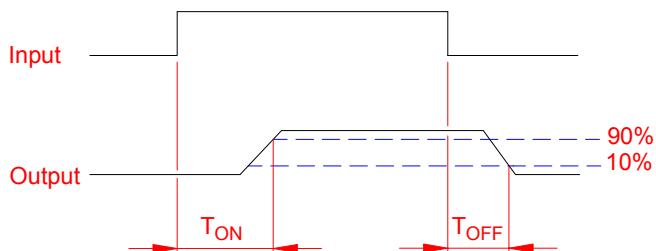

## ● Absolute Maximum Ratings

( Ta=25°C )

Emitter (Input)	Detector (Output)
Reverse Voltage ..... 5.0V	Output Breakdown Voltage ..... ± 200V
Continuous Forward Current ..... 50mA	Continuous Load Current ..... ± 180mA
Peak Forward Current ..... 1A	Power Dissipation ..... 500mW
Power Dissipation ..... 100mW	
Derate Linearly from 25°C ..... 1.3mW/°C	

## General Characteristics

Isolation Test Voltage ..... 5000VACrms	Storage Temperature Range ..... -40°C to +125°C
Isolation Resistance ..... Vio=500V, Ta=25°C ..... $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
Total Power Dissipation ..... 550mW	Junction Temperature ..... 100°C
Derate Linearly from 25°C ..... 2.5mW/°C	Soldering Temperature , 2mm from case , 10 sec ..... 260°C

# PRODUCT SPECIFICATION

DATE : 03/01/2005



<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW217H</b>	Preliminary	REV. 0
		SHEET 2 OF 7	

## ● Electro-optical Characteristics

( Ta=25°C )

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter ( Input )						
Forward Voltage	$V_F$	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	$I_{FON}$	$V_L=\pm 20\text{V}$ , $I_L=100\text{mA}$ , $t=10\text{ms}$			5.0	mA
Recovery Input Current	$I_{FOFF}$	$V_L=\pm 20\text{V}$ , $I_L \leq 5\mu\text{A}$	0.2			mA
Detector ( Output )						
Output Breakdown Voltage	$V_B$	$I_B=50\mu\text{A}$	200			V
Output Off-State Leakage	$I_{TOFF}$	$V_T=100\text{V}$ , $I_F=0\text{mA}$		0.2	1	$\mu\text{A}$
I/O Capacitance	$C_{ISO}$	$I_F=0$ , $f=1\text{MHz}$		6		pF
ON Resistance	$R_{ON}$	$I_L=100\text{mA}$ , $I_F=10\text{mA}$		6	15	$\Omega$
Turn-On Time	$T_{ON}$	$I_F=10\text{mA}$ , $V_L=\pm 20\text{V}$ $t=10\text{ms}$ , $I_L=\pm 100\text{mA}$		0.4	1.0	ms
Turn-Off Time	$T_{OFF}$			0.3	1.0	ms

## ● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	2a	AC/DC	-	<p>( 1 ) Two Independent 1 Form A use</p>  <p>( 2 ) 2 Form A use</p> 

# PRODUCT SPECIFICATION

DATE : 03/01/2005

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW217H</b>	Preliminary	REV. 0
		SHEET 3 OF 7	

## ● Data Curve

Load current vs. ambient temperature



Allowable ambient Temperature :

-40°C to +85°C

On resistance vs. ambient temperature across terminals 5,7 and 6,8 pin

LED current : 5mA

Continuous load current : 180mA (DC)

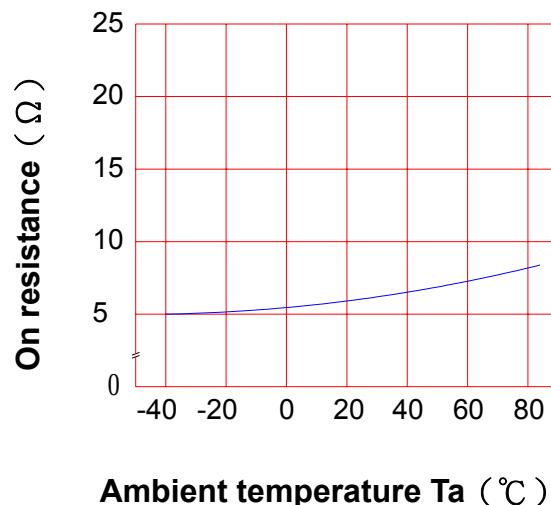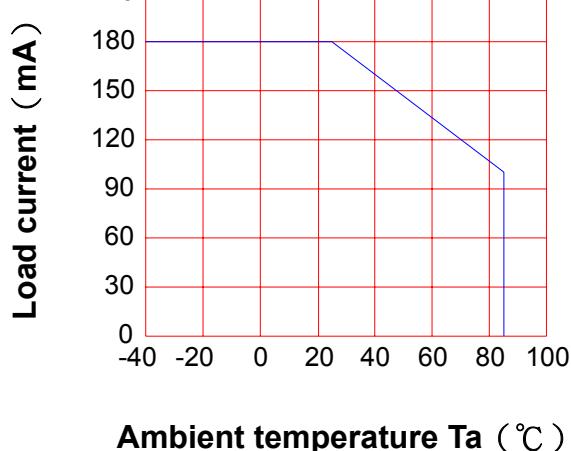

Turn On Time vs. ambient temperature

Load voltage 200V (DC)

LED current : 5mA



Continuous load current : 180mA (DC)

Turn Off Time vs. ambient temperature

Load voltage 200V (DC)

LED current : 5mA

Continuous load current : 180mA (DC)

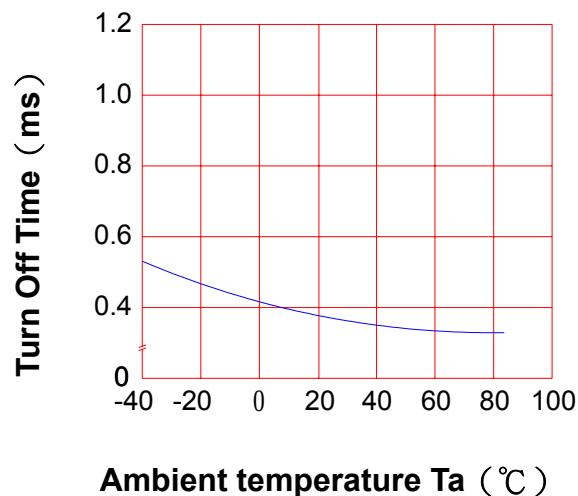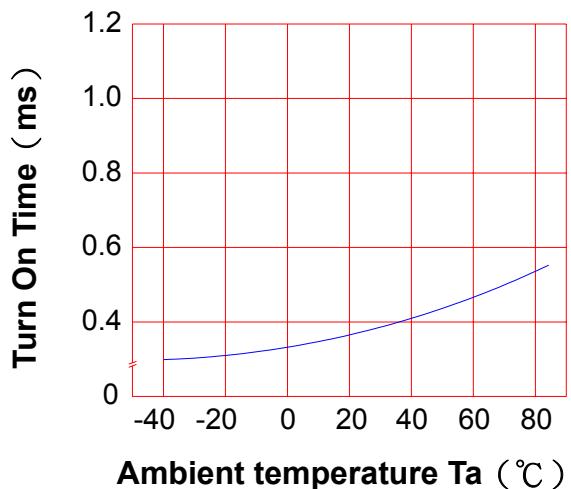

# PRODUCT SPECIFICATION

DATE : 03/01/2005


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW217H</b>	Preliminary	REV. 0
		SHEET 4 OF 7	

LED operate current vs.

ambient temperature

Load Voltage : 200V (DC)

Continuous load current : 180mA (DC)

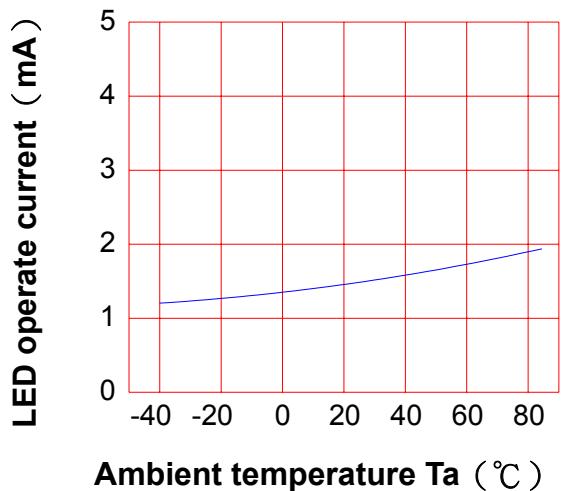


LED Turn Off current vs.

ambient temperature

Load Voltage : 200V (DC)


Continuous load current : 180mA (DC)

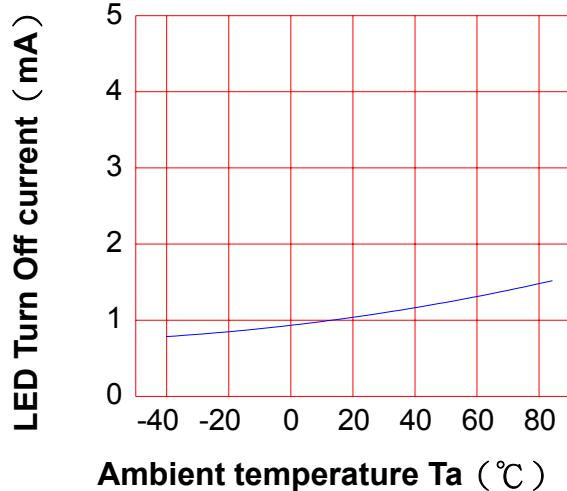

LED dropout voltage vs.

ambient temperature


LED current : 5 to 50mA

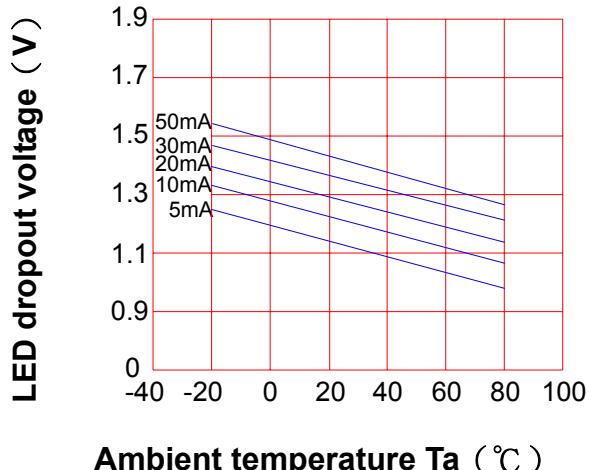

Voltage vs. current characteristics of output at MOSFET portion

Measured portion : across terminals 5,7 and 6,8 pin

Ambient temperature : 25°C

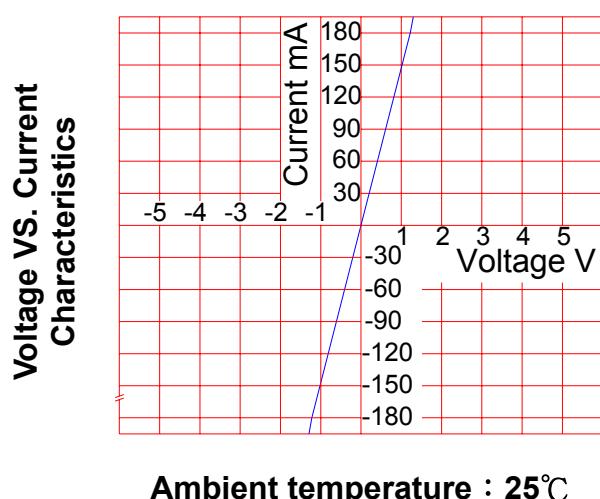

Ambient temperature : 25°C

# PRODUCT SPECIFICATION



**LED forward current vs. Turn On Time**

Across terminals 5,7 and 6,8 pin

Load voltage : 200V (DC)

Continuous load current : 180mA (DC)

Ambient temperature : 25°C

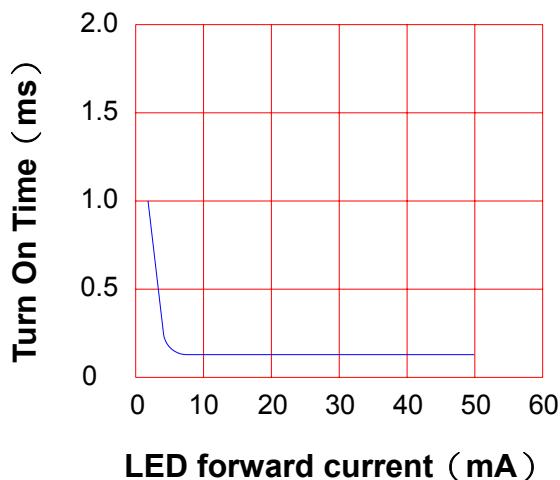
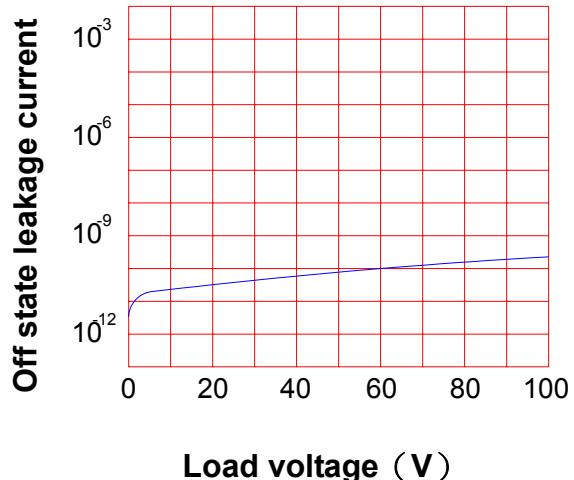

**Off state leakage current**  
Across terminals 5,7 and 6,8 pin  
Ambient temperature : 25°C
**LED forward current vs. reverse(ON) time**

Across terminals 5,7 and 6,8 pin

Load voltage : 200V (DC)

Continuous load current : 180mA (DC)

Ambient temperature : 25°C

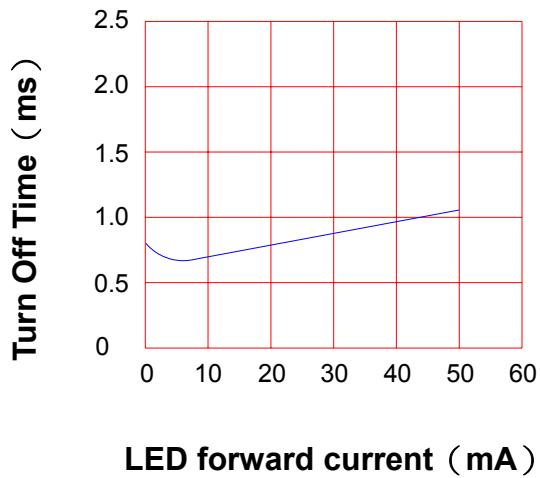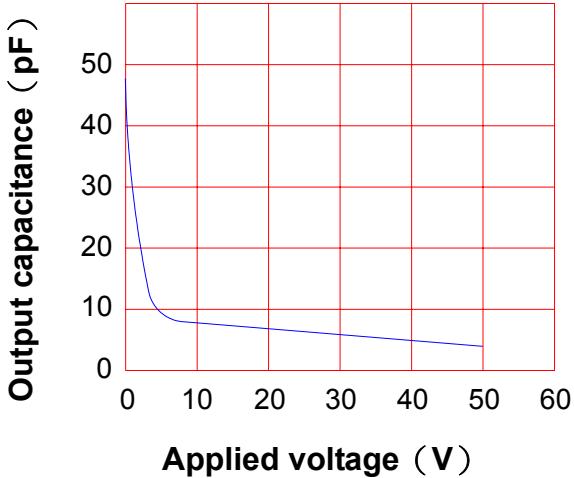

**Applied voltage vs. output capacitance**  
Across terminals 5,7 and 6,8 pin  
Frequency : 1MHz  
Ambient temperature : 25°C


## ● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

(IF=5mA)

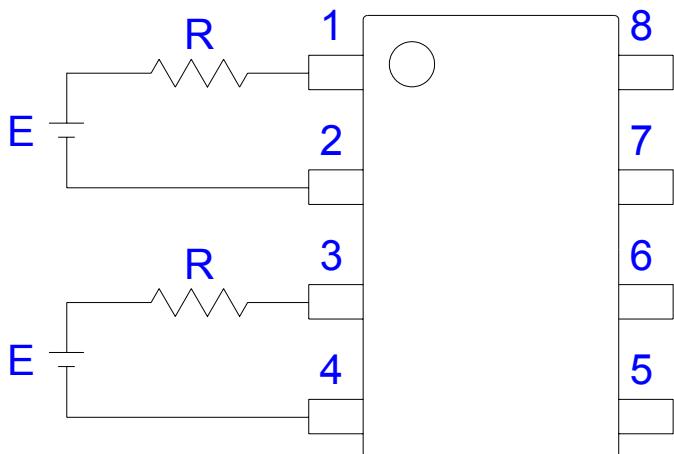

E	R
3.3V	Approx. 330 $\Omega$
5V	Approx. 640 $\Omega$
12V	Approx. 1.9K $\Omega$
15V	Approx. 2.5K $\Omega$
24V	Approx. 4.1K $\Omega$



- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

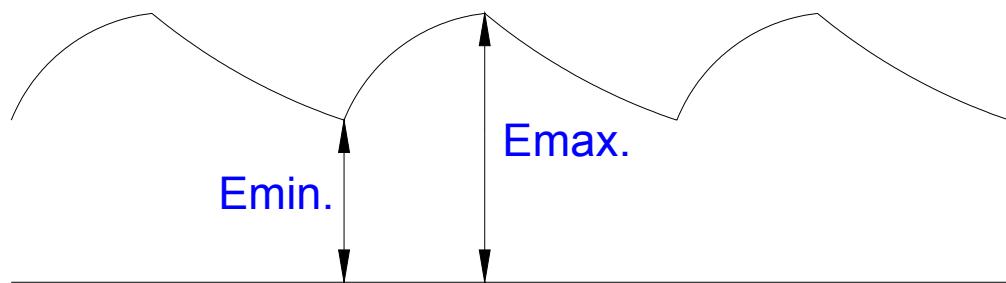

## PRODUCT SPECIFICATION

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

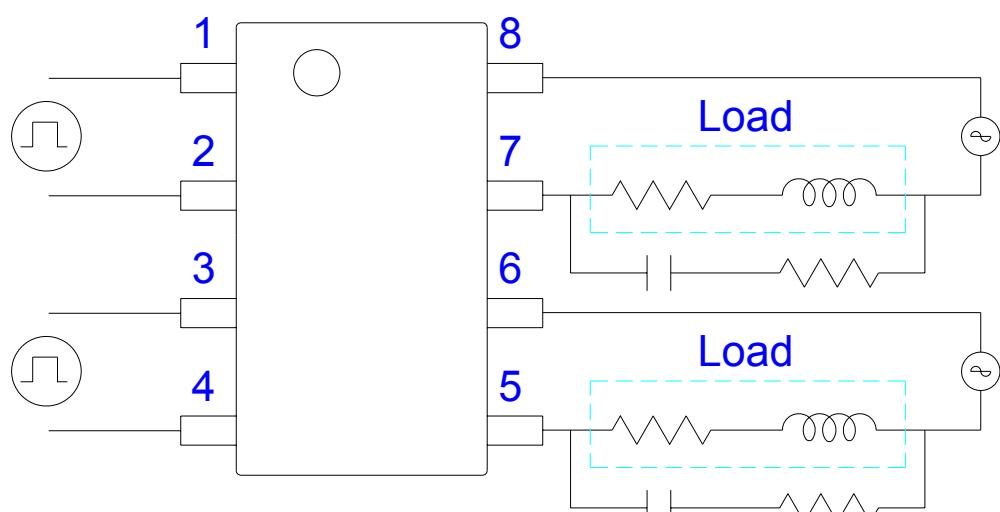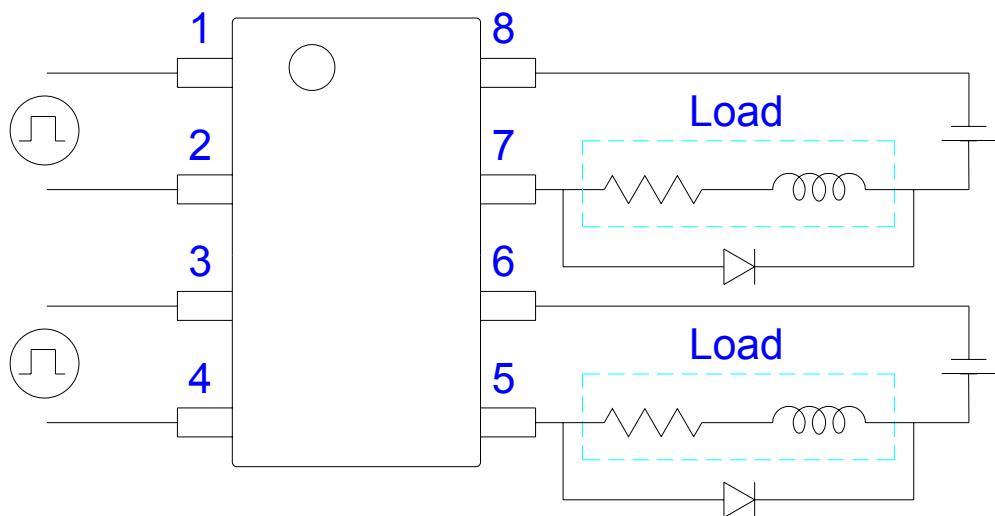

R-C Snubber