

L1330A LOW VOLTAGE HEAVY DUTY FUSE

These robust, self contained (needing no holder) fuses afford short circuit protection for the supply and overload protection for welding equipment, heavy current rectifier units, the motors of battery driven vehicles, hoists and winches.

Housed in a strong ceramic case, with a shatter-proof windows for visual inspection of the fuse equipment; this is integral with the solid terminal lugs by which the fuse may be mounted directly in the supply line. These terminal lugs are slotted for quick insertion.

NOMINAL CURRENT RATING: 35A, 50A, 80A, 100A, 130A, 150A, 200A, 225A, 275A, 325A, 500A,

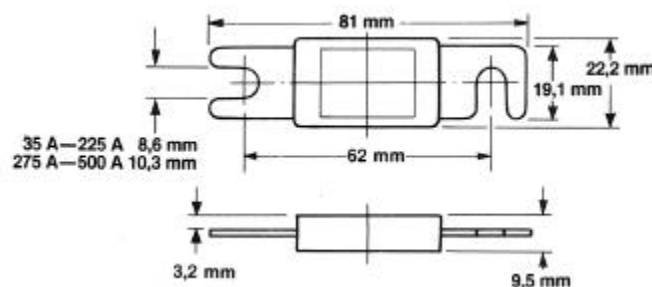
MAXIMUM PROSPECTIVE OVERLOAD: 3000A
time constant DC 0.005 / 0.006

LIFE: The fuses have a minimum life of 1,000 hours continuous at rated current at a temperature of 25°C or at 80% of their nominal rated current at 70°C, and blow within 10 seconds at three times their rated current (35A at 3.5 x In)

TEMPERATURE RANGE: -65°C to +70°C (ambient)

WEIGHT: 18.7g to 29.8g according to rating (average)

MARKING: Current rating printed on window and stamped on lug

ORDERING REFERENCE: L1330/CURRENT RATING IN AMPERES

BLP reserve the right to change without prior notice the information contained within this leaflet

BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>