

RF Power Field-Effect Transistor

N-Channel Enhancement-Mode Lateral MOSFET

Designed for W-CDMA base station applications with frequencies from 2110 to 2170 MHz. Suitable for TDMA, CDMA and multicarrier amplifier applications. Dual path topology suitable for Doherty, quadrature, single-ended and push-pull applications.


- Typical 2-Carrier W-CDMA Performance: $V_{DD} = 28$ Volts, $I_{DQ} = 500$ mA, $P_{out} = 10$ Watts Avg., Full Frequency Band, Channel Bandwidth = 3.84 MHz, PAR = 8.5 dB @ 0.01% Probability on CCDF.
Power Gain — 14.5 dB
Drain Efficiency — 25.5%
IM3 @ 10 MHz Offset — -37 dBc in 3.84 MHz Channel Bandwidth
ACPR @ 5 MHz Offset — -39 dBc in 3.84 MHz Channel Bandwidth
- Capable of Handling 5:1 VSWR, @ 28 Vdc, 2140 MHz, 45 Watts CW Output Power

Features


- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Internally Matched for Ease of Use
- Qualified Up to a Maximum of 32 V_{DD} Operation
- Integrated ESD Protection
- 200°C Capable Plastic Package
- RoHS Compliant
- In Tape and Reel. R1 Suffix = 500 Units per 44 mm, 13 inch Reel.

MRF5P21045NR1

**2110-2170 MHz, 10 W AVG., 28 V
2 x W-CDMA, DUAL PATH
LATERAL N-CHANNEL
RF POWER MOSFET**



**CASE 1486-03, STYLE 1
TO-270 WB-4**

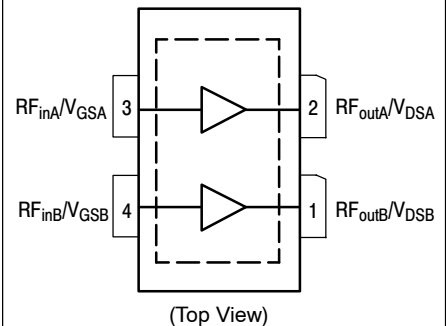

Note: Exposed backside of the package is the source terminal for the transistors.

Figure 1. Pin Connections

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	- 0.5, +65	Vdc
Gate-Source Voltage	V_{GS}	- 0.5, +15	Vdc
Storage Temperature Range	T_{stg}	- 65 to +150	°C
Operating Junction Temperature	T_J	200	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value (1,2)	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.35	°C/W
Case Temperature 80°C, 45 W CW		1.48	
Case Temperature 77°C, 10 W CW			

1. MTTF calculator available at <http://www.freescale.com/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.
2. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

Table 3. ESD Protection Characteristics

Test Methodology	Class
Human Body Model (per JESD22-A114)	1C (Minimum)
Machine Model (per EIA/JESD22-A115)	A (Minimum)
Charge Device Model (per JESD22-C101)	IV (Minimum)

Table 4. Moisture Sensitivity Level

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD 22-A113, IPC/JEDEC J-STD-020	3	260	°C

Table 5. Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

Off Characteristics ⁽¹⁾

Zero Gate Voltage Drain Leakage Current ($V_{DS} = 65\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$)	I_{DSS}	—	—	10	μAdc
Zero Gate Voltage Drain Leakage Current ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$)	I_{DSS}	—	—	1	μAdc
Gate-Source Leakage Current ($V_{GS} = 5\text{ Vdc}$, $V_{DS} = 0\text{ Vdc}$)	I_{GSS}	—	—	1	μAdc

On Characteristics ⁽¹⁾

Gate Threshold Voltage ($V_{DS} = 10\text{ Vdc}$, $I_D = 120\text{ }\mu\text{Adc}$)	$V_{GS(th)}$	2	—	3.5	Vdc
Gate Quiescent Voltage ($V_{DS} = 28\text{ Vdc}$, $I_D = 500\text{ mAdc}$)	$V_{GS(Q)}$	—	3.8	—	Vdc
Fixture Gate Quiescent Voltage ⁽²⁾ ($V_{DD} = 28\text{ Vdc}$, $I_D = 500\text{ mAdc}$, Measured in Functional Test)	$V_{GG(Q)}$	6	7.6	10	Vdc
Drain-Source On-Voltage ($V_{GS} = 10\text{ Vdc}$, $I_D = 1.2\text{ Adc}$)	$V_{DS(on)}$	0.2	0.3	0.35	Vdc


Dynamic Characteristics ^(1,3)

Reverse Transfer Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$)	C_{rss}	—	0.9	—	pF
Output Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$)	C_{oss}	—	124	—	pF
Input Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$)	C_{iss}	—	247	—	pF

Functional Tests ⁽¹⁾ (In Freescale Test Fixture, 50 ohm system) $V_{DD} = 28\text{ Vdc}$, $I_{DQ} = 500\text{ mA}$, $P_{out} = 10\text{ W Avg.}$, $f_1 = 2112.5\text{ MHz}$, $f_2 = 2122.5\text{ MHz}$ and $f_1 = 2157.5\text{ MHz}$, $f_2 = 2167.5\text{ MHz}$, 2-Carrier W-CDMA, 3.84 MHz Channel Bandwidth Carriers. ACPR measured in 3.84 MHz Channel Bandwidth @ $\pm 5\text{ MHz}$ Offset. IM3 measured in 3.84 MHz Bandwidth @ $\pm 10\text{ MHz}$ Offset. PAR = 8.5 dB @ 0.01% Probability on CCDF.

Power Gain	G_{ps}	13.5	14.5	16.5	dB
Drain Efficiency	η_D	23.5	25.5	—	%
Intermodulation Distortion	IM3	—	-37	-35	dBc
Adjacent Channel Power Ratio	ACPR	—	-39	-37	dBc
Input Return Loss	IRL	—	-12	-8	dB

1. Measurement made with device in single-ended configuration. (See Figure 4, Possible Circuit Topologies)
2. $V_{GG} = 2 \times V_{GS(Q)}$. Parameter measured on Freescale Test Fixture, due to resistive divider network on the board. Refer to Test Circuit schematic.
3. Part internally matched both on input and output.

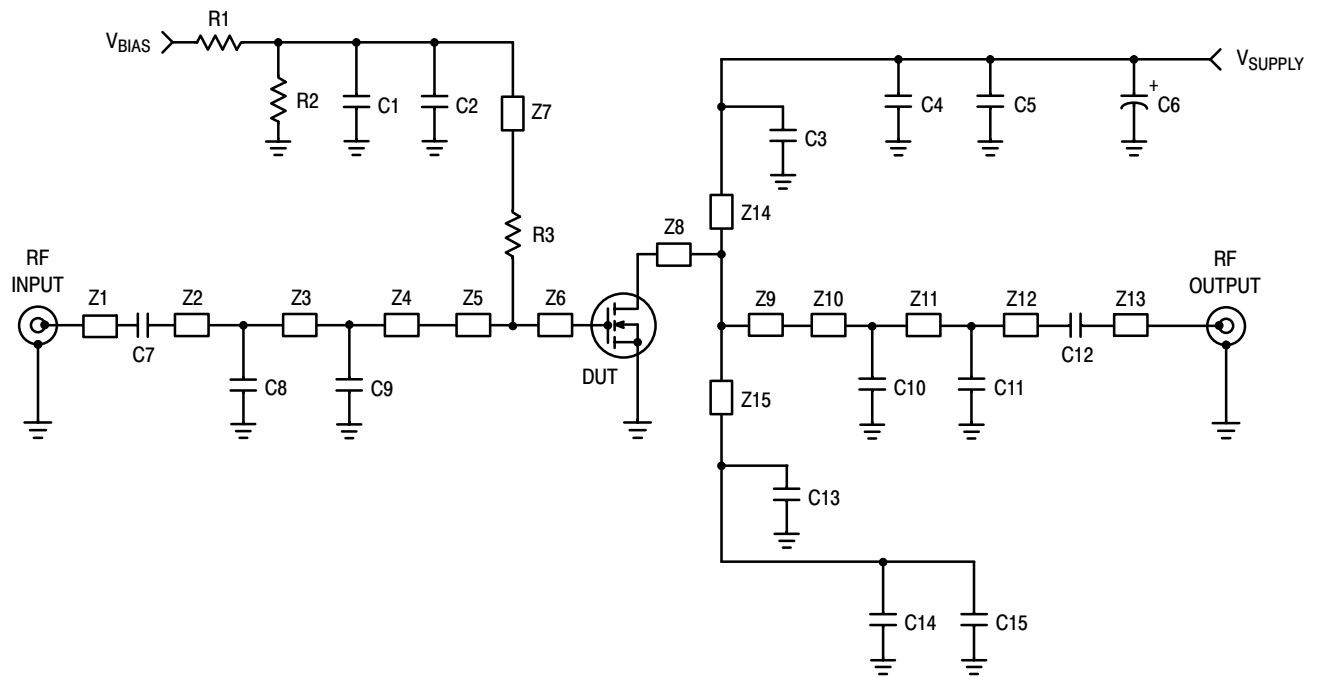

Z1, Z13 0.250" x 0.080" Microstrip
 Z2 1.012" x 0.080" Microstrip
 Z3 0.165" x 0.080" Microstrip
 Z4 0.378" x 0.080" Microstrip
 Z5 0.365" x 1.000" Microstrip
 Z6, Z8 0.115" x 1.000" Microstrip
 Z7 0.510" x 0.080" Microstrip

Z9 0.385" x 1.000" Microstrip
 Z10 0.179" x 0.080" Microstrip
 Z11 0.527" x 0.080" Microstrip
 Z12 0.789" x 0.080" Microstrip
 Z14, Z15 0.270" x 0.080" Microstrip
 PCB Taconic TLX8-0300, 0.030", $\epsilon_r = 2.55$

Figure 2. MRF5P21045NR1 Test Circuit Schematic — Single-Ended Configuration

Table 6. MRF5P21045NR1 Test Circuit Component Designations and Values — Single-Ended Configuration

Part	Description	Part Number	Manufacturer
C1	220 nF Chip Capacitor	18125C224KAT4A	AVX
C2, C3, C7, C12, C13	6.8 pF Chip Capacitors	ATC100B6R8BT500XT	ATC
C4, C5, C14, C15	6.8 μ F Chip Capacitors	C4532X5R1H685MT	TDK
C6	220 μ F, 63 V Electrolytic Capacitor, Radial	EMVY630ATR221MKE0S	Nippon Chemi-Con
C8, C10	1 pF Chip Capacitors	ATC100B1R0BT500XT	ATC
C9	1.5 pF Chip Capacitor	ATC100B1R5BT500XT	ATC
C11	0.5 pF Chip Capacitor	ATC100B0R5BT500XT	ATC
R1, R2	10 k Ω , 1/4 W Chip Resistors	CRCW12061001FKTA	Vishay
R3	10 Ω , 1/4 W Chip Resistor	CRCW120610R0FKTA	Vishay

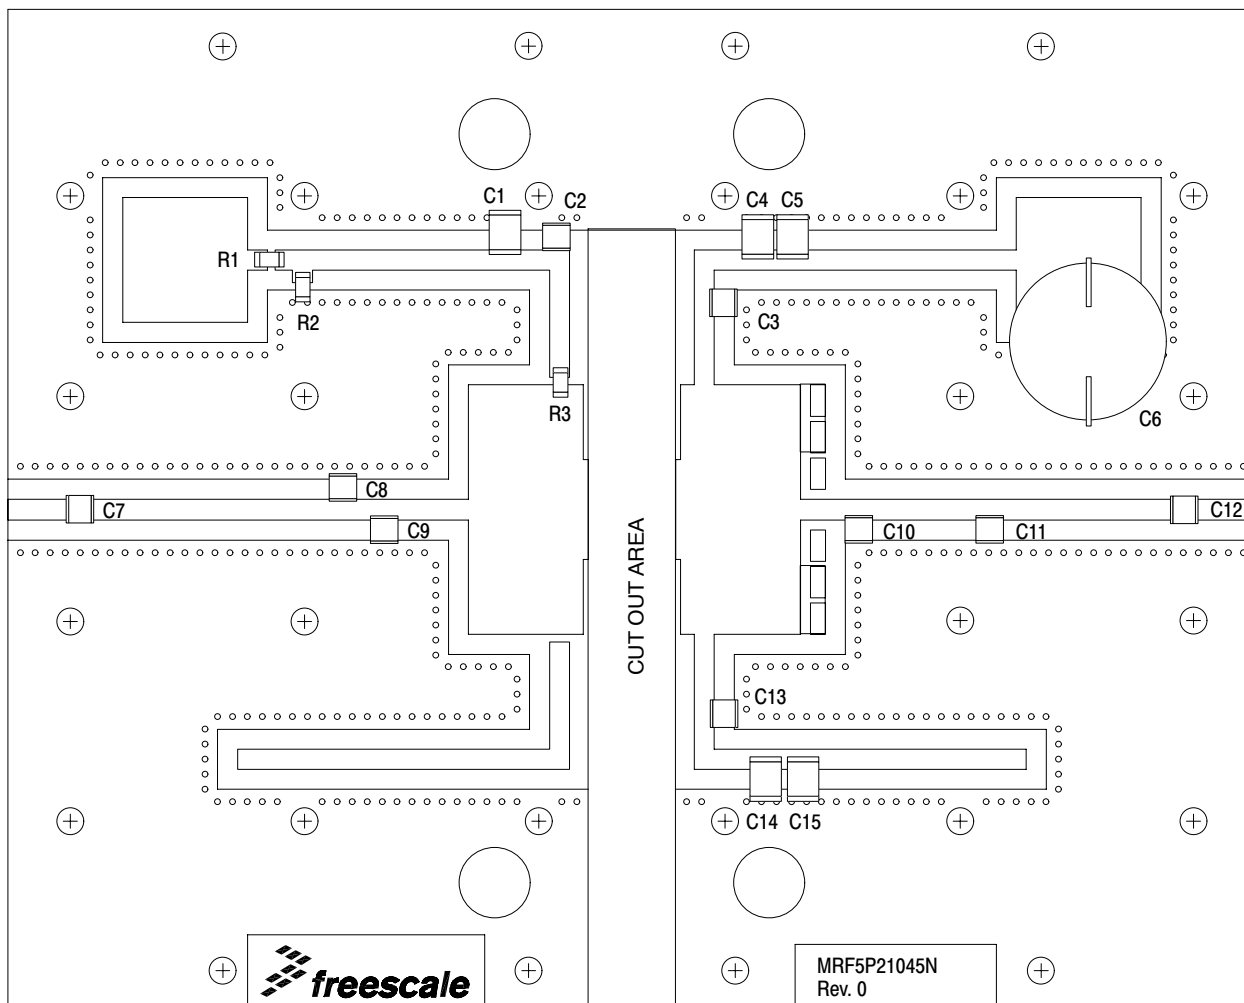


Figure 3. MRF5P21045NR1 Test Circuit Component Layout — Single-Ended Configuration



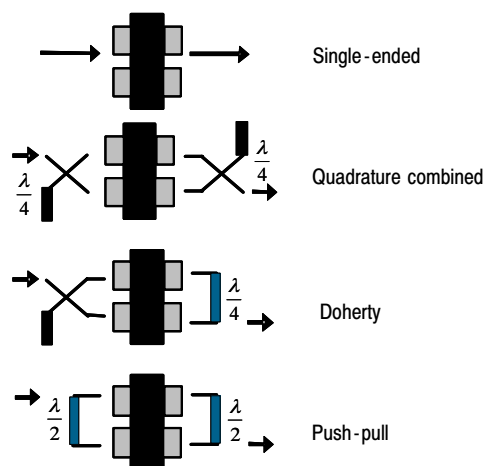


Figure 4. Possible Circuit Topologies


TYPICAL CHARACTERISTICS

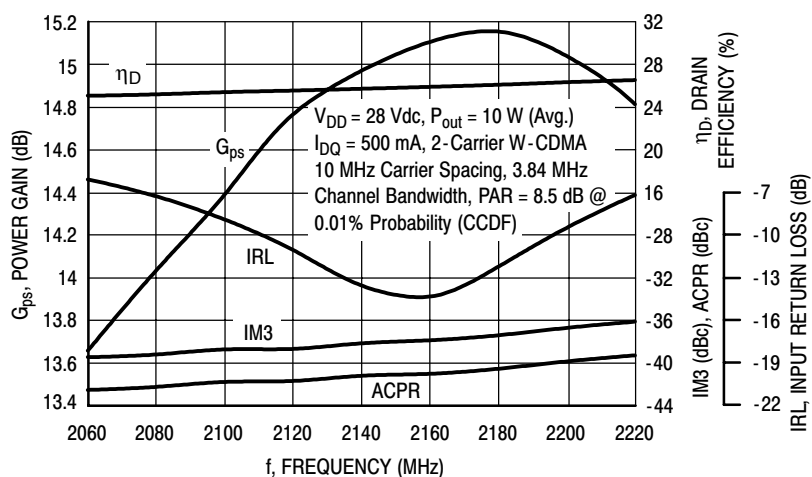


**Figure 5. 2-Carrier W-CDMA Broadband Performance
@ $P_{out} = 10$ Watts Avg.**

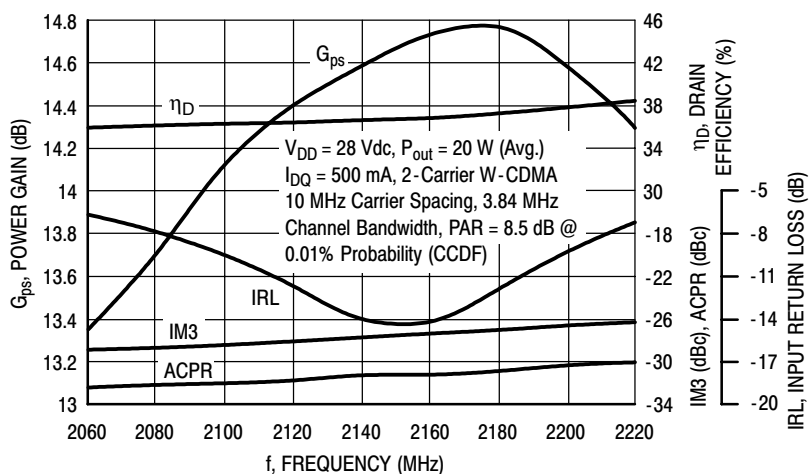

**Figure 6. 2-Carrier W-CDMA Broadband Performance
@ $P_{out} = 20$ Watts Avg.**

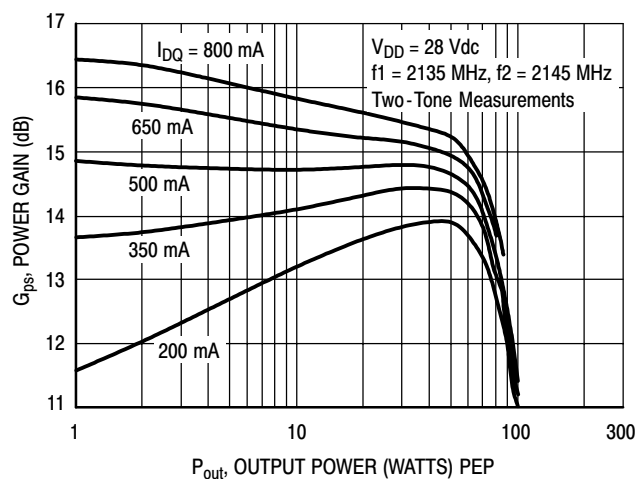

**Figure 7. Two-Tone Power Gain versus
Output Power**

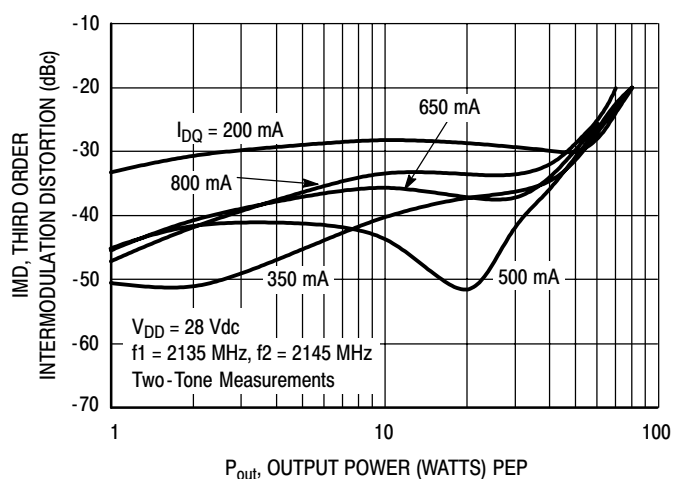

**Figure 8. Third Order Intermodulation Distortion
versus Output Power**

TYPICAL CHARACTERISTICS

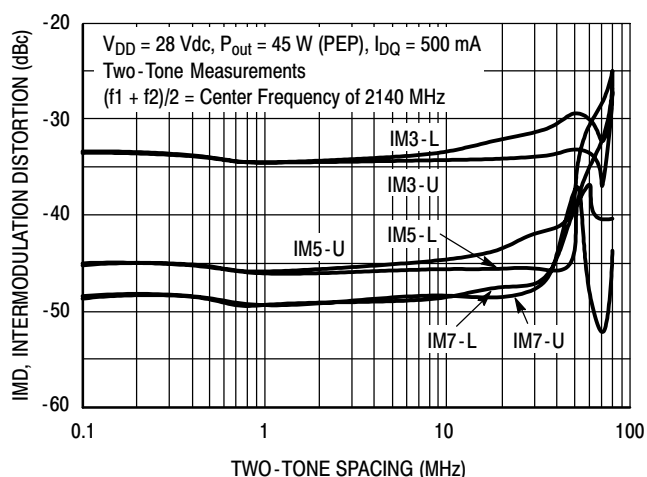


Figure 9. Intermodulation Distortion Products versus Tone Spacing

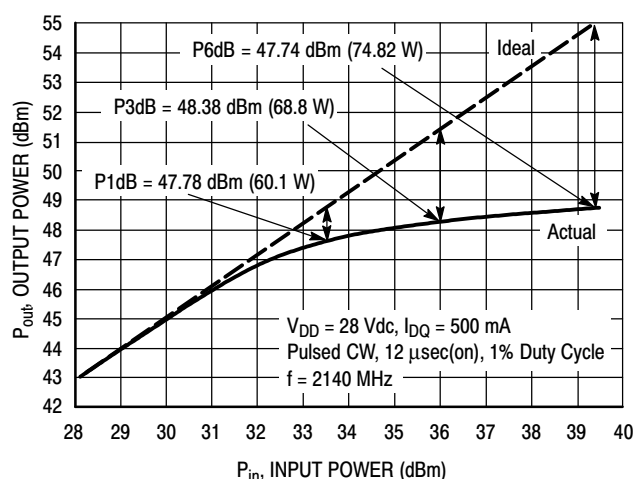


Figure 10. Pulsed CW Output Power versus Input Power

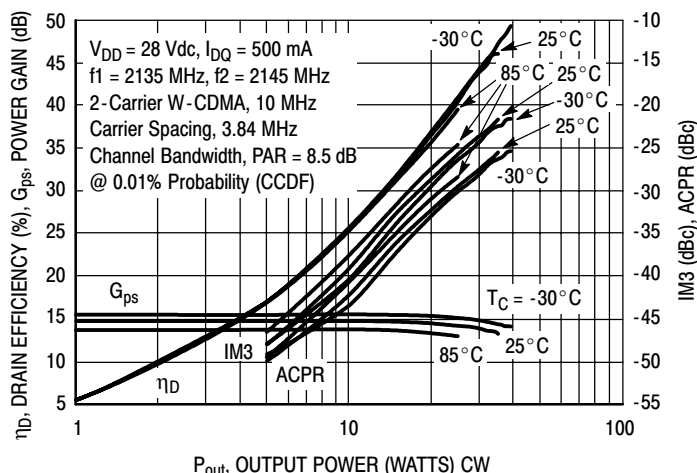


Figure 11. 2-Carrier W-CDMA ACPR, IM3, Power Gain and Drain Efficiency versus Output Power

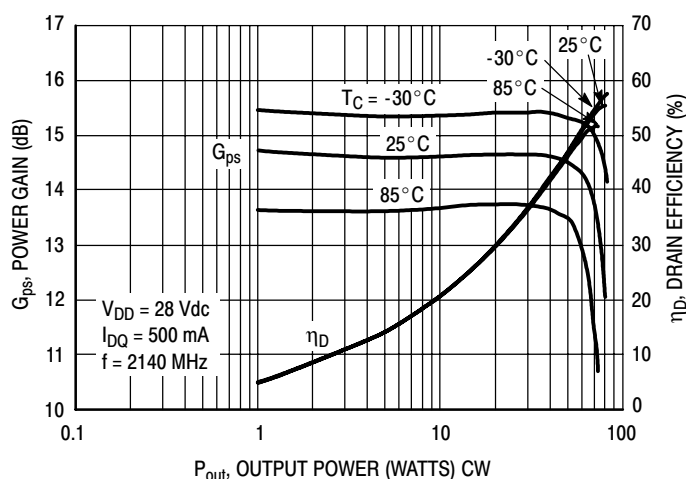


Figure 12. Power Gain and Drain Efficiency versus CW Output Power

TYPICAL CHARACTERISTICS


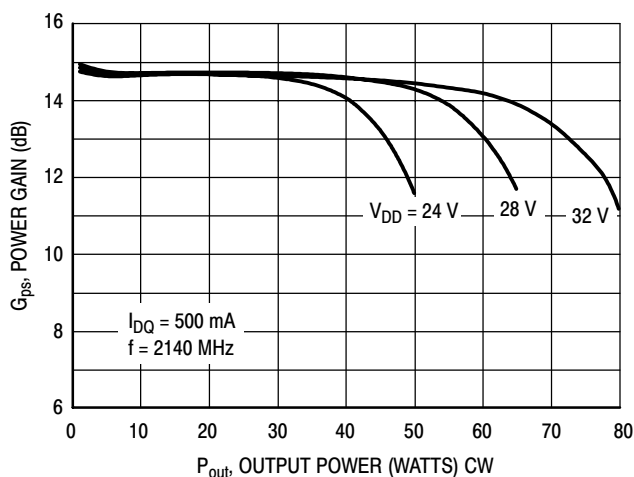


Figure 13. Power Gain versus Output Power

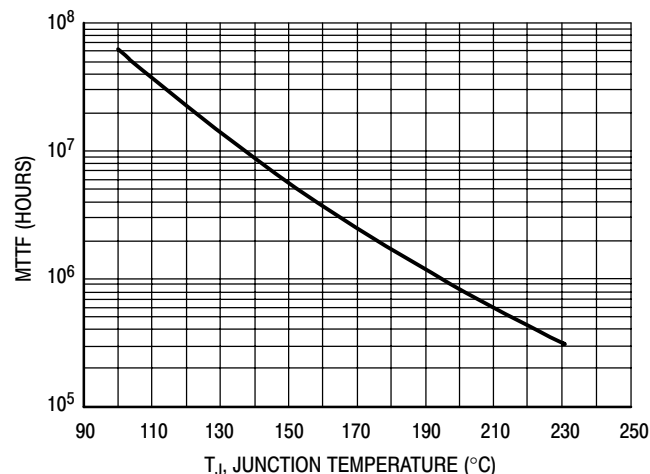

This above graph displays calculated MTTF in hours when the device is operated at $V_{DD} = 28$ Vdc, $P_{out} = 10$ W Avg., and $\eta_D = 25.5\%$.

MTTF calculator available at <http://www.freescale.com/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.

Figure 14. MTTF versus Junction Temperature

W-CDMA TEST SIGNAL

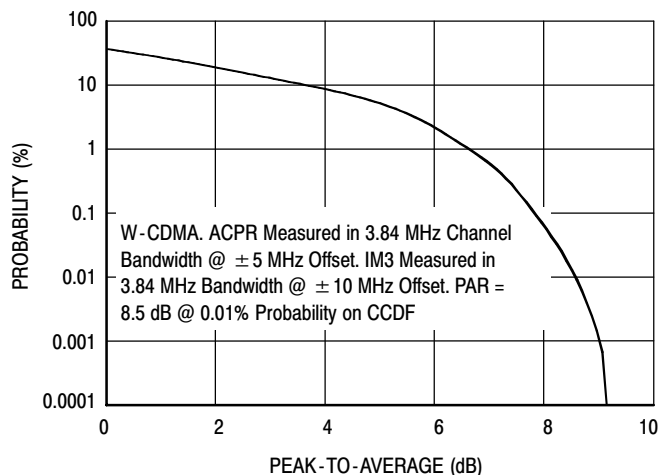


Figure 15. CCDF W-CDMA 3GPP, Test Model 1, 64 DPCH, 67% Clipping, Single-Carrier Test Signal


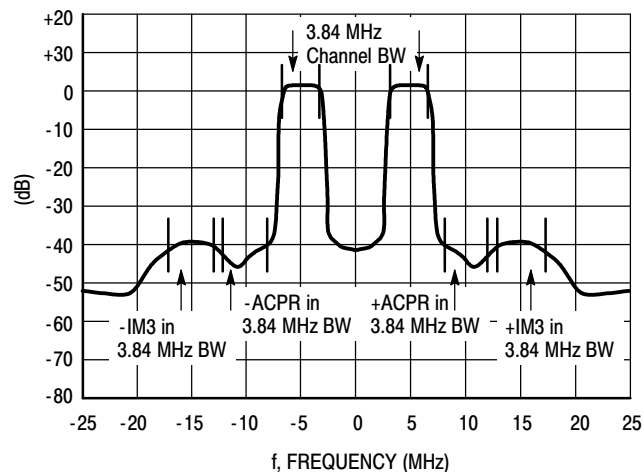


Figure 16. 2-Carrier W-CDMA Spectrum

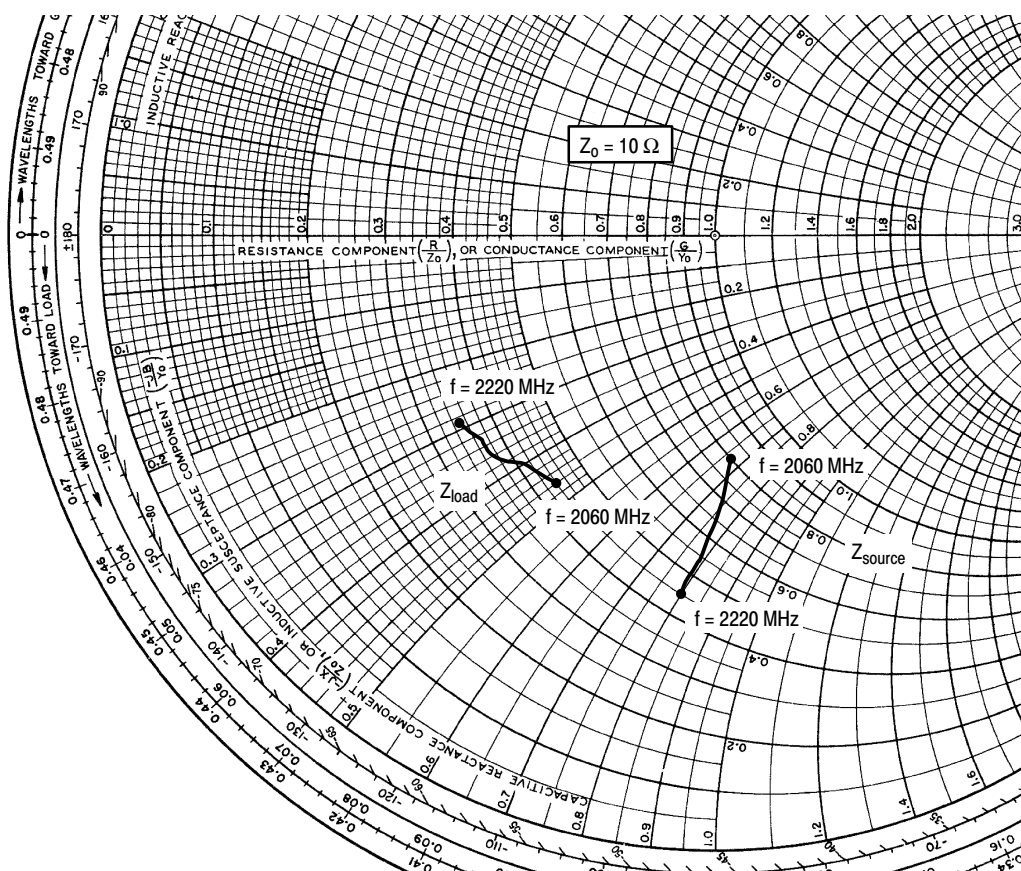

$V_{DD} = 28 \text{ Vdc}$, $I_{DQ} = 500 \text{ mA}$, $P_{out} = 10 \text{ W Avg.}$

f MHz	Z_{source} Ω	Z_{load} Ω
2060	8.01 - j6.68	4.38 - j4.62
2080	7.66 - j6.94	4.27 - j4.43
2100	7.26 - j7.20	4.12 - j4.04
2120	6.76 - j7.45	3.98 - j3.90
2140	6.28 - j7.71	3.81 - j3.69
2160	5.82 - j7.78	3.73 - j3.50
2180	5.37 - j7.85	3.65 - j3.30
2200	4.92 - j7.85	3.57 - j3.11
2220	4.46 - j7.97	3.49 - j2.92

Z_{source} = Test circuit impedance as measured from gate to ground.

Z_{load} = Test circuit impedance as measured from drain to ground.



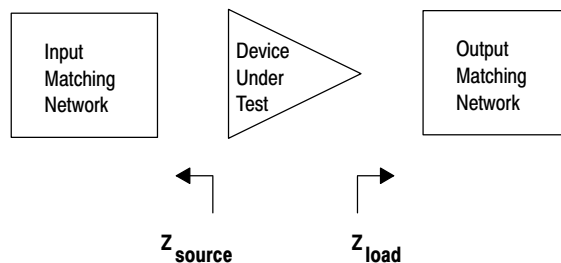


Figure 17. Series Equivalent Source and Load Impedance — Single-Ended Configuration

The diagram shows a mechanical drawing of a MOSFET package with the following dimensions and features:

- Dimensions:**
 - $E1$: Total width of the package.
 - $E3$: Width of the top lead.
 - $2X E3$: Distance from the center of the package to the center of the top lead.
 - $D1$: Total height of the package.
 - $4X e$: Distance from the center of the package to the center of the top lead.
 - $2X D2$: Distance from the center of the package to the center of the bottom lead.
 - $2X F$: Total width of the package.
- Pin Connections:**
 - GATE LEAD:** The top lead, labeled with $2X E3$.
 - DRAIN LEAD:** The bottom lead, labeled with $4X e$.
- Pin Configuration:**
 - Pin 1: Drain (D)
 - Pin 2: Gate (G)
 - Pin 3: Source (S)
- Markings:**
 - Pin 1: $\oplus$
 - Pin 2: $\oplus$
 - Pin 3: $\oplus$
 - Pin 4: $\oplus$
 - Pin 5: $\oplus$
 - Pin 6: $\oplus$
 - Pin 7: $\oplus$
 - Pin 8: $\oplus$
 - Pin 9: $\oplus$
 - Pin 10: $\oplus$
 - Pin 11: $\oplus$
 - Pin 12: $\oplus$
 - Pin 13: $\oplus$
 - Pin 14: $\oplus$
 - Pin 15: $\oplus$
 - Pin 16: $\oplus$
 - Pin 17: $\oplus$
 - Pin 18: $\oplus$
 - Pin 19: $\oplus$
 - Pin 20: $\oplus$
 - Pin 21: $\oplus$
 - Pin 22: $\oplus$
 - Pin 23: $\oplus$
 - Pin 24: $\oplus$
 - Pin 25: $\oplus$
 - Pin 26: $\oplus$
 - Pin 27: $\oplus$
 - Pin 28: $\oplus$
 - Pin 29: $\oplus$
 - Pin 30: $\oplus$
 - Pin 31: $\oplus$
 - Pin 32: $\oplus$
 - Pin 33: $\oplus$
 - Pin 34: $\oplus$
 - Pin 35: $\oplus$
 - Pin 36: $\oplus$
 - Pin 37: $\oplus$
 - Pin 38: $\oplus$
 - Pin 39: $\oplus$
 - Pin 40: $\oplus$
 - Pin 41: $\oplus$
 - Pin 42: $\oplus$
 - Pin 43: $\oplus$
 - Pin 44: $\oplus$
 - Pin 45: $\oplus$
 - Pin 46: $\oplus$
 - Pin 47: $\oplus$
 - Pin 48: $\oplus$
 - Pin 49: $\oplus$
 - Pin 50: $\oplus$
 - Pin 51: $\oplus$
 - Pin 52: $\oplus$
 - Pin 53: $\oplus$
 - Pin 54: $\oplus$
 - Pin 55: $\oplus$
 - Pin 56: $\oplus$
 - Pin 57: $\oplus$
 - Pin 58: $\oplus$
 - Pin 59: $\oplus$
 - Pin 60: $\oplus$
 - Pin 61: $\oplus$
 - Pin 62: $\oplus$
 - Pin 63: $\oplus$
 - Pin 64: $\oplus$
 - Pin 65: $\oplus$
 - Pin 66: $\oplus$
 - Pin 67: $\oplus$
 - Pin 68: $\oplus$
 - Pin 69: $\oplus$
 - Pin 70: $\oplus$
 - Pin 71: $\oplus$
 - Pin 72: $\oplus$
 - Pin 73: $\oplus$
 - Pin 74: $\oplus$
 - Pin 75: $\oplus$
 - Pin 76: $\oplus$
 - Pin 77: $\oplus$
 - Pin 78: $\oplus$
 - Pin 79: $\oplus$
 - Pin 80: $\oplus$
 - Pin 81: $\oplus$
 - Pin 82: $\oplus$
 - Pin 83: $\oplus$
 - Pin 84: $\oplus$
 - Pin 85: $\oplus$
 - Pin 86: $\oplus$
 - Pin 87: $\oplus$
 - Pin 88: $\oplus$
 - Pin 89: $\oplus$
 - Pin 90: $\oplus$
 - Pin 91: $\oplus$
 - Pin 92: $\oplus$
 - Pin 93: $\oplus$
 - Pin 94: $\oplus$
 - Pin 95: $\oplus$
 - Pin 96: $\oplus$
 - Pin 97: $\oplus$
 - Pin 98: $\oplus$
 - Pin 99: $\oplus$
 - Pin 100: $\oplus$

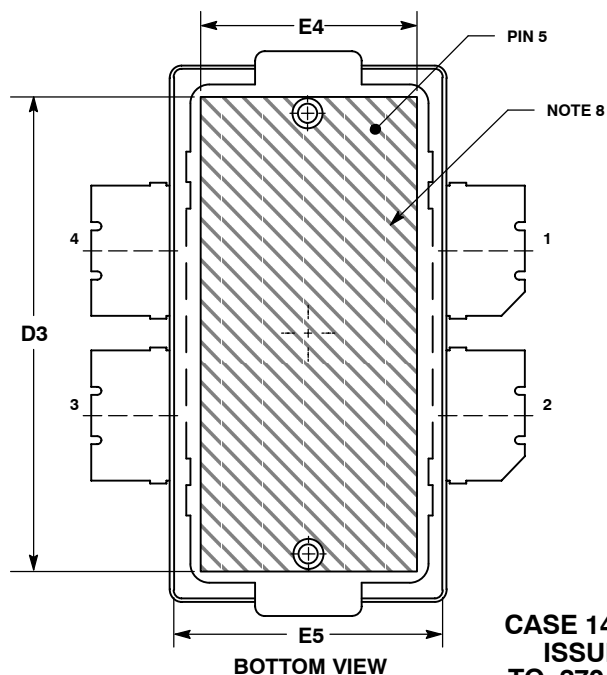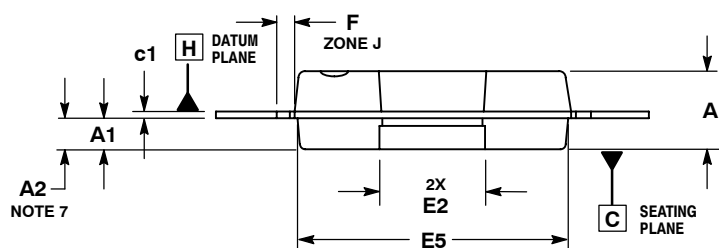

NOTES:

1. CONTROLLING DIMENSION: INCH.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994.
3. DATUM PLANE -H- IS LOCATED AT THE TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
4. DIMENSIONS "D" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D" AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION "J1" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE "b1" DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION A2 APPLIES WITHIN ZONE "J" ONLY.
8. HATCHING REPRESENTS THE EXPOSED AREA OF THE HEAT SLUG.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	.100	.104	2.54	2.64
A1	.039	.043	0.99	1.09
A2	.040	.042	1.02	1.07
D	.712	.720	18.08	18.29
D1	.688	.692	17.48	17.58
D2	.011	.019	0.28	0.48
D3	.600	---	15.24	---
E	.551	.559	.14	14.2
E1	.353	.357	8.97	9.07
E2	.132	.140	3.35	3.56
E3	.124	.132	3.15	3.35
E4	.270	---	6.86	---
E5	.346	.350	8.79	8.89
F	.025 BSC		0.64 BSC	
b1	.164	.170	4.17	4.32
c1	.007	.011	0.18	0.28
e	.106 BSC		2.69 BSC	
aaa	.004		0.10	

STYLE 1:

- PIN 1. DRAIN
 2. DRAIN
 3. GATE
 4. GATE
 5. SOURCE

PRODUCT DOCUMENTATION

Refer to the following documents to aid your design process.

Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers
- AN3263: Bolt Down Mounting Method for High Power RF Transistors and RFICs in Over-Molded Plastic Packages

Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
0	April 2007	• Initial Release of Data Sheet

How to Reach Us:

Home Page:

www.freescale.com

Web Support:

<http://www.freescale.com/support>

USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc.
Technical Information Center, EL516
2100 East Elliot Road
Tempe, Arizona 85284
+1-800-521-6274 or +1-480-768-2130
www.freescale.com/support

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
www.freescale.com/support

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064
Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate
Tai Po, N.T., Hong Kong
+800 2666 8080
support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or 303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2007. All rights reserved.

