



DEVICE NUMBER : DPD-026-072      REV : 1.0  
ECN : \_\_\_\_\_      PAGE : 1/7

## 3mm Silicon PIN Photodiode,T-1

MODEL NO : PD264-6C/L3

---

### ■ Features :

- Fast response time
- High photo sensitivity
- Small junction capacitance

### ■ Description :

PD264-6C/L3 is a high speed and high sensitive PIN photodiode in a standard 3Φ plastic package. The device is spectrally matched to infrared emitting diode.

### ■ Applications :

- High speed photo detector
- Camera
- Infrared remote controller for TVs VCR, audio equipment, air conditioner, etc.

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PD	Silicon	Water clear

---





## 3mm Silicon PIN Photodiode,T-1

MODEL NO : PD264-6C/L3

### ■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit	Notice
Reverse Voltage	$V_R$	32	V	
Power Dissipation	$P_d$	150	mW	
Lead Soldering Temperature	$T_{sol}$	260	°C	4mm from mold body less than 5 seconds
Operating Temperature	$T_{opr}$	-25 ~ +85	°C	
Storage Temperature	$T_{stg}$	-40 ~ +85	°C	

### ■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Rang of Spectral Bandwidth	$\lambda_{0.5}$	----	400---1200	----	nm	----
Wavelength of Peak Sensitivity	$\lambda_p$	----	980	----	nm	----
Open-Circuit Voltage	$V_{OC}$	----	0.44	----	V	$E_e=5mW/cm^2$ $\lambda_p=940nm$
Short-Circuit Current	$I_{SC}$	----	20	----	$\mu A$	
Reverse Light Current	$I_L$	10	20	----	$\mu A$	$E_e=5mW/cm^2$ $\lambda_p=940nm$ $V_R=5V$
Dark Current	$I_D$	----	----	10	nA	$E_e=0mW/cm^2$ $V_R=10V$
Reverse Breakdown Voltage	$B_{VR}$	32	170	----	V	$E_e=0mW/cm^2$ $I_R=100 \mu A$
Total Capacitance	$C_t$	----	10	----	pF	$E_e=0mW/cm^2$ $f=1MHZ$ $V_R=5V$
Rise/Fall Time	$t_r/t_f$	----	10/10	----	nS	$R_L=100 \Omega$ $V_R=10V$



3mm Silicon PIN Photodiode, T-1

MODEL NO : PD264-6C/L3

■ Typical Electrical/Optical/Characteristics Curves

Fig. 1 Power Dissipation vs. Ambient Temperature

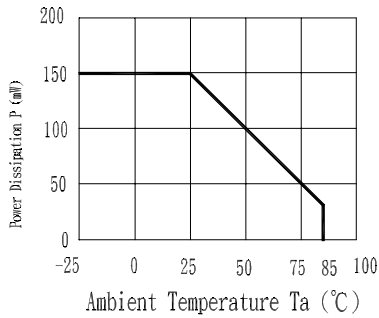


Fig. 2 Spectral Sensitivity

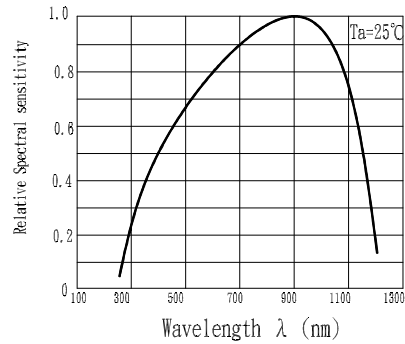


Fig. 3 Dark Current vs. Ambient Temperature

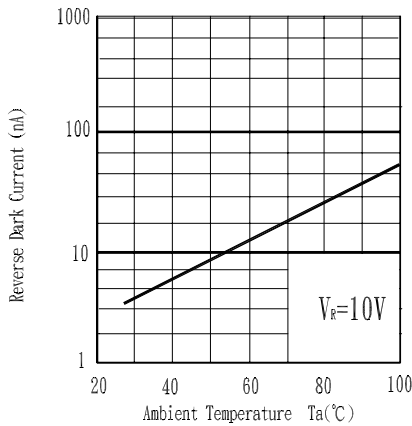


Fig. 4 Reverse Light Current vs.  $E_e$

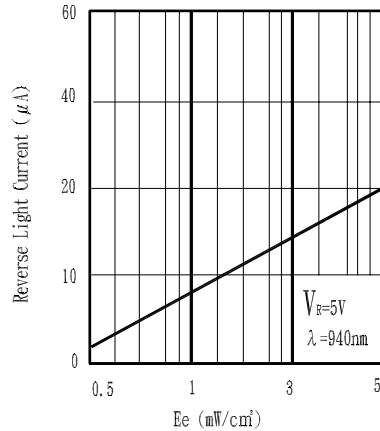


Fig. 5 Terminal Capacitance vs. Reverse Voltage


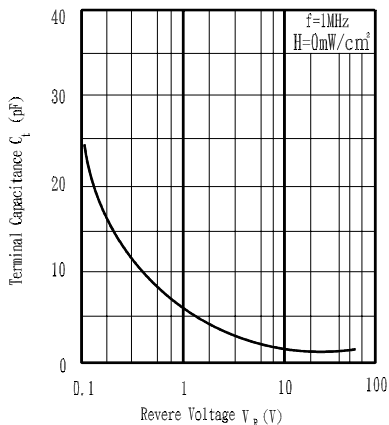


Fig. 6 Response Time vs. Load Resistance



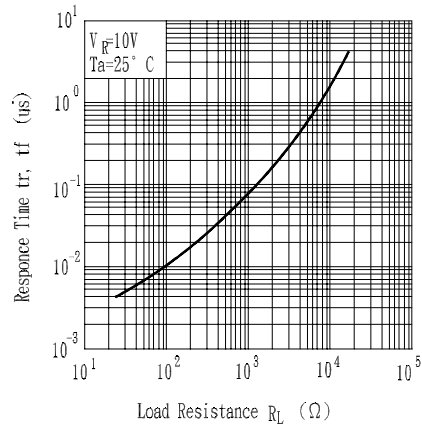

# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPD-026-072      REV : 1.0  
 ECN : \_\_\_\_\_      PAGE : 5/7

## 3mm Silicon PIN Photodiode,T-1



MODEL NO : PD264-6C/L3

### ■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 secs	22 pcs	$I_L \leq L_x \times 0.8$  L :Lower specification limit	0/1
2	Temperature Cycle	H : +85°C    30 mins  L : -55°C    30 mins	50 cycles	22 pcs		0/1
3	Thermal Shock	H : +100°C    5 mins  L : -10°C    5 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	$V_R=5V$	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1



### 3mm Silicon PIN Photodiode,T-1

MODEL NO : PD264-6C/L3


---

#### ■ Test Method For Reverse Light Current

Condition:  $E_e=1\text{mW}/\text{cm}^2, V_R=5\text{V}$

Test Item: Reverse Light Current

Unit :  $\mu\text{A}$

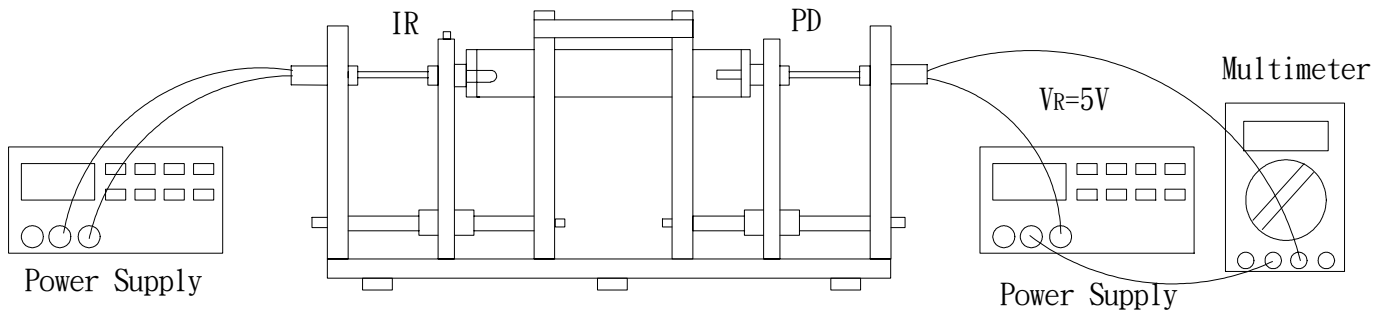




DEVICE NUMBER : DPD-026-072      REV : 1.0  
ECN : \_\_\_\_\_      PAGE : 7/7

## 3mm Silicon PIN Photodiode,T-1

MODEL NO : PD264-6C/L3

### ■ Packing Specifications

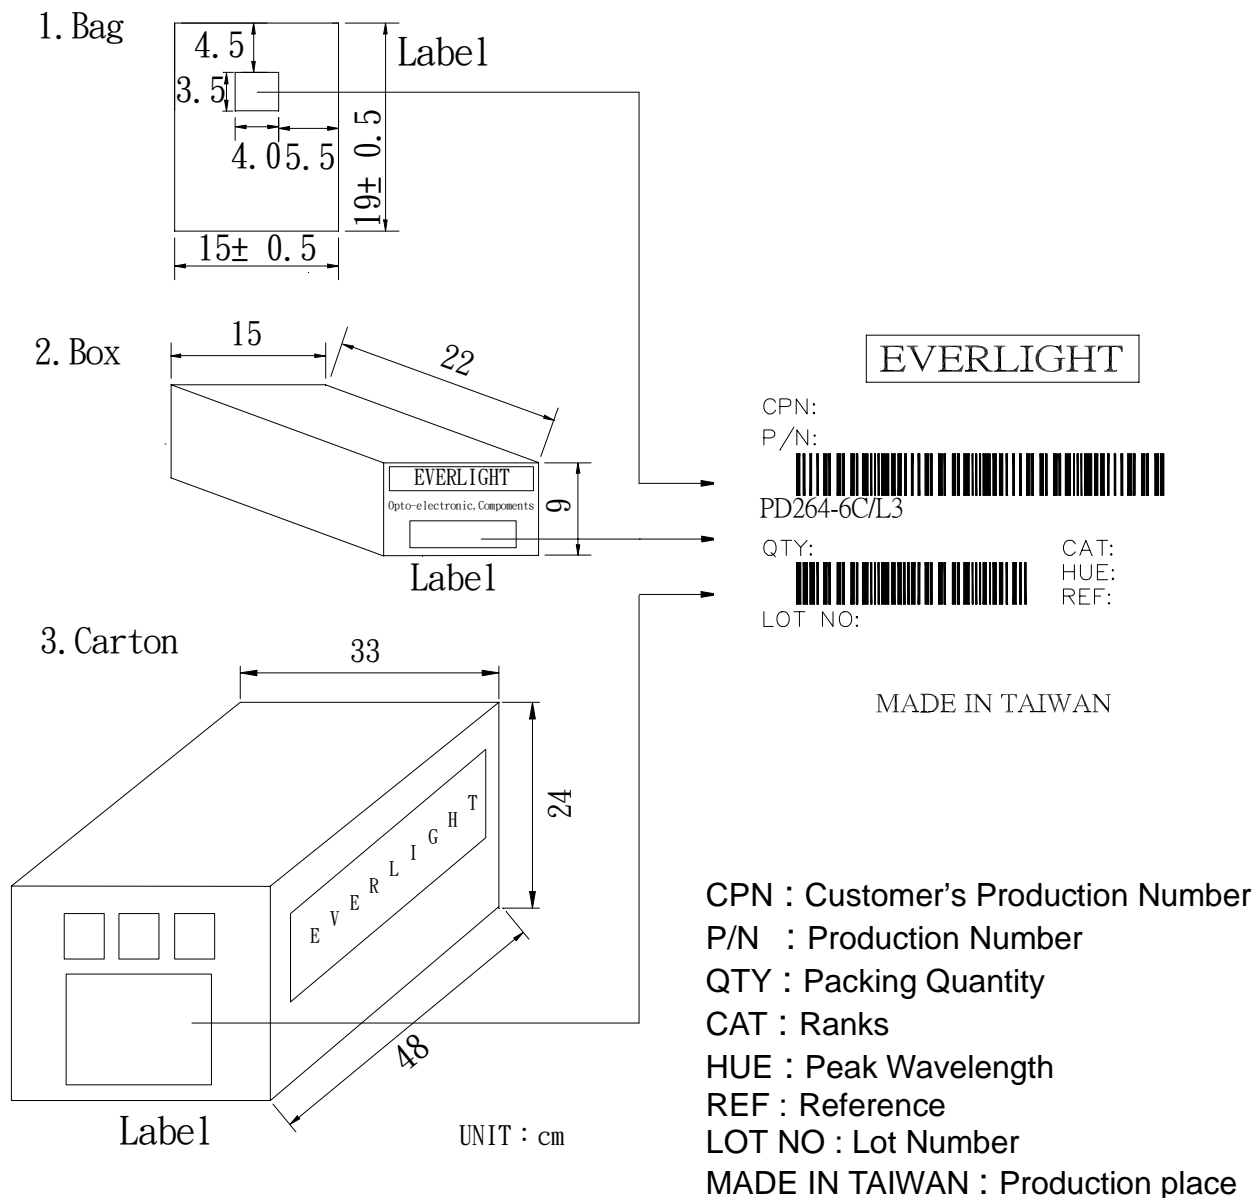

### ■ Packing Quantity Specification

1. 1000 Pcs/1Bag , 4 Bags/1Box
2. 10 Boxes/1Carton