



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

SSR2045CT-28

Designer's Data Sheet


FEATURES:

- Low Reverse Leakage
- Low Forward Voltage Drop
- Hermetically Sealed Surface Mount Package
- Guard Ring for Overvoltage protection
- Eutectic Die Attach
- 175°C Operating Temperature

- TX, TXV and Space Level Screening Available

**20 AMP
45 VOLTS
POSITIVE CENTERTAP
SCHOTTKY
RECTIFIER**

28 PIN CLCC



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	45	Volts
	VRWM		
	VR		
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	20	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C) <i>note 1</i>	IFSM	200	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case, both legs tied together	RθJC	2.2	°C/W

Note 1: Both legs tied together. Package limited.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0141 A

MED

SSR2045CT-28

PRELIMINARY



SOLID STATE DEVICES, INC


14849 Firestone Boulevard · La Mirada, CA 90638
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS (Per Leg)

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA=25°C, 300µs Pulse) (IF = 10 Adc, TA=25°C, 300µs Pulse)	VF1	0.58 0.74	Vdc
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA= - 55°C, 300µs Pulse)	VF2	0.64	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300µs pulse minimum)	IR1	100	µA
Reverse Leakage Current (Rated VR, TA=100°C, 300µs pulse minimum)	IR2	10	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	400	pf

CASE OUTLINE: 28 PIN CLCC PIN OUT:

PIN 5-11: CATHODE
 PIN 1, 15-28: ANODE
 PIN 2, 3, 13, 14: N/C

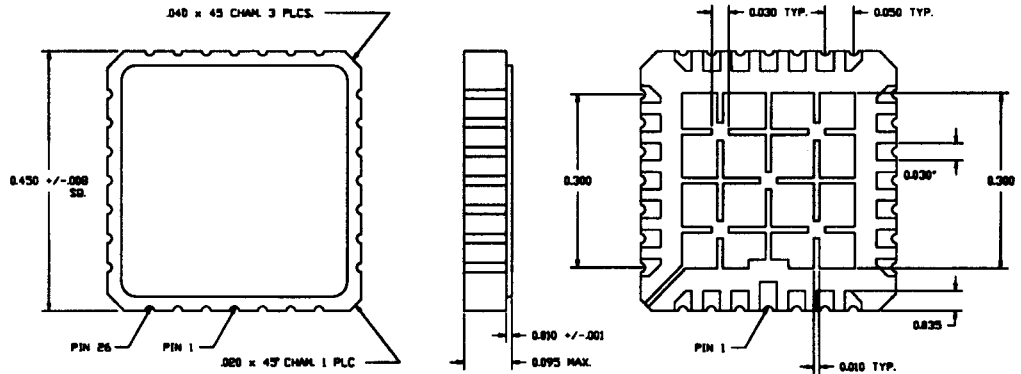

TYPICAL OPERATING CURVES (TA=25°C Unless otherwise specified)

