



GPJ15A~GPJ15M

SINGLE IN-LINE BRIDGE RECTIFIER

VOLTAGE 50 to 1000 Volts **CURRENT** 15 Ampere




Recognized File #E157705

FEATURES

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards
- Pb free product : 99% Sn above can meet RoHS environment substance directive request

MECHANICAL DATA

- Case: Molded plastic body
- Terminals: Plated Leads Solderable per MIL-STD-750, Method 2026
- Polarity: As Marked on Body
- Weight: 4.0 grams (approx.)
- Mounting Position: Any

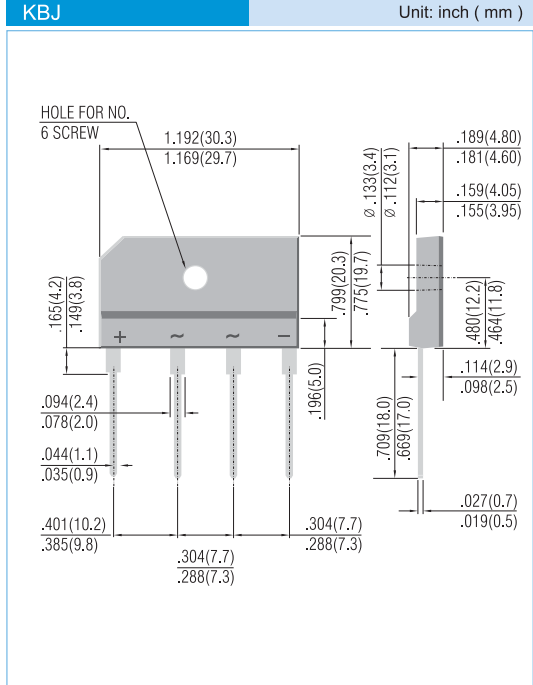

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single Phase, half wave, 60Hz, resistive or inductive load.
For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	GPJ15A	GPJ15B	GPJ15D	GPJ15G	GPJ15J	GPJ15K	GPJ15M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_c=100^\circ\text{C}$	$I_{F(AV)}$	15							A
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	250							A
Maximum Instantaneous Forward Voltage Drop per element at 7.5A	V_F	1.1							V
Maximum Reverse Leakage Current at Rated @ $T_A=25^\circ\text{C}$ Dc Blocking Voltage @ $T_c=100^\circ\text{C}$	I_R	10 500							μA
Typical Thermal Resistance per leg (Note 1)	$R_{\theta JC}$	2.7							$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150							$^\circ\text{C}$

NOTES:

1. Device mounted on 330 x 330 x 1.6mm thick AL plate heatsink.



GPJ15A~GPJ15M

RATING AND CHARACTERISTIC CURVES

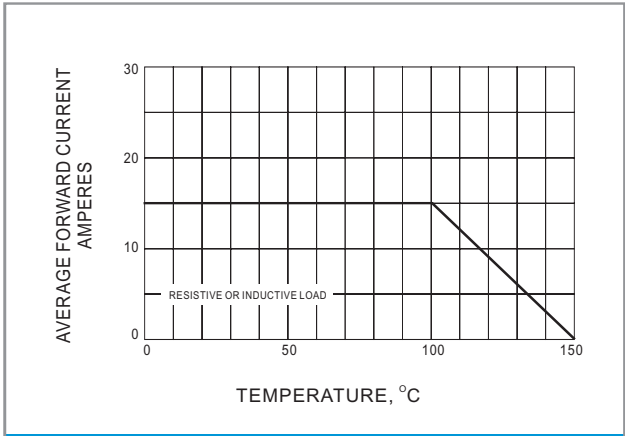


Fig. 1 - FORWARD CURRENT DERATING CURVE

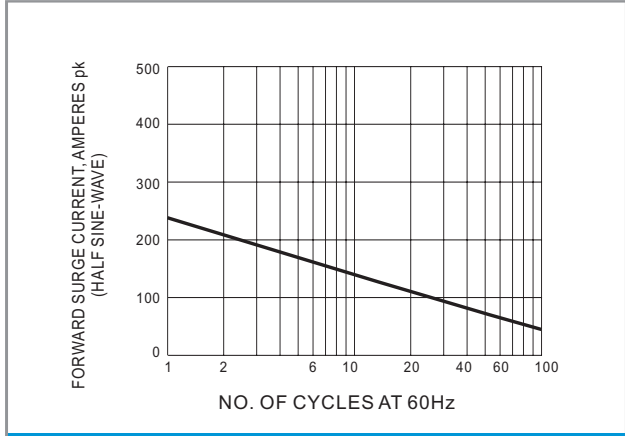


Fig. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

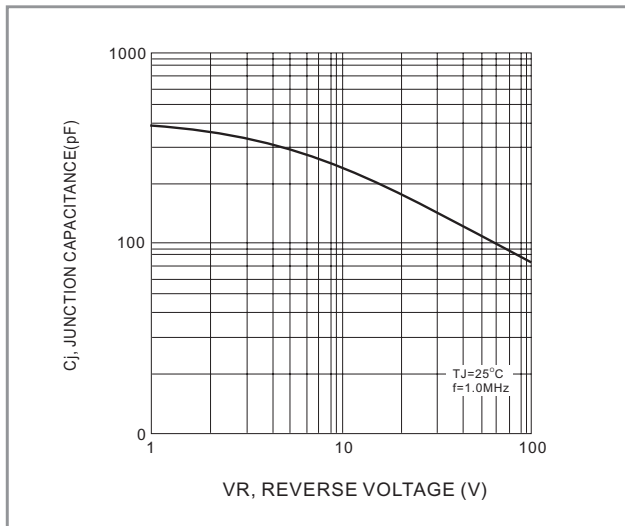


Fig. 3 - TYPICAL JUNCTION CAPACITANCE

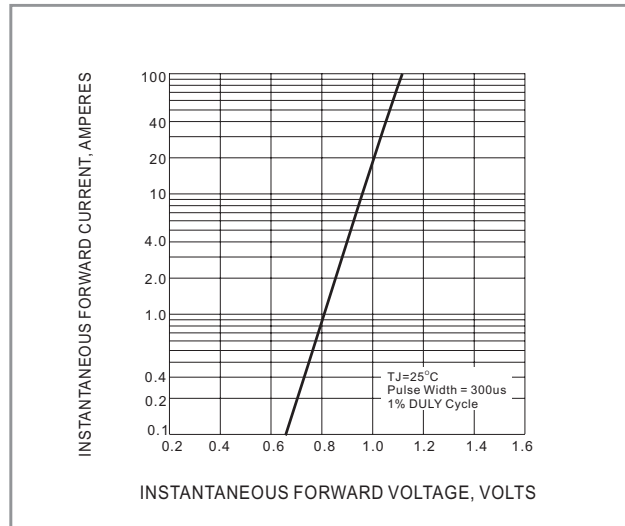


Fig. 4 - TYPICAL FORWARD CHARACTERISTICS PER ELEMENT

LEGAL STATEMENT

Copyright PanJit International, Inc 2006

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.