



MMBD301TS

SURFACE MOUNT SCHOTTKY DIODE

VOLTAGE 30 Volts **POWER** 200mWatts


SOD-523 Unit: inch (mm)

FEATURES

- Low Capacitance : 1.5pF(Max)at $V_R=15V$
- Very Low V_F : 0.36V (Typ) at $I_F = 1mA$
- Extremely Fast Switching Speed
- Pb free product : 99% Sn above can meet RoHS environment substance directive request

MECHANICAL DATA

- Case: SOD-523 plastic case.
- Terminals : Solderable per MIL-STD-750,Method 2026
- Standard packaging: 8mm tape
- Weight: approximately 0.002gram
- Marking : 301

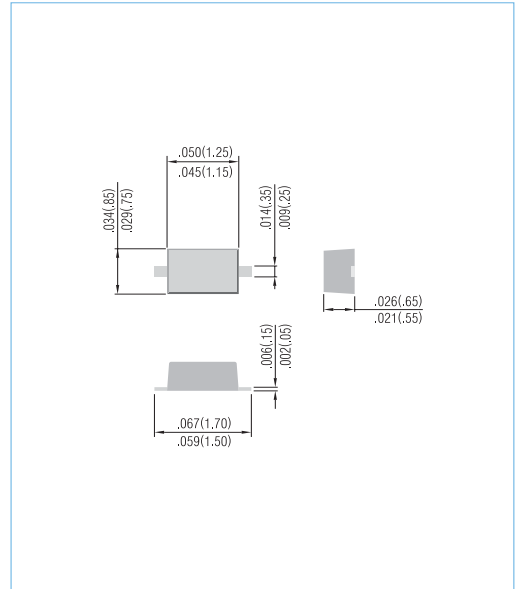

ABSOLUTE RATINGS AND THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	Value	UNITS
Maximum Reverse Voltage	V_R	30	V
Peak Reverse Voltage	V_{RRM}	30	V
Maximum Forward Current	I_F	0.2	A
Power Dissipation(Note 1)	P_{TOT}	200	mW
Thermal Resistance , Junction to Ambient (Note 1)	$R_{\theta JA}$	500	$^{\circ}C / W$
Junction Temperature	T_J	-55 to 125	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}C$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=10\mu A$	30	-	-	V
Reverse Leakage Current	I_R	$V_R=25V$	-	-	0.2	μA
Forward Voltage	V_F	$I_F=1.0mA$	-	-	0.45	V
Forward Voltage	V_F	$I_F=10mA$	-	-	0.6	V
Total Capacitance	C_T	$V_R=15V, f=1.0MHz$	-	-	1.5	pF

NOTE:

1. FR-5 Board = 1.0X0.75X0.062 in.



MMBD301TS

RATING AND CHARACTERISTIC CURVES

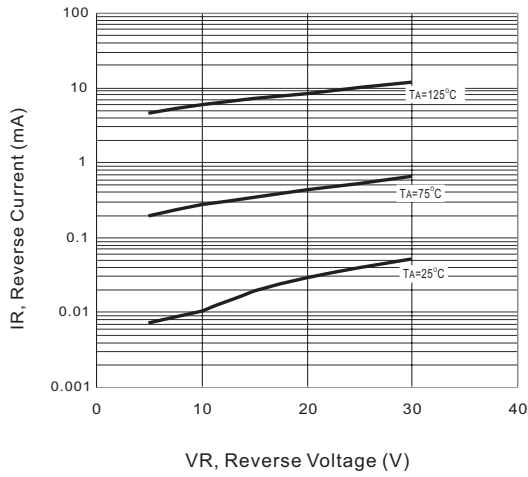


Fig.1 TYPICAL REVERSE CHARACTERISTICS

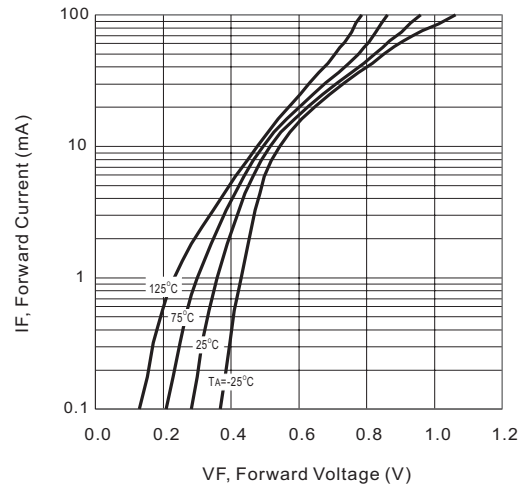


Fig.2-TYPICAL FORWARD CHARACTERISTICS


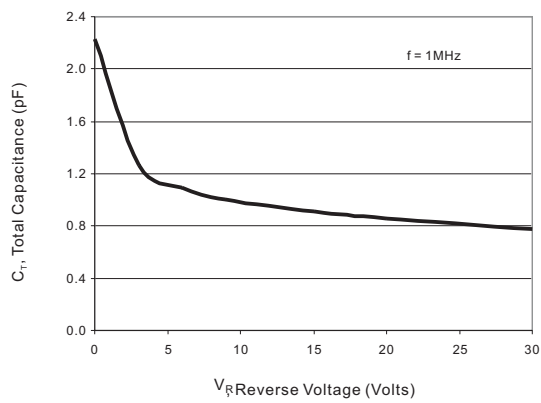


Fig.3 TYPICAL TOTAL CAPACITANCE



MMBD301TS

MOUNTING PAD LAYOUT

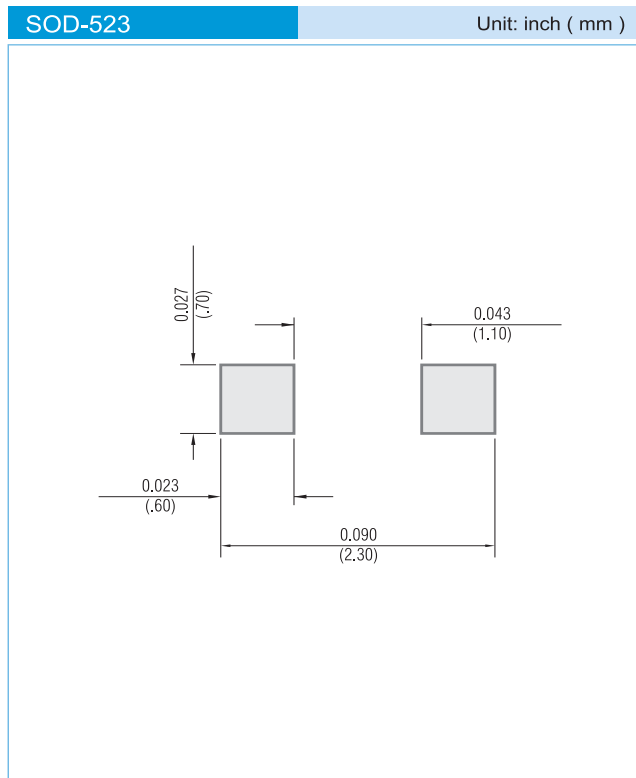

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2006

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.