

**STC2SD882 NPN EPITAXIAL SILICON TRANSISTOR**


**MEDIUM POWER LOW VOLTAGE TRANSISTOR**

**FEATURES**

- \*High current output up to 3A
- \*Low saturation voltage
- \*Complement to 2SB772

**APPLICATIONS**

- \* Audio power amplifier
- \* DC-DC convertor
- \* Voltage regulator

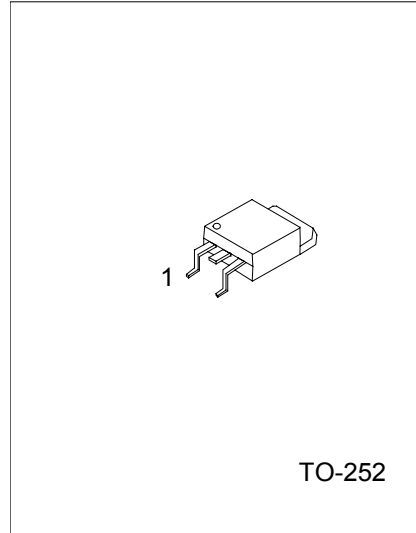

1: BASE 2:COLLECTOR 3: EMITTER

**ABSOLUTE MAXIMUM RATINGS ( Ta=25°C ,unless otherwise specified )**

PARAMETER	SYMBOL	RATING	UNIT
Collector-base voltage	V <sub>CB0</sub>	40	V
Collector-emitter voltage	V <sub>CEO</sub>	30	V
Emitter-base voltage	V <sub>EB0</sub>	5	V
Collector dissipation( T <sub>c</sub> =25°C)	P <sub>c</sub>	10	W
Collector dissipation( T <sub>a</sub> =25°C)	P <sub>c</sub>	1	W
Collector current(DC)	I <sub>c</sub>	3	A
Collector current(PULSE)	I <sub>c</sub>	7	A
Base current	I <sub>B</sub>	0.6	A
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55 ~ +150	°C

**ELECTRICAL CHARACTERISTICS(T<sub>a</sub>=25°C,unless otherwise specified)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =30V, I <sub>E</sub> =0			1000	nA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =3V, I <sub>C</sub> =0			1000	nA
DC current gain(note 1)	h <sub>FE1</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =20mA	30	200		
	h <sub>FE2</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =1A	100	150		
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =2A, I <sub>B</sub> =0.2A		0.3	0.5	V
Base-emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> =2A, I <sub>B</sub> =0.2A		1.0	2.0	V
Current gain bandwidth product	f <sub>T</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =0.1A		80		MHz
Output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz		45		pF

Note 1: Pulse test: PW<300μs, Duty Cycle<2%

**CLASSIFICATION OF hFE2**

RANK	A	B
RANGE	100-200	200-300

**TYPICAL PARAMETERS PERFORMANCE**

Fig.1 Static characteristics




Fig.2 Derating curve of safe operating areas




Fig.3 Power Derating




Fig.4 Collector Output capacitance




Fig.5 Current gain-bandwidth product




Fig.6 Safe operating area




Fig.7 DC current gain




Fig.8 Saturation Voltage

