

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

M5233L, P, FP

DUAL COMPARATOR

DESCRIPTION

The M5233 is a semiconductor circuit for a comparator designed to operate over a wide supply voltage range from 2 to 36V from a single power supply, with two circuits in each 8-pin SIP and 8-pin DIP and 8-pin mini flat package. A differential circuit which is equivalent to a conventional single power supply operational amplifier is used to enable operation from GND level to improve input characteristics. Power dissipation (circuit current) is low and output voltage is large. It fits to a general-purpose comparator for a variety of electronic equipment.

FEATURES

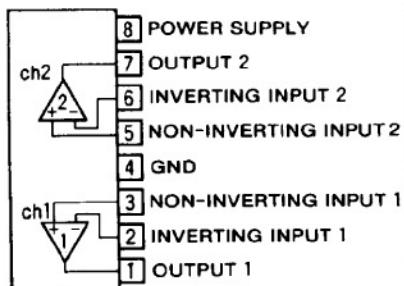
- Wide operating supply voltage range 2V~36V
Dual power supplies: $\pm 1V \sim \pm 18V$
- Low circuit current 0.6mA(typ.)
- Wide common mode input voltage range 0V~ V_{CC} -1.5V (single power supply)
- Open collector output
- Output sink current 25mA
- Response time 1.3 μ sec
- Pin compatible with general-purpose comparators 393, 2930

APPLICATION

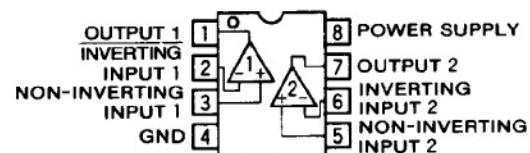
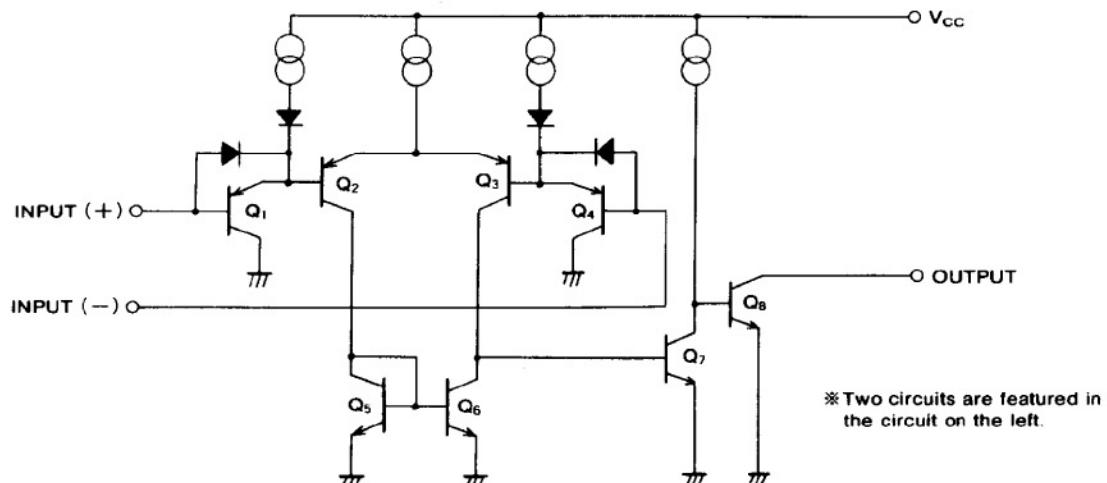
Voltage comparator, window comparator, CR timer, time delay circuit, oscillator, etc.

RECOMMENDED OPERATING CONDITIONS

- Supply voltage range 2~36V
- Rated supply voltage 12V

PIN CONFIGURATION (TOP VIEW)

Outline 8P5 (L)

Outline 8P4 (P)
8P2S-A (FP)**EQUIVALENT CIRCUIT****RENESAS**

DUAL COMPARATOR

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$, unless otherwise noted)

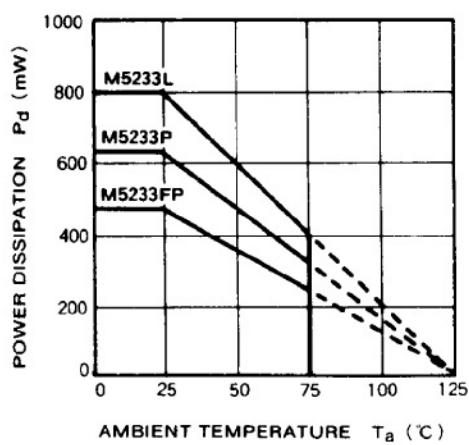
| Symbol | Parameter | Ratings | Unit |
|-----------|---------------------------------|---------------------------|------|
| V_{CC} | Supply voltage | 36(± 18) | V |
| V_{ID} | Differential input voltage | 36 | V |
| V_{ICM} | Common mode input voltage range | -0.3~+36 | V |
| P_d | Power dissipation | 800(SIP)/625(DIP)/440(FP) | mW |
| T_{opr} | Operating temperature | -20~+75 | °C |
| T_{stg} | Storage temperature | -55~+125 | °C |

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V_{CC}=5\text{V}$)

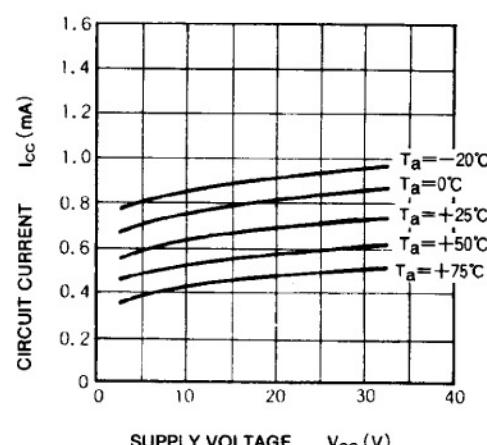
| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------|---------------------------------|--|--------|-----|--------------|------|
| | | | Min | Typ | Max | |
| V_{IO} | Input offset voltage | $V_O=1.4\text{V}$, $V_{REF}=1.4\text{V}$, $R_S=0\Omega$ | | 2 | 5 | mV |
| I_{IO} | Input offset current | | | 5 | 50 | nA |
| I_B | Input bias current | | | 25 | 250 | nA |
| V_{ICM} | Common mode input voltage range | | 0 | | $V_{CC}-1.5$ | V |
| G_V | Voltage gain | $R_L=15\text{k}\Omega$ | | 200 | | V/mV |
| I_{CC} | Circuit current | $R_L=\infty$ | | 0.6 | 1 | mA |
| t_{PLH} | Response time | $R_L=5.1\text{k}\Omega$, $V_{RL}=5\text{V}$ | | 1.3 | | μsec |
| I_{sink} | Output sink current | $V_{IN(-)}=1\text{V}$, $V_{IN(+)}=0\text{V}$, $V_O \leq 1.5\text{V}$ | 10 | 25 | | mA |
| V_{OL} | Output saturation voltage | $V_{IN(-)}=1\text{V}$, $V_{IN(+)}=0\text{V}$, $I_{sink}=8\text{mA}$ | | 200 | 400 | mV |
| I_{LO} | Output leak current | $V_{IN(+)}=1\text{V}$, $V_{IN(-)}=0\text{V}$, $V_O=5\text{V}$ | | 0.1 | | nA |

TYPICAL CHARACTERISTICS

THERMAL DERATING (MAXIMUM RATING)



CIRCUIT CURRENT VS. SUPPLY VOLTAGE



DUAL COMPARATOR