

Silicon NPN Power Transistors

2SD2374 2SD2374A

DESCRIPTION


- With TO-220F package
- Complement to type 2SB1548/1548A
- Low collector saturation voltage
- High forward current transfer ratio h_{FE} which has satisfactory linearity

APPLICATIONS

- For power amplifications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

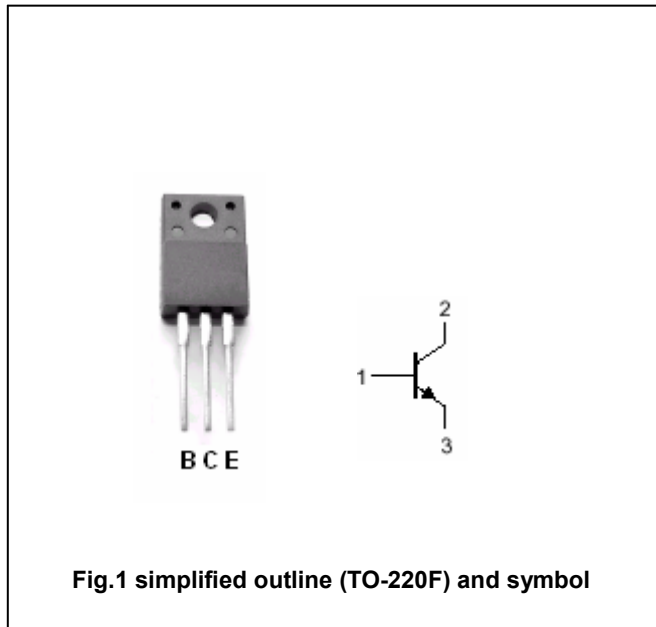

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2SD2374	60	V
		2SD2374A	80	
V_{CEO}	Collector-emitter voltage	2SD2374	60	V
		2SD2374A	80	
V_{EBO}	Emitter-base voltage	Open collector	6	V
I_C	Collector current		3	A
I_{CM}	Collector current-peak		5	A
P_C	Collector dissipation	$T_a=25^\circ\text{C}$	2	W
		$T_C=25^\circ\text{C}$	25	
T_j	Junction temperature		150	°C
T_{stg}	Storage temperature		-55~150	°C

Silicon NPN Power Transistors

2SD2374 2SD2374A

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO}	Collector-emitter voltage	2SD2374	I _C =30mA ; I _B =0	60			V
		2SD2374A		80			
V _{CEsat}	Collector-emitter saturation voltage		I _C =3A ; I _B =0.375A			1.2	V
V _{BE}	Base-emitter voltage		I _C =3A ; V _{CE} =4V			1.8	V
I _{CBO}	Collector cut-off current	2SD2374	V _{CB} =60V ; I _E =0			200	μA
		2SD2374A	V _{CB} =80V ; I _E =0				
I _{CEO}	Collector cut-off current	2SD2374	V _{CE} =30V ; I _B =0			300	μA
		2SD2374A	V _{CE} =60V ; I _B =0				
I _{EBO}	Emitter cut-off current		V _{EB} =6V ; I _C =0			1	mA
h _{FE-1}	DC current gain		I _C =1A ; V _{CE} =4V	70		250	
h _{FE-2}	DC current gain		I _C =3A ; V _{CE} =4V	10			
f _T	Transition frequency		I _C =0.5A ; V _{CE} =10V		30		MHz

Switching times

t _{on}	Turn-on time	I _C =1.0A ; I _{B1} =-I _{B2} =0.1A V _{CC} =50V		0.5		μs
t _s	Storage time			2.5		μs
t _f	Fall time			0.4		μs


◆ h_{FE-1} Classifications

Q	P
70-150	120-250

Silicon NPN Power Transistors

2SD2374 2SD2374A

PACKAGE OUTLINE

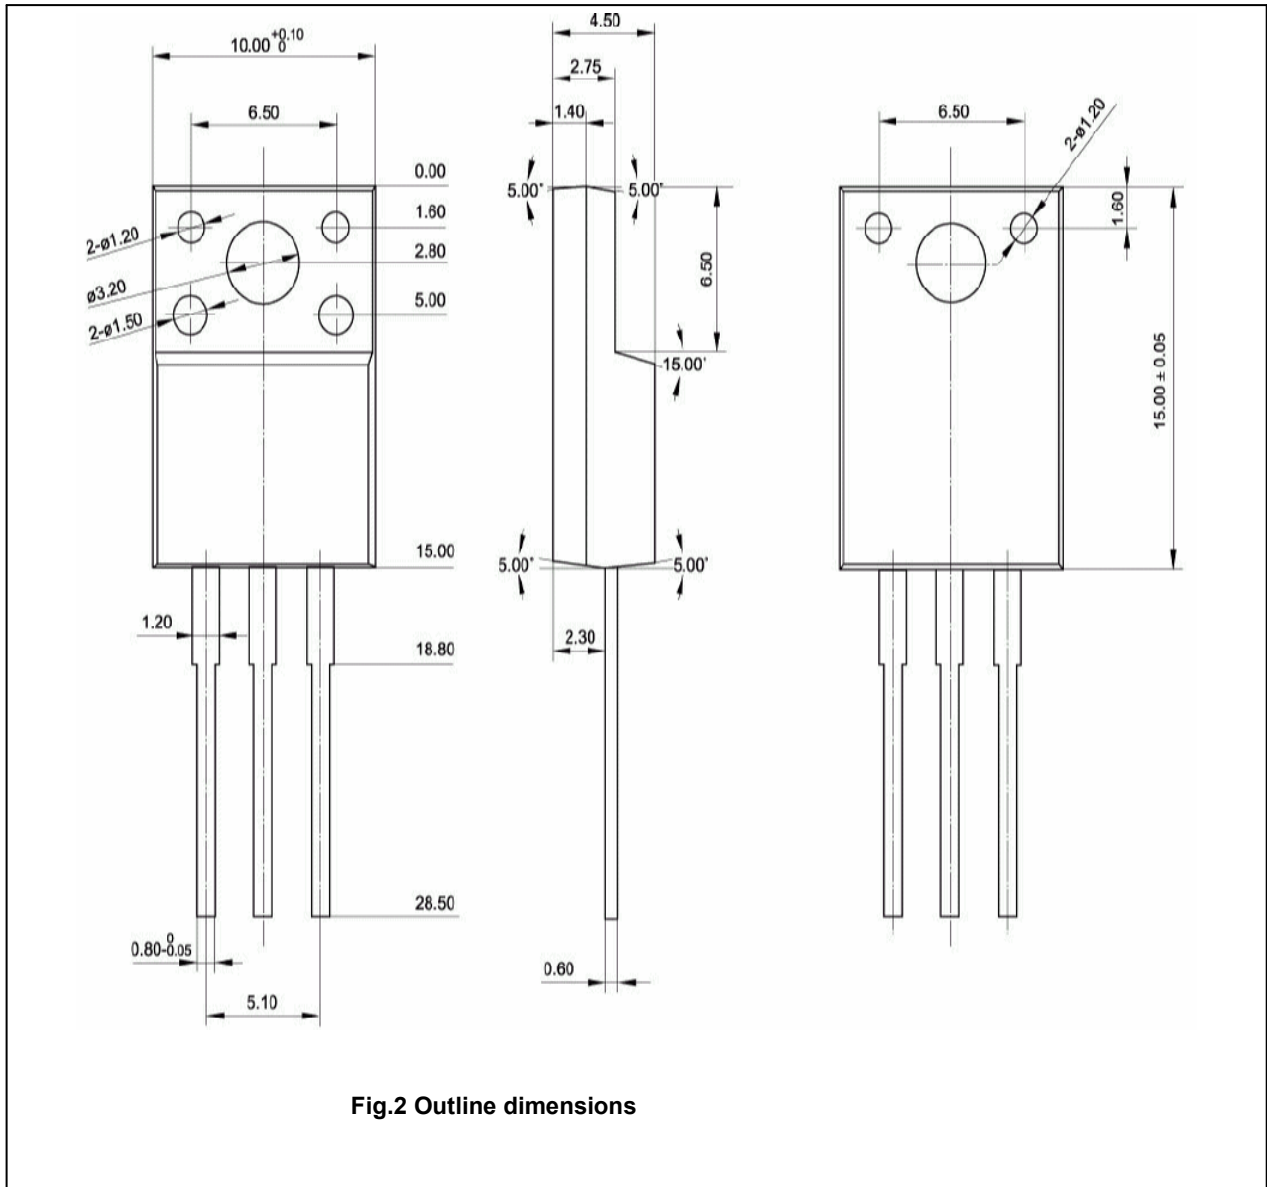

Silicon NPN Power Transistors

2SD2374 2SD2374A

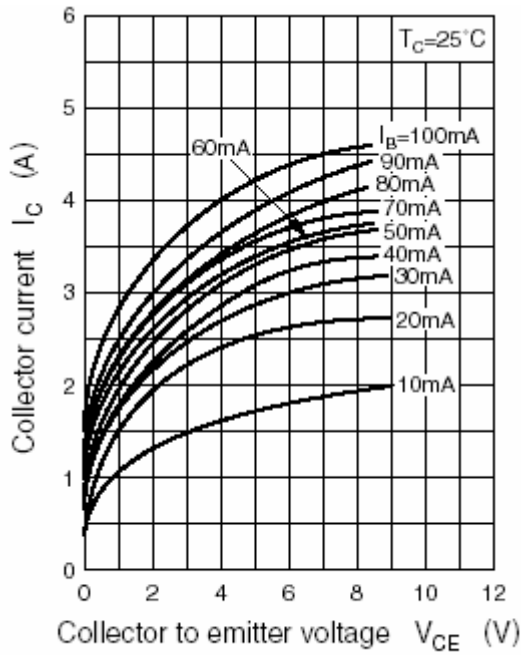


Fig.3 Static Characteristic

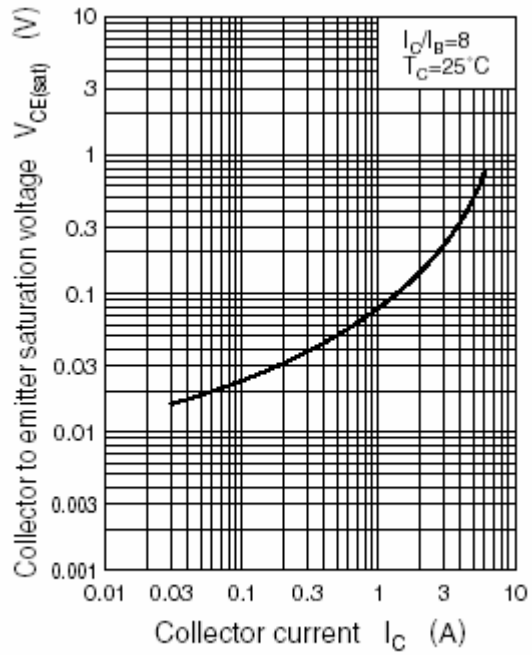


Fig.4 Collector-Emitter Saturation Voltage

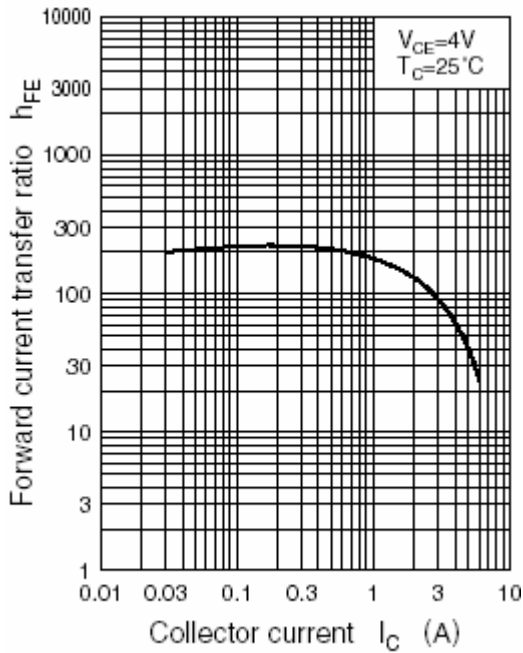


Fig.5 DC current Gain

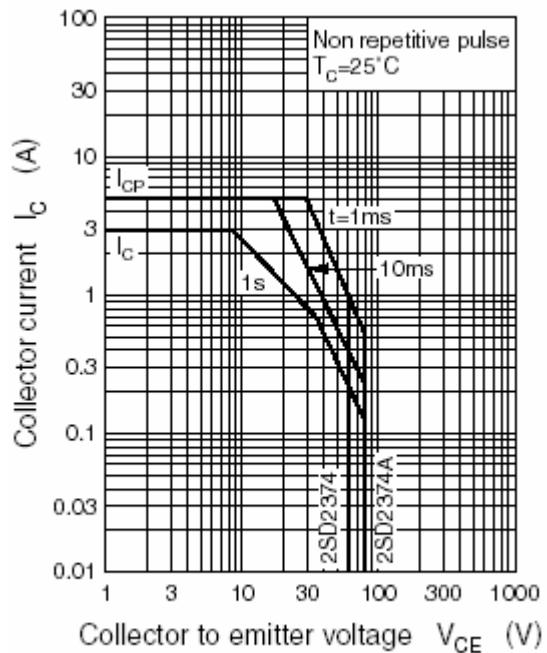


Fig.6 Safe Operating Area